

# TAU Performance System®

TAU Tutorial Bldg. 880/A1N  
Sandia National Laboratories, NM  
Sameer Shende  
[sameer@paratools.com](mailto:sameer@paratools.com)  
<http://www.paratools.com/sandia11>

# Outline - Brief tutorial on the TAU toolset (morning)

---

	Slide #
• Background information, application examples	5
• Overview of different methods of instrumenting applications	16
• Custom profiling	57
• Techniques for manual instrumentation of individual routines	65
• Generating event traces	67
• Running the application; generation of performance data	78
• Analyzing performance data with ParaProf, PerfExplorer	85
• Throttling effect of frequently called small subroutines	122
• Observing I/O bandwidth and volume	126
• PAPI hardware counters	137
• Estimation of tool intrusiveness	153
• Hands-on training with sample codes (provided)	157

# Hands-on analysis of own benchmark application (afternoon)

---

- Review of instrumentation process, address any problems with individual applications
- Determination of routines requiring further investigation, custom profiling if needed
- Running on the RedSky, address any problems with individual application
- Analysis of communication, input/output, scalability, Flop/s using ParaProf and/or PerfExplorer
- Refinement of instrumentation to the users' needs, possible manual instrumentation of individual routines or loops
- Optional: brief presentation of results of individual applications

References:

TAU User Guide

<http://tau.uoregon.edu/tau-usersguide.pdf>

**ParaTools**


# Workshop Goals

---

- This tutorial is an introduction to portable performance evaluation tools.
- You should leave here with a better understanding of...
  - Concepts and steps involved in performance evaluation
  - Understanding key concepts in improving and understanding code performance
  - How to collect and analyze data from hardware performance counters using PAPI
  - How to instrument your programs with TAU
    - Automatic instrumentation at the routine level and outer loop level
    - Manual instrumentation at the loop/statement level
  - Measurement options provided by TAU
  - Environment variables used for choosing metrics, generating performance data
  - How to use the TAU's profile browser, ParaProf
  - How to use TAU's database for storing and retrieving performance data
  - General familiarity with TAU's use for Fortran, Python, C++, C, MPI for mixed language programming
  - How to generate trace data in different formats
  - How to analyze trace data using Vampir, and Jumpshot


---

# Background information, application examples

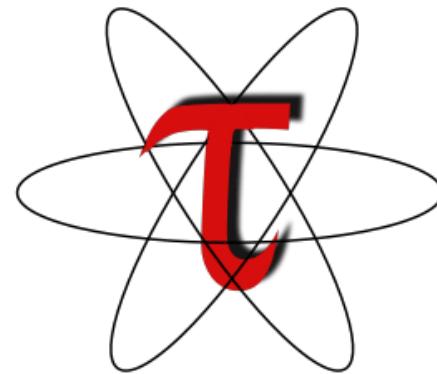

# TAU Performance System

---

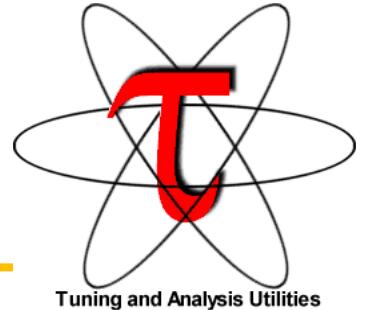

- <http://tau.uoregon.edu/>
- Multi-level performance instrumentation
  - Multi-language automatic source instrumentation
- Flexible and configurable performance measurement
- Widely-ported parallel performance profiling system
  - Computer system architectures and operating systems
  - Different programming languages and compilers
- Support for multiple parallel programming paradigms
  - Multi-threading, message passing, mixed-mode, hybrid
- Integration in complex software, systems, applications

# What is TAU?

---

- TAU is a performance evaluation tool
- It supports parallel profiling and tracing
- Profiling shows you how much (total) time was spent in each routine
- Tracing shows you *when* the events take place in each process along a timeline
- TAU uses a package called PDT for automatic instrumentation of the source code
- Profiling and tracing can measure time as well as hardware performance counters from your CPU
- TAU can automatically instrument your source code (routines, loops, I/O, memory, phases, etc.)
- TAU runs on all HPC platforms and it is free (BSD style license)
- TAU has instrumentation, measurement and analysis tools
  - paraprof is TAU's 3D profile browser
- To use TAU's automatic source instrumentation, you need to set a couple of environment variables and substitute the name of your compiler with a TAU shell script


# TAU Instrumentation Approach

---

- Based on direct performance observation
  - Direct instrumentation of program (system) code (probes)
  - Instrumentation invokes performance measurement
  - Event measurement: performance data, meta-data, context
- Support for standard program events
  - Routines, classes and templates
  - Statement-level blocks and loops
  - Begin/End events (Interval events)
- Support for user-defined events
  - Begin/End events specified by user
  - Atomic events (e.g., size of memory allocated/freed)
  - Flexible selection of event statistics
- Provides static events and dynamic events

# Inclusive and Exclusive Profiles

- Performance with respect to code regions
- Exclusive measurements for region only
- Inclusive measurements includes child regions

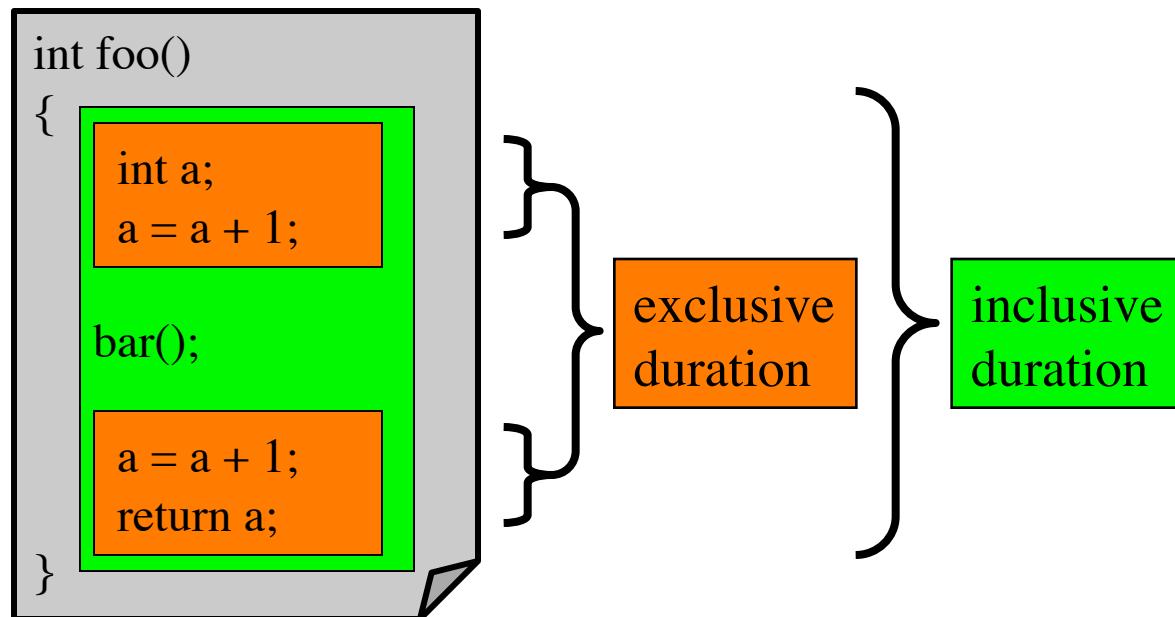

# Interval Events, Atomic Events in TAU

%Time	Exclusive msec	Inclusive total msec	#Call	#Subrs	Inclusive Name usec/call
100.0	0.187	1.105	1	44	1105659 int main(int, char **) C
93.2	1.030	1.030	1	0	1030654 MPI_Init()
5.9	0.879	65	40	320	1637 void func(int, int) C
4.6	51	51	40	0	1277 MPI_BARRIER()
1.2	13	13	120	0	111 MPI_Recv()
0.8	9	9	1	0	9328 MPI_Finalize()
0.0	0.137	0.137	120	0	1 MPI_Send()
0.0	0.086	0.086	40	0	2 MPI_Bcast()
0.0	0.002	0.002	1	0	2 MPI_Comm_size()
0.0	0.001	0.001	1	0	1 MPI_Comm_rank()

Interval event  
e.g., routines  
(start/stop)

USER EVENTS Profile :NODE 0, CONTEXT 0, THREAD 0						
NumSamples	MaxValue	MinValue	MeanValue	Std. Dev.	Event Name	
365	5.138E+04	44.39	3.09E+04	1.234E+04	Heap Memory Used (KB) : Entry	
365	5.138E+04	2064	3.115E+04	1.21E+04	Heap Memory Used (KB) : Exit	
40	40	40	40	0	Message size for broadcast	

Atomic events  
(trigger with  
value)

```
% setenv TAU_CALLPATH_DEPTH      0
% setenv TAU_TRACK_HEAP 1
```

# Atomic Events, Context Events

%Time	Exclusive msec	Inclusive total msec	#Call	#Subrs	Inclusive Name usec/call
100.0	0.253	1.106	1	44	1106701 int main(int, char **) C
93.2	1.031	1.031	1	0	1031311 MPI_Init()
6.0	1	66	40	320	1650 void func(int, int) C
5.7	63	63	40	0	1588 MPI_Barrier()
0.8	9	9	1	0	9119 MPI_Finalize()
0.1	1	1	120	0	10 MPI_Recv()
0.0	0.141	0.141	120	0	1 MPI_Send()
0.0	0.085	0.085	40	0	2 MPI_Bcast()
0.0	0.001	0.001	1	0	1 MPI_Comm_size()
0.0	0	0	1	0	0 MPI_Comm_rank()

USER EVENTS Profile :NODE 0, CONTEXT 0, THREAD 0

NumSamples	MaxValue	MinValue	MeanValue	Std. Dev.	Event Name
40	40	40	40	0	Message size for broadcast
365	5.139E+04	44.39	3.091E+04	1.234E+04	Heap Memory Used (KB) : Entry
40	5.139E+04	3097	3.114E+04	1.227E+04	Heap Memory Used (KB) : Entry : MPI_Barrier()
40	5.139E+04	1.13E+04	3.134E+04	1.187E+04	Heap Memory Used (KB) : Entry : MPI_Bcast()
1	2067	2067	2067	0	Heap Memory Used (KB) : Entry : MPI_Comm_rank()
1	2066	2066	2066	0	Heap Memory Used (KB) : Entry : MPI_Comm_size()
1	5.139E+04	5.139E+04	5.139E+04	0.0006905	Heap Memory Used (KB) : Entry : MPI_Finalize()
1	57.56	57.56	57.56	0	Heap Memory Used (KB) : Entry : MPI_Init()
120	5.139E+04	1.13E+04	3.134E+04	1.187E+04	Heap Memory Used (KB) : Entry : MPI_Recv()
120	5.139E+04	1.129E+04	3.134E+04	1.187E+04	Heap Memory Used (KB) : Entry : MPI_Send()
1	44.39	44.39	44.39	0	Heap Memory Used (KB) : Entry : int main(int, char **) C
40	5.036E+04	2068	3.011E+04	1.227E+04	Heap Memory Used (KB) : Entry : void func(int, int) C

% setenv TAU\_CALLPATH\_DEPTH 1  
% setenv TAU\_TRACK\_HEAP 1

Atomic event

Context event  
= atomic event  
+ executing context

# Context Events (Default)

```
NODE 0:CONTEXT 0:THREAD 0:
-----
```

%Time	Exclusive msec	Inclusive total msec	#Call	#Subrs	Inclusive Name usec/call
100.0	0.357	1.114	1	44	1114040 int main(int, char **) C
92.6	1.031	1.031	1	0	1031066 MPI_Init()
6.7	72	74	40	320	1865 void func(int, int) C
0.7	8	8	1	0	8002 MPI_Finalize()
0.1	1	1	120	0	12 MPI_Recv()
0.1	0.608	0.608	40	0	15 MPI_BARRIER()
0.0	0.136	0.136	120	0	1 MPI_Send()
0.0	0.095	0.095	40	0	2 MPI_Bcast()
0.0	0.001	0.001	1	0	1 MPI_Comm_size()
0.0	0	0	1	0	0 MPI_Comm_rank()

```
USER EVENTS Profile :NODE 0, CONTEXT 0, THREAD 0
-----
```


NumSamples	MaxValue	MinValue	MeanValue	Std. Dev.	Event Name
365	5.139E+04	44.39	3.091E+04	1.234E+04	Heap Memory Used (KB) : Entry
1	44.39	44.39	44.39	0	Heap Memory Used (KB) : Entry : int main(int, char **) C
1	2068	2068	2068	0	Heap Memory Used (KB) : Entry : int main(int, char **) C => MPI_Comm_rank()
1	2066	2066	2066	0	Heap Memory Used (KB) : Entry : int main(int, char **) C => MPI_Comm_size()
1	5.139E+04	5.139E+04	5.139E+04	0	Heap Memory Used (KB) : Entry : int main(int, char **) C => MPI_Finalize()
1	57.58	57.58	57.58	0	Heap Memory Used (KB) : Entry : int main(int, char **) C => MPI_Init()
40	5.036E+04	2069	3.011E+04	1.228E+04	Heap Memory Used (KB) : Entry : int main(int, char **) C => void func(int, int) C
40	5.139E+04	3098	3.114E+04	1.227E+04	Heap Memory Used (KB) : Entry : void func(int, int) C => MPI_BARRIER()
40	5.139E+04	1.13E+04	3.134E+04	1.187E+04	Heap Memory Used (KB) : Entry : void func(int, int) C => MPI_Bcast()
120	5.139E+04	1.13E+04	3.134E+04	1.187E+04	Heap Memory Used (KB) : Entry : void func(int, int) C => MPI_Recv()
120	5.139E+04	1.13E+04	3.134E+04	1.187E+04	Heap Memory Used (KB) : Entry : void func(int, int) C => MPI_Send()
365	5.139E+04	2065	3.116E+04	1.21E+04	Heap Memory Used (KB) : Exit

3.7


17  
Context event  
= atomic event  
+ executing context

```
% setenv TAU_CALLPATH_DEPTH 2
% setenv TAU_TRACK_HEAP 1
```

# ParaProf: Mflops Sorted by Exclusive Time

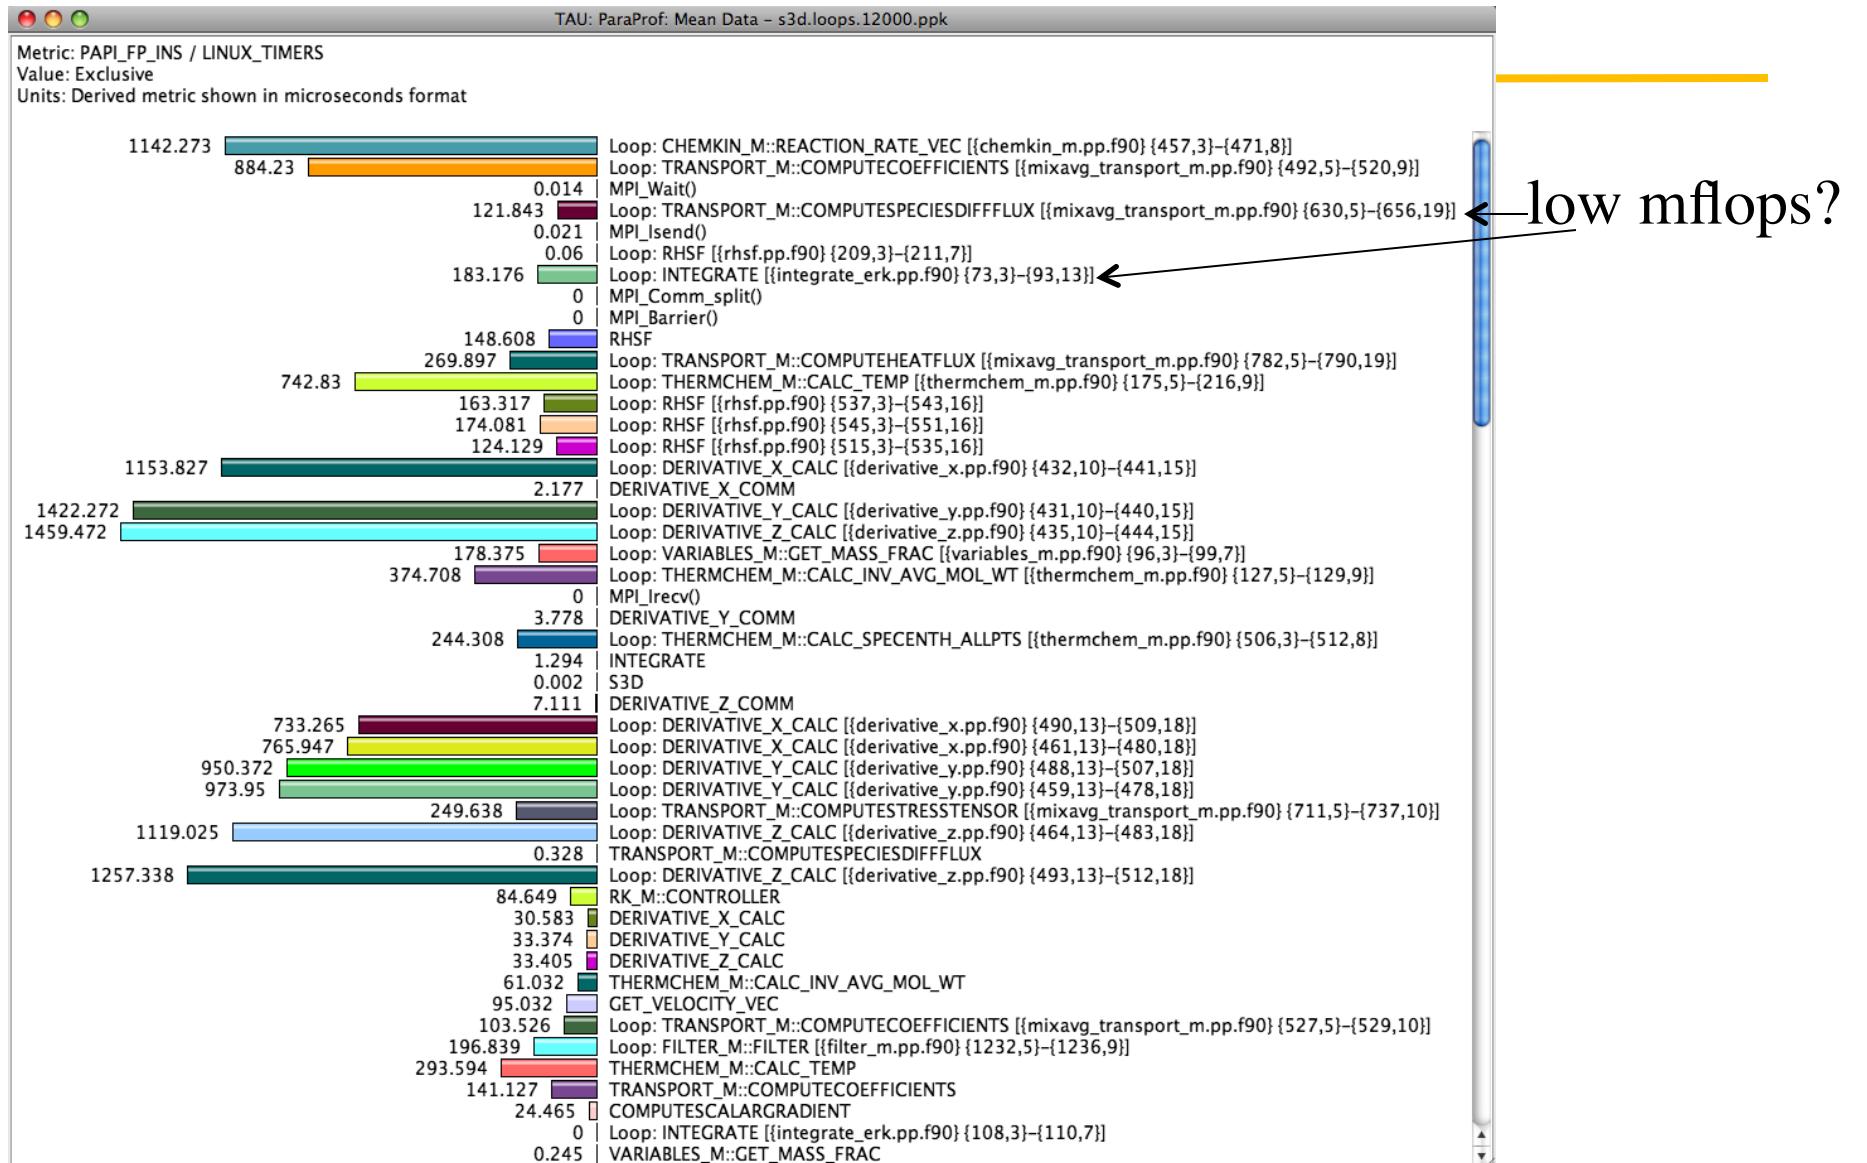

# Parallel Profile Visualization: ParaProf

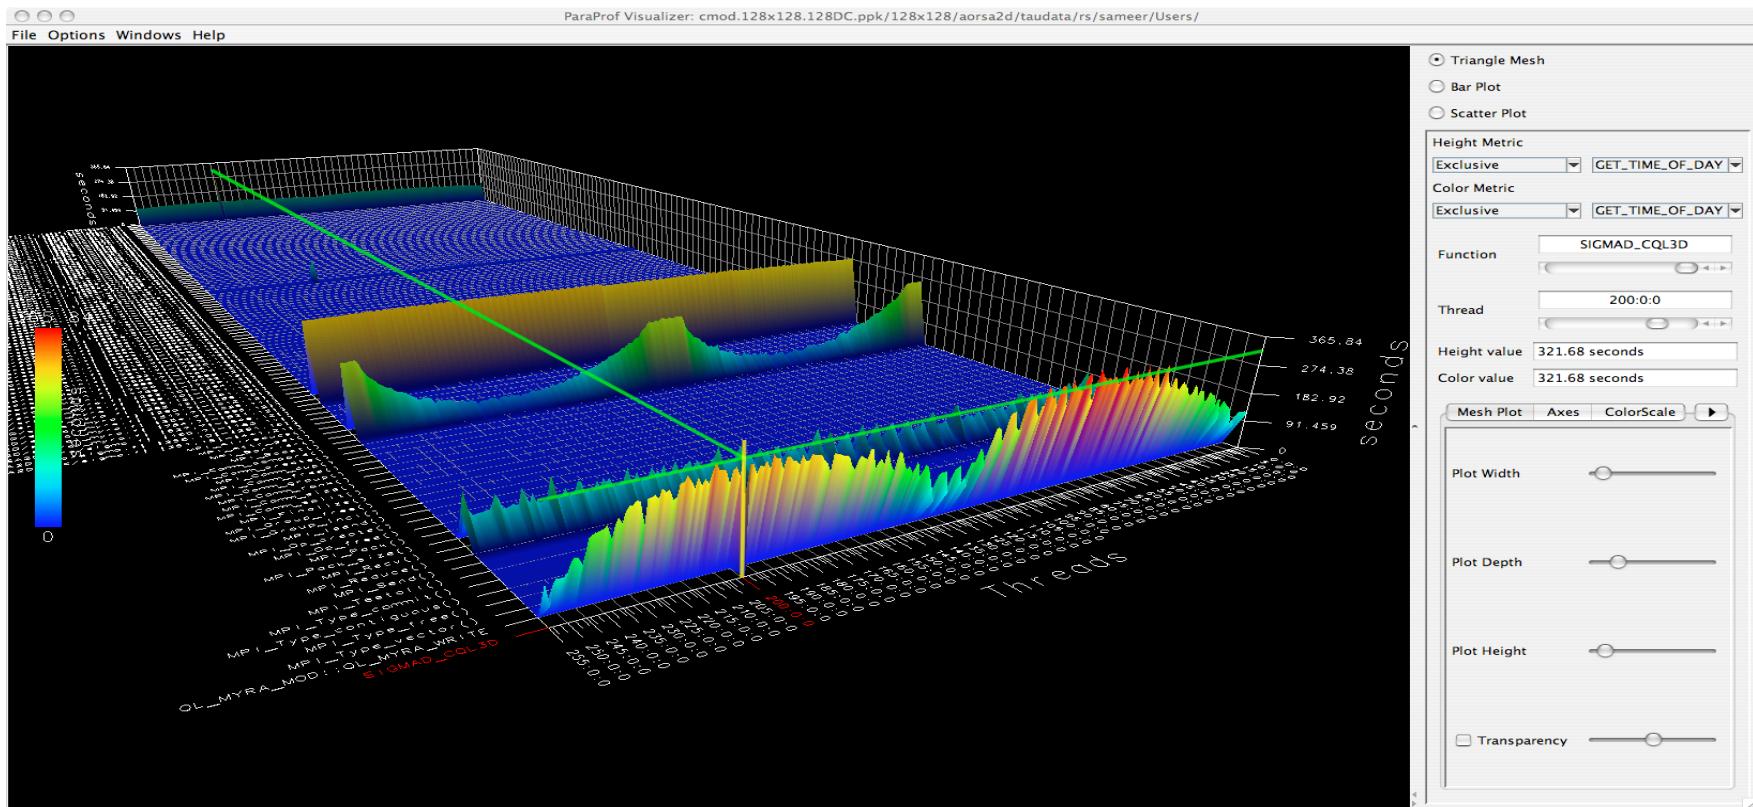


# Steps of Performance Evaluation

---

- Collect basic routine-level timing profile to determine where most time is being spent
- Collect routine-level hardware counter data to determine types of performance problems
- Collect callpath profiles to determine sequence of events causing performance problems
- Conduct finer-grained profiling and/or tracing to pinpoint performance bottlenecks
  - Loop-level profiling with hardware counters
  - Tracing of communication operations

---

# Overview of different methods of instrumenting applications

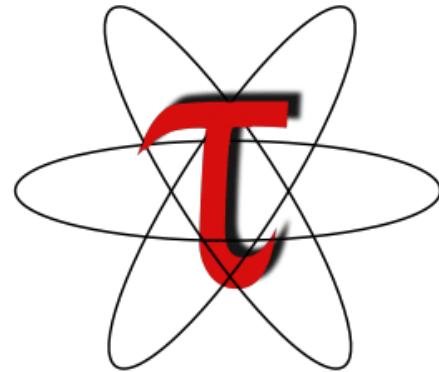

# Instrumentation: Events in TAU

---

- Event types
  - Interval events (begin/end events)
    - measures performance between begin and end
    - metrics monotonically increase
  - Atomic events
    - used to capture performance data state
- Code events
  - Routines, classes, templates
  - Statement-level blocks, loops
- User-defined events
  - Specified by the user
- Abstract mapping events

# Instrumentation Techniques

---





- Events defined by instrumentation access
- Instrumentation levels
  - Source code
  - Object code
  - Runtime system
  - Library code
  - Executable code
  - Operating system
- Different levels provide different information
- Different tools needed for each level
- Levels can have different granularity

# Instrumentation Techniques


---

- Static instrumentation
  - Program instrumented prior to execution
- Dynamic instrumentation
  - Program instrumented at runtime
- Manual and automatic mechanisms
- Tool required for automatic support
  - Source time: preprocessor, translator, compiler
  - Link time: wrapper library, preload
  - Execution time: binary rewrite, dynamic
- Advantages / disadvantages


# TAU Performance System Components

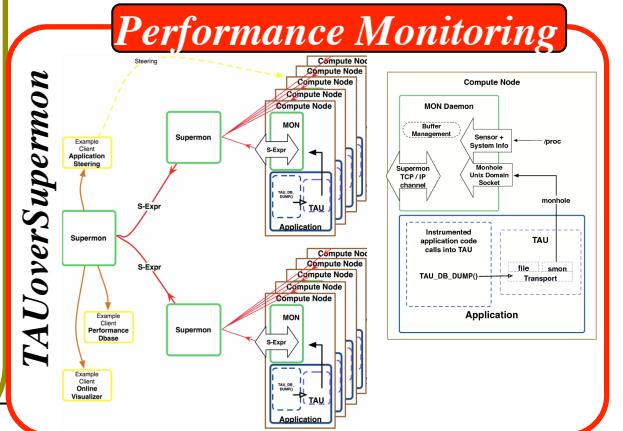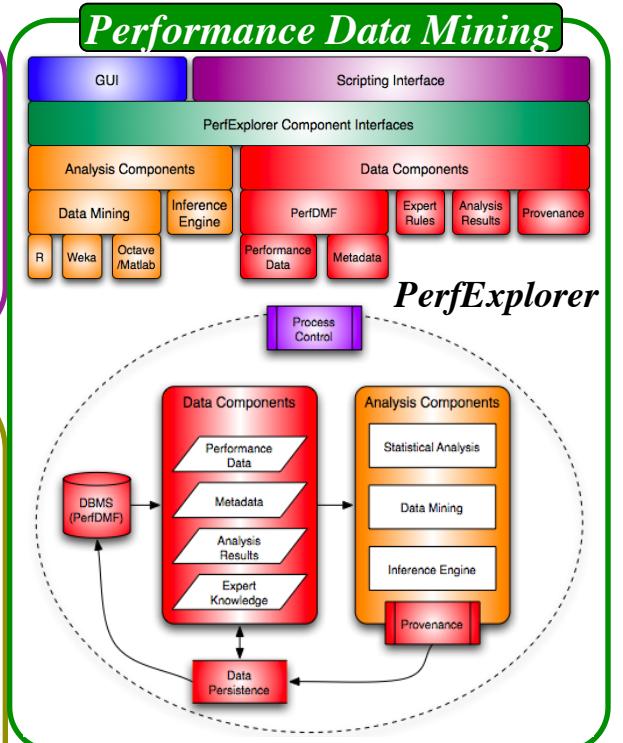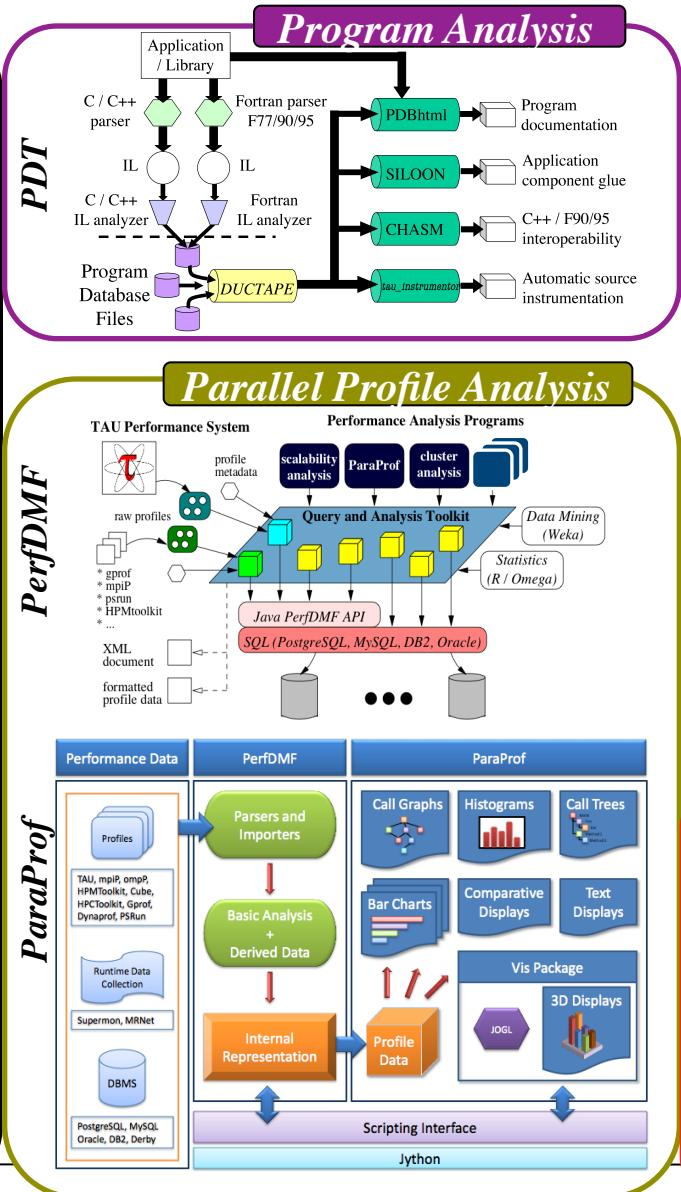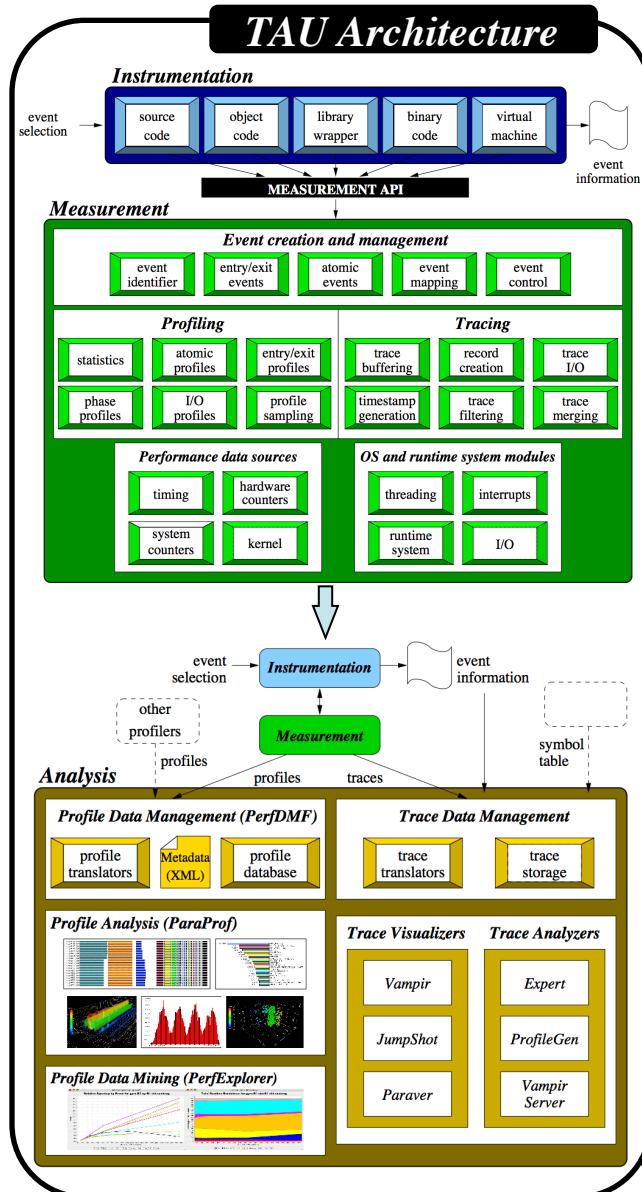


# TAU Performance System Architecture

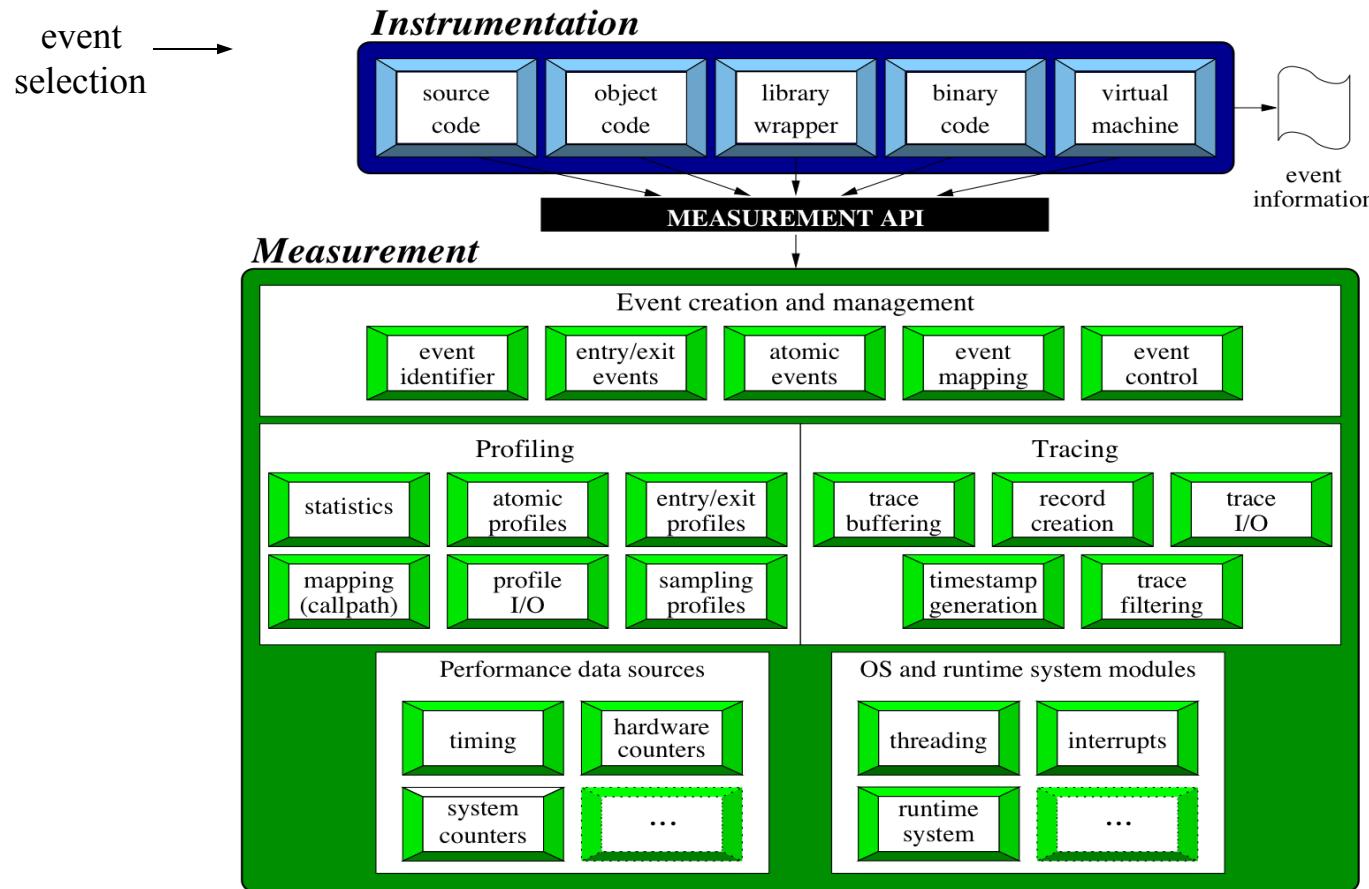

# Program Database Toolkit (PDT)

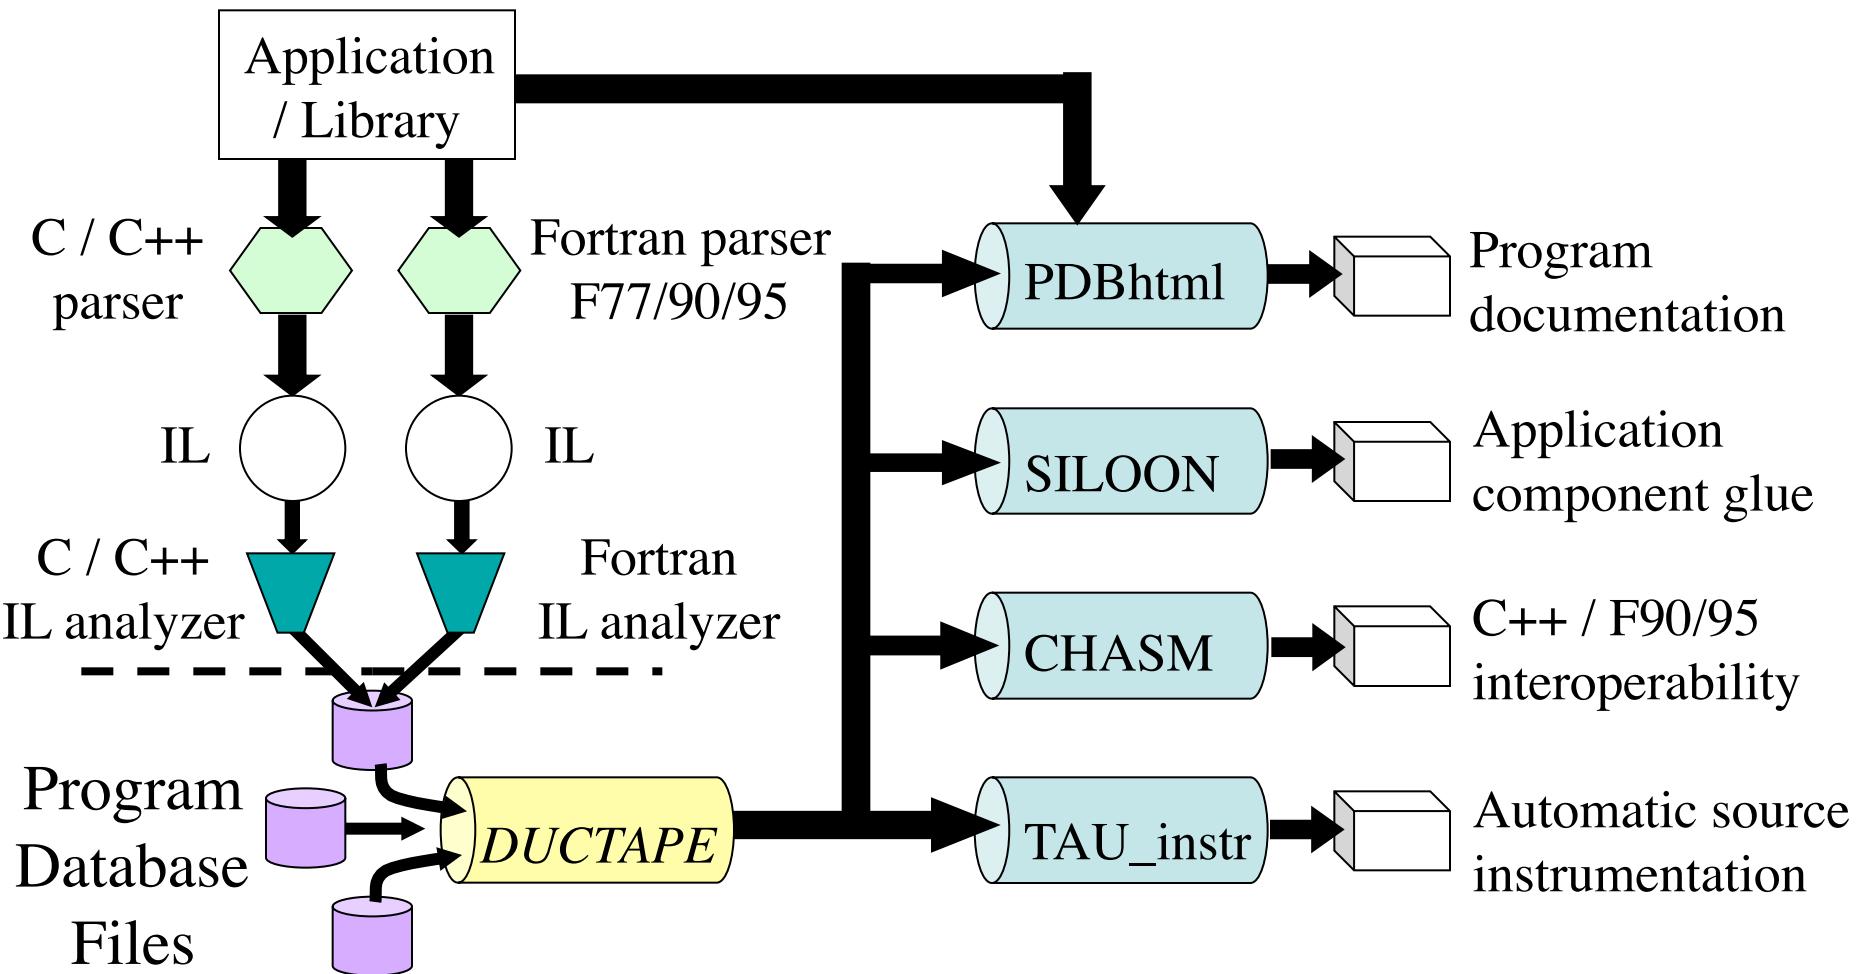


# Automatic Source-Level Instrumentation in TAU using Program Database Toolkit (PDT)

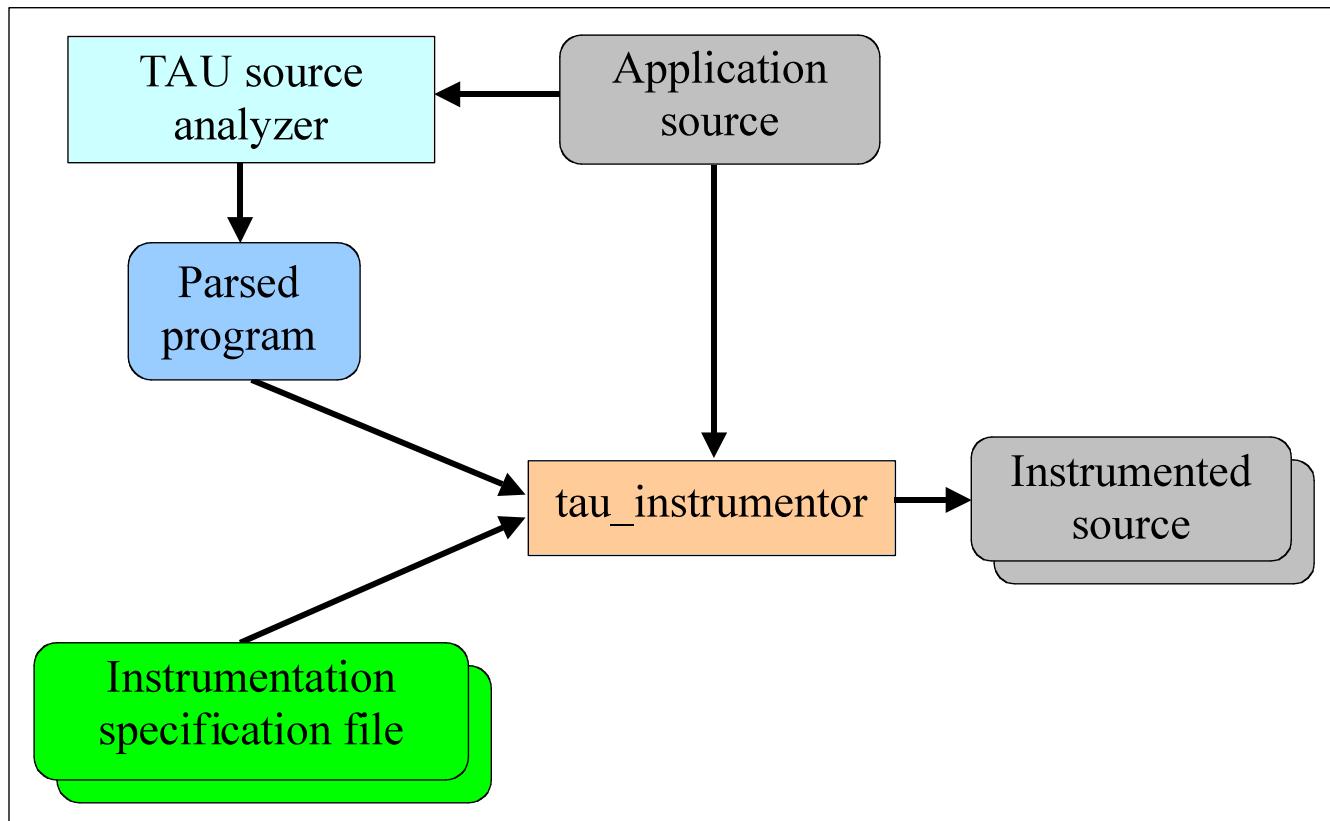

# Direct Observation: Mapping

- Associate performance data with high-level semantic abstractions
- Abstract events at user-level provide semantic context

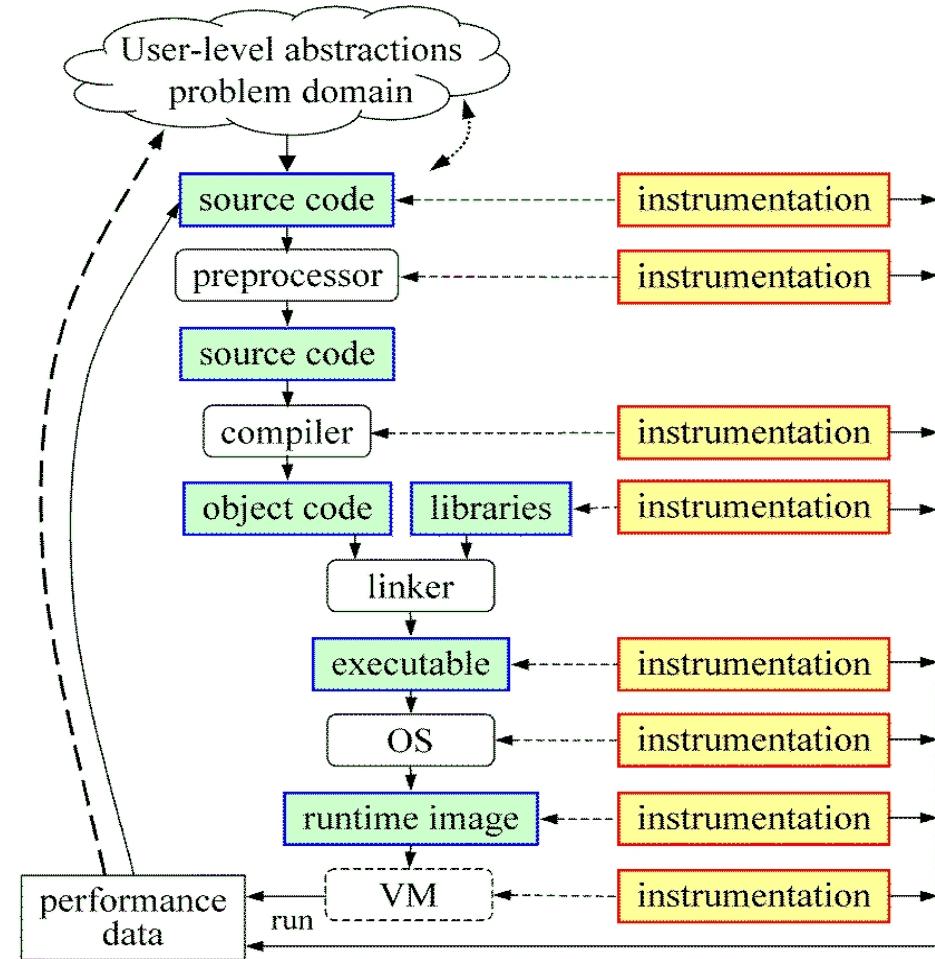

# Using TAU: A brief Introduction

---

- TAU supports several measurement options (profiling, tracing, profiling with hardware counters, etc.)
- Each measurement configuration of TAU corresponds to a unique stub makefile and library that is generated when you configure it
- To instrument source code using PDT
  - Choose an appropriate TAU stub makefile in <arch>/lib:  
% source /projects/tau/tau.bashrc (or .cshrc)  
% export TAU\_MAKEFILE=\$TAU\_ROOT/lib/Makefile.tau-papi-mpi-pdt-pgi  
% export TAU\_OPTIONS=' -optVerbose ...' (see tau\_compiler.sh -help)  
And use tau\_f90.sh, tau\_cxx.sh or tau\_cc.sh as Fortran, C++ or C compilers:  
% mpif90 foo.f90  
changes to  
% **tau\_f90.sh** foo.f90
- Execute application and analyze performance data:  
% pprof (for text based profile display)  
% paraprof (for GUI)

# TAU Measurement Configuration

---

```
% cd $TAU_ROOT/lib; ls Makefile.*  
Makefile.tau-pdt-pgi  
Makefile.tau-mpi-pdt-pgi  
Makefile.tau-pthread-pdt-pgi  
Makefile.tau-papi-mpi-pdt-pgi  
Makefile.tau-papi-pthread-pdt-pgi  
Makefile.tau-mpi-papi-pdt-pgi
```

- For an MPI+F90 application, you may want to start with:

**Makefile.tau-mpi-pdt-pgi**

- Supports MPI instrumentation & PDT for automatic source instrumentation
- % export TAU\_MAKEFILE=\$TAU\_ROOT/lib/Makefile.tau-mpi-pdt-pgi
- % tau\_f90.sh matrix.f90 -o matrix

# Usage Scenarios: Routine Level Profile


---

- Goal: What routines account for the most time? How much?
- Flat profile with wallclock time:

Metric: P\_VIRTUAL\_TIME

Value: Exclusive

Units: seconds

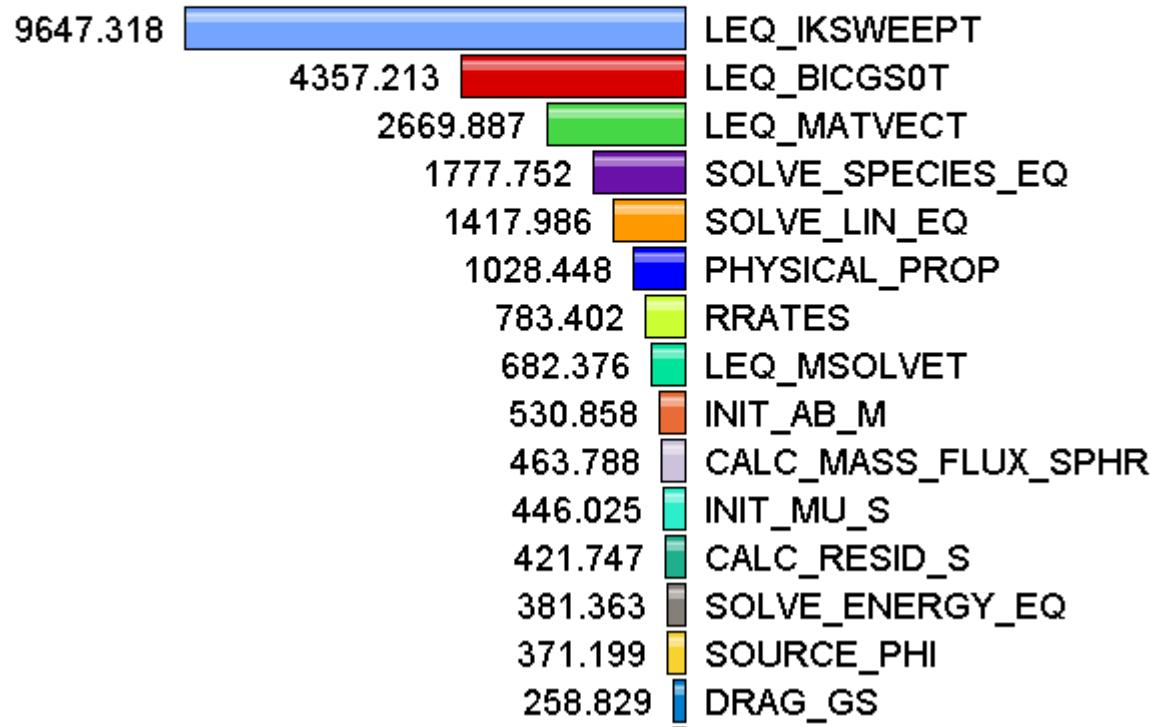

# Solution: Generating a flat profile with MPI

```
% export TAU_MAKEFILE=$TAU_ROOT/lib/Makefile.tau-mpi-pdt-pgi
% export PATH=$TAU_ROOT/bin:$PATH
OR
% source /projects/tau/tau.bashrc
% tau_f90.sh matmult.f90 -o matmult
(Or edit Makefile and change F90=tau_f90.sh)

% srun -n 4 -p specops ./matmult
% module load gcc
% pprof
% paraprof &
OR
% paraprof --pack app.ppk
Move the app.ppk file to your desktop.

% paraprof app.ppk
% paraprof &
```

# Automatic Instrumentation

- We now provide compiler wrapper scripts
  - Simply replace `ftn` with `tau_f90.sh`
  - Automatically instruments Fortran source code, links with TAU MPI Wrapper libraries.
- Use `tau_cc.sh` and `tau_cxx.sh` for C/C++

## Before

```
CXX = CC
F90 = ftn
CFLAGS =
LIBS = -lm
OBJS = f1.o f2.o f3.o ... fn.o

app: $(OBJS)
    $(CXX) $(LDFLAGS) $(OBJS) -o $@
    $(LIBS)

.cpp.o:
    $(CC) $(CFLAGS) -c $<
```

## After

```
CXX = tau_cxx.sh
F90 = tau_f90.sh
CFLAGS =
LIBS = -lm
OBJS = f1.o f2.o f3.o ... fn.o

app: $(OBJS)
    $(CXX) $(LDFLAGS) $(OBJS) -o $@
    $(LIBS)

.cpp.o:
    $(CC) $(CFLAGS) -c $<
```

## TAU\_COMPILER Commandline Options

---

- See `<taudir>/<arch>/bin/tau_compiler.sh -help`
- Compilation:

```
% ftn -c foo.f90
```

Changes to

```
% gfpars e foo.f90 $(OPT1)  
% tau_instrumentor foo.pdb foo.f90 -o foo.inst.f90 $(OPT2)  
% ftn -c foo.f90 $(OPT3)
```

- Linking:

```
% ftn foo.o bar.o -o app
```

Changes to

```
% ftn foo.o bar.o -o app $(OPT4)
```

- Where options OPT[1-4] default values may be overridden by the user:

**F90 = tau\_f90.sh**

# Compile-Time Environment Variables

- Optional parameters for TAU\_OPTIONS: [tau\_compiler.sh –help]

-optVerbose	Turn on verbose debugging messages
-optComplInst	Use compiler based instrumentation
-optNoComplInst	Do not revert to compiler instrumentation if source instrumentation fails.
-optDetectMemoryLeaks	Turn on debugging memory allocations/de-allocations to track leaks
-optTrackIO	Wrap POSIX I/O call and calculates vol/bw of I/O operations (Requires TAU to be configured with –iowrapper)
-optKeepFiles	Does not remove intermediate .pdb and .inst.* files
-optPreProcess	Preprocess Fortran sources before instrumentation
-optTauSelectFile=""	Specify selective instrumentation file for tau_instrumentor
-optTauWrapFile=""	Specify link_options.tau generated by tau_gen_wrapper
-optLinking=""	Options passed to the linker. Typically \$(TAU_MPI_FLIBS) \$(TAU_LIBS) \$(TAU_CXXLIBS)
-optCompile=""	Options passed to the compiler. Typically \$(TAU_MPI_INCLUDE) \$(TAU_INCLUDE) \$(TAU_DEFS)
-optPdtF95Opts=""	Add options for Fortran parser in PDT (f95parse/gfparse)
-optPdtF95Reset=""	Reset options for Fortran parser in PDT (f95parse/gfparse)
-optPdtCOpts=""	Options for C parser in PDT (cparse). Typically \$(TAU_MPI_INCLUDE) \$(TAU_INCLUDE) \$(TAU_DEFS)
-optPdtCxxOpts=""	Options for C++ parser in PDT (cxxparse). Typically \$(TAU_MPI_INCLUDE) \$(TAU_INCLUDE) \$(TAU_DEFS)

# Environment Variables in TAU

Environment Variable	Default	Description
TAU_TRACE	0	Setting to 1 turns on tracing
TAU_CALLPATH	0	Setting to 1 turns on callpath profiling
TAU_TRACK_MEMORY_LEAKS	0	Setting to 1 turns on leak detection (for use with tau_exec -memory)
TAU_TRACK_HEAP or TAU_TRACK_HEADROOM	0	Setting to 1 turns on tracking heap memory/headroom at routine entry & exit using context events (e.g., Heap at Entry: main=>foo=>bar)
TAU_CALLPATH_DEPTH	2	Specifies depth of callpath. Setting to 0 generates no callpath or routine information, setting to 1 generates flat profile and context events have just parent information (e.g., Heap Entry: foo)
TAU_TRACK_IO_PARAMS	0	Setting to 1 with –optTrackIO or tau_exec –io captures arguments of I/O calls
TAU_SYNCHRONIZE_CLOCKS	1	Synchronize clocks across nodes to correct timestamps in traces
TAU_COMM_MATRIX	0	Setting to 1 generates communication matrix display using context events
TAU_THROTTLE	1	Setting to 0 turns off throttling. Enabled by default to remove instrumentation in lightweight routines that are called frequently
TAU_THROTTLE_NUMCALLS	100000	Specifies the number of calls before testing for throttling
TAU_THROTTLE_PERCALL	10	Specifies value in microseconds. Throttle a routine if it is called over 100000 times and takes less than 10 usec of inclusive time per call
TAU_COMPENSATE	0	Setting to 1 enables runtime compensation of instrumentation overhead
TAU_PROFILE_FORMAT	Profile	Setting to “merged” generates a single file. “snapshot” generates xml format
TAU_METRICS <b>Paratools</b>	TIME	Setting to a comma separated list generates other metrics. (e.g., TIME:linuxtimers:PAPI_FP_OPS:PAPI_NATIVE_<event>)


# Compiling Fortran Codes with TAU

---

- If your Fortran code uses free format in .f files (fixed is default for .f), you may use:  
`% export TAU_OPTIONS='-optPdtF95Opts="-R free" -optVerbose'`
- To use the compiler based instrumentation instead of PDT (source-based):  
`% export TAU_OPTIONS='-optComInst -optVerbose'`
- If your Fortran code uses C preprocessor directives (#include, #ifdef, #endif):  
`% export TAU_OPTIONS='-optPreProcess -optVerbose -optDetectMemoryLeaks'`
- To use an instrumentation specification file:  
`% export TAU_OPTIONS='-optTauSelectFile=mycmd.tau -optVerbose -optPreProcess'`  
`% cat mycmd.tau`  
BEGIN\_INSTRUMENT\_SECTION  
memory file="foo.f90" routine="#"  
# instruments all allocate/deallocate statements in all routines in foo.f90  
loops file="\*" routine="#"  
io file="abc.f90" routine="FOO"  
END\_INSTRUMENT\_SECTION

# Usage Scenarios: Compiler-based Instrumentation

- Goal: Easily generate routine level performance data using the compiler instead of PDT for parsing the source code

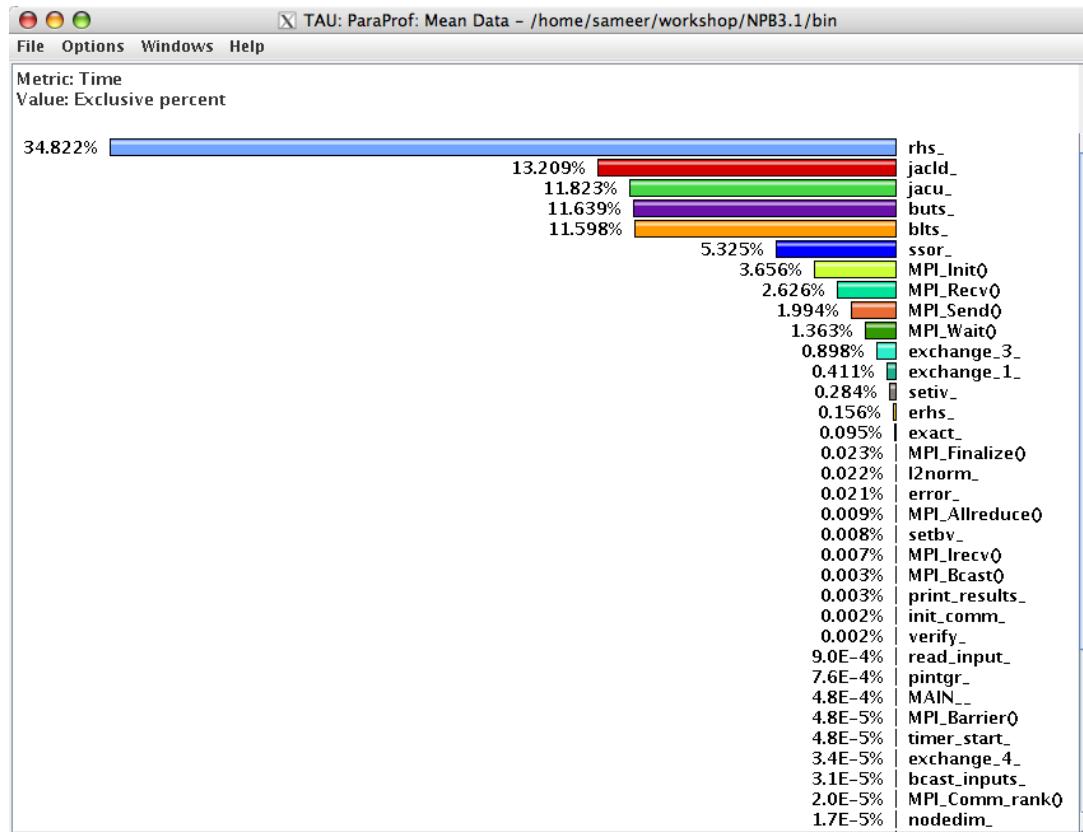

# Use Compiler-Based Instrumentation

---

```
% export TAU_MAKEFILE=$TAU_ROOT  
      /lib/Makefile.tau-mpi-pdt  
  
% export TAU_OPTIONS='-optCompInst -optVerbose'  
  
% export PATH=$TAU_ROOT/bin:$PATH  
  
% make F90=tau_f90.sh  
  
(Or edit Makefile and change F90=tau_f90.sh)  
  
% srun -n 4 -p specops ./a.out  
  
% paraprof --pack app.ppk  
  
  Move the app.ppk file to your desktop.  
  
% paraprof app.ppk
```

# Re-writing Binaries

---

- Support for both static and dynamic executables
- Specify the list of routines to instrument/exclude from instrumentation
- Specify the TAU measurement library to be injected
- Simplify the usage of TAU:
  - To instrument:
    - % tau\_run a.out –o a.inst
  - To perform measurements, execute the application:
    - % mpirun –np 4 ./a.inst
  - To analyze the data:
    - % paraprof


# tau\_run with NAS PBS

```
livetau@paratools01:~
```

```
/home/livetau% cd ~/tutorial
/home/livetau/tutorial% # Build an uninstrumented bt NAS Parallel Benchmark
/home/livetau/tutorial% make bt CLASS=W NPROCS=4
/home/livetau/tutorial% cd bin
/home/livetau/tutorial/bin% # Run the instrumented code
/home/livetau/tutorial/bin% mpirun -np 4 ./bt_W.4
/home/livetau/tutorial/bin%
/home/livetau/tutorial/bin% # Instrument the executable using TAU with DyninstAPI
/home/livetau/tutorial/bin%
/home/livetau/tutorial/bin% tau_run ./bt_W.4 -o ./bt.i
/home/livetau/tutorial/bin% rm -rf profile.* MULT*
/home/livetau/tutorial/bin% mpirun -np 4 ./bt.i
/home/livetau/tutorial/bin% paraprof
/home/livetau/tutorial/bin%
/home/livetau/tutorial/bin% # Choose a different TAU configuration
/home/livetau/tutorial/bin% ls $TAU/libTAUsh
libTAUsh-depthlimit-mpi-pdt.so*          libTAUsh-papi-pdt.so*
libTAUsh-mpi-pdt.so*                     libTAUsh-papi-pthread-pdt.so*
libTAUsh-mpi-pdt-upc.so*                  libTAUsh-param-mpi-pdt.so*
libTAUsh-mpi-python-pdt.so*                libTAUsh-pdt.so*
libTAUsh-papi-mpi-pdt.so*                 libTAUsh-pdt-trace.so*
libTAUsh-papi-mpi-pdt-upc.so*              libTAUsh-phase-papi-mpi-pdt.so*
libTAUsh-papi-mpi-pdt-upc-udp.so*         libTAUsh-pthread-pdt.so*
libTAUsh-papi-mpi-pdt-vampirtrace-trace.so* libTAUsh-python-pdt.so*
libTAUsh-papi-mpi-python-pdt.so*
/home/livetau/tutorial/bin%
/home/livetau/tutorial/bin% tau_run -XrunTAUsh-papi-mpi-pdt-vampirtrace-trace bt_W.4 -o bt.vpt
/home/livetau/tutorial/bin% setenv VT_METRICS PAPI_FP_INS:PAPI_L1_DCM
/home/livetau/tutorial/bin% mpirun -np 4 ./bt.vpt
/home/livetau/tutorial/bin% vampir bt.vpt.otf &
```

# Usage Scenarios: Instrument a Python program

- Goal: Generate a flat profile for a Python program

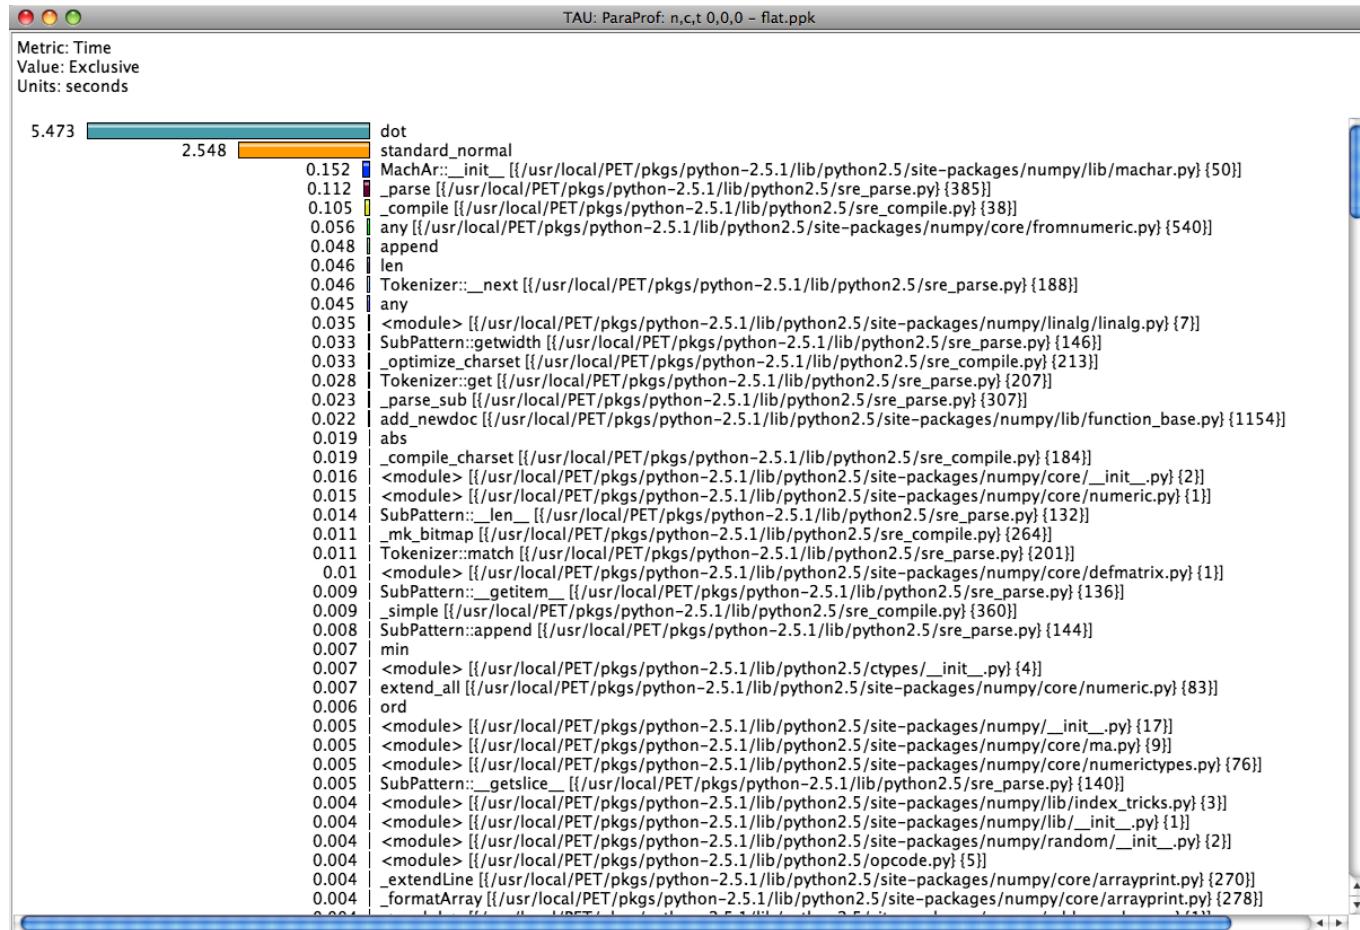

# Usage Scenarios: Instrument a Python program

---

*Original  
code:*

```
% cat foo.py
#!/usr/bin/env python
import numpy
ra=numpy.random
la=numpy.linalg

size=2000
a=ra.standard_normal((size,size))
b=ra.standard_normal((size,size))
c=la.linalg.dot(a,b)
print c
```

*Create a wrapper:*

```
% cat wrapper.py
#!/usr/bin/env python

# setenv PYTHONPATH $PET_HOME/pkgs/tau-2.17.3/ppc64/lib/bindings-gnu-python-pdt

import tau

def OurMain():
    import foo

tau.run('OurMain()')
```

# Generate a Python Profile


```
% export TAU_MAKEFILE=$TAU_ROOT
    /lib/Makefile.tau-python-pdt
% export PATH=$TAU_ROOT/bin:$PATH
% cat wrapper.py
import tau
def OurMain():
    import foo
tau.run('OurMain()')
Uninstrumented:
% ./foo.py
Instrumented:
% export PYTHONPATH= <taudir>/x86_64/<lib>/bindings-python-pdt
(same options string as TAU_MAKEFILE)
% export LD_LIBRARY_PATH=<taudir>/x86_64/lib/bindings-python-pdt:
$LD_LIBRARY_PATH
% ./wrapper.py

Wrapper invokes foo and generates performance data
% pprof/paraprof
```



# Usage Scenarios: Mixed Python+F90+C+pyMPI

- Goal: Generate multi-level instrumentation for Python+MPI+C+F90+C++ ...

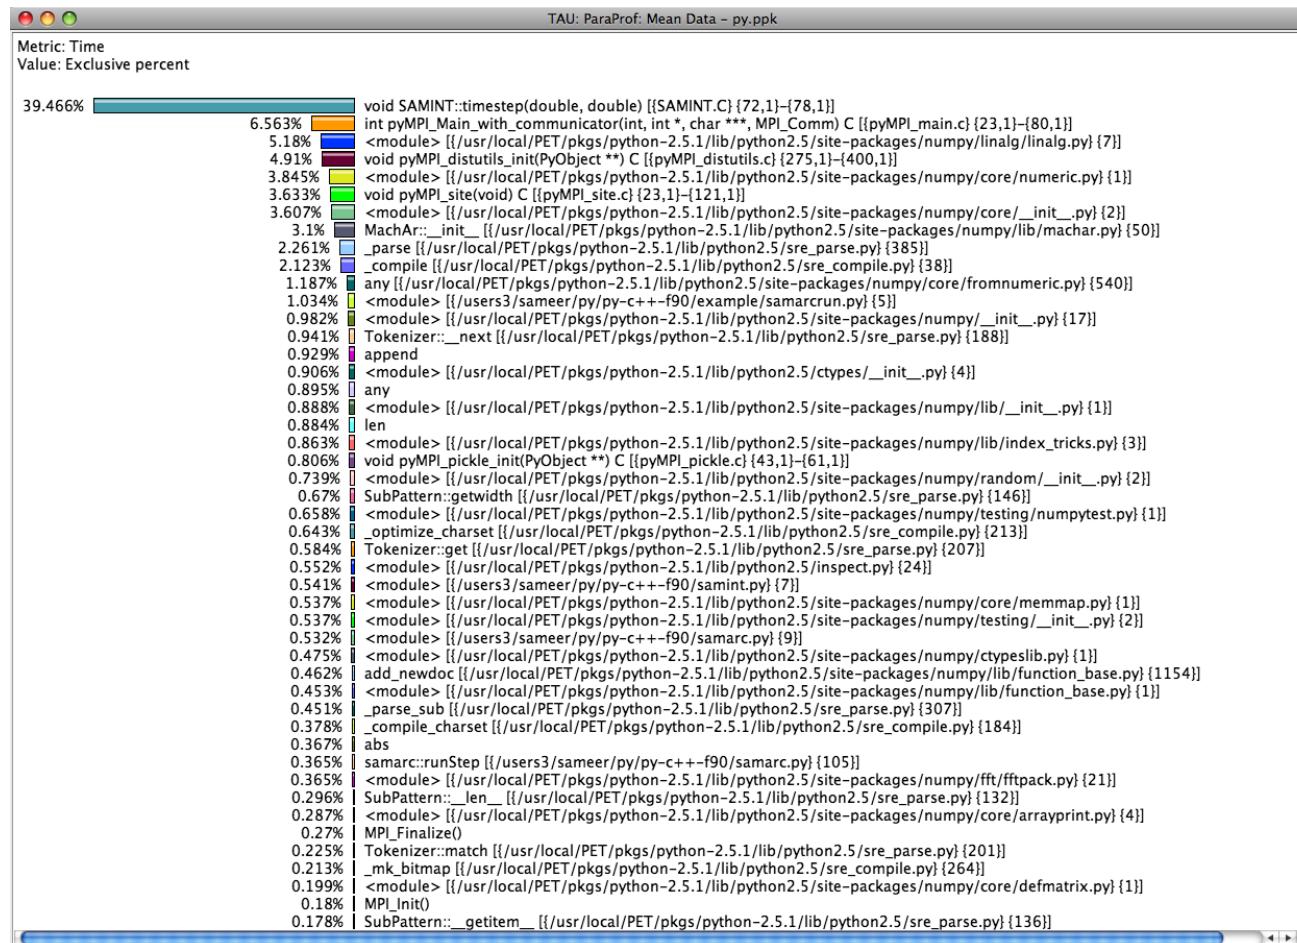

# Generate a Multi-Language Profile w/ Python

```
% export TAU_MAKEFILE=$TAU_ROOT  
          /lib/Makefile.tau-python-mpi-pdt  
  
% export PATH=$TAU_ROOT/bin:$PATH  
  
% export TAU_OPTIONS='-optShared -optVerbose...'  
(Python needs shared object based TAU library)  
  
% make F90=tau_f90.sh CXX=tau_cxx.sh CC=tau_cc.sh  (build libs, pyMPI w/TAU)  
  
% cat wrapper.py  
import tau  
  
def OurMain():  
    import App  
  
    tau.run('OurMain()')  
  
Uninstrumented:  
  
% mpirun -np 4 pyMPI ./App.py  
  
Instrumented:  
  
% export PYTHONPATH= <taudir>/x86_64/<lib>/bindings-python-mpi-pdt  
(same options string as TAU_MAKEFILE)  
  
% export LD_LIBRARY_PATH=<taudir>/x86_64/lib/bindings-python-mpi-pdt:  
$LD_LIBRARY_PATH  
  
% mpirun -np 4 <pkgs>/pyMPI-2.5b0-TAU/bin/pyMPI  
./wrapper.py          (Instrumented pyMPI with wrapper.py)
```

## Library interposition/wrapping: `tau_exec`, `tau_wrap`

---

- TAU provides a wealth of options to measure the performance of an application
- Need to simplify TAU usage to easily evaluate performance properties, including I/O, memory, and communication
- Designed a new tool (*tau\_exec*) that leverages runtime instrumentation by pre-loading measurement libraries
- Works on dynamic executables (default under Linux)
- Substitutes I/O, MPI, and memory allocation/deallocation routines with instrumented calls
  - Interval events (e.g., time spent in `write()`)
  - Atomic events (e.g., how much memory was allocated)
- Measure I/O and memory usage

# TAU Execution Command (tau\_exec)

---

- Uninstrumented execution
  - % mpirun –np 256 ./a.out
- Track MPI performance
  - % mpirun –np 256 **tau\_exec** ./a.out
- Track I/O and MPI performance (MPI enabled by default)
  - % mpirun –np 256 **tau\_exec –io** ./a.out
- Track memory operations
  - % setenv TAU\_TRACK\_MEMORY\_LEAKS 1
  - % mpirun –np 256 **tau\_exec –memory** ./a.out
- Track I/O performance and memory operations
  - % mpirun –np 256 **tau\_exec –io –memory** ./a.out
- **Track GPGPU operations**
  - % mpirun –np 256 **tau\_exec –cuda** ./a.out

# Library wrapping: tau\_gen\_wrapper

---

- How to instrument an external library without source?
  - Source may not be available
  - Library may be too cumbersome to build (with instrumentation)
- Build a library wrapper tools
  - Used PDT to parse header files
  - Generate new header files with instrumentation files
  - Three methods to instrument: runtime preloading, linking, redirecting headers
- Application is instrumented
- Add the `--optTauWrapFile=<wrapperdir>/link_options.tau` file to `TAU_OPTIONS` env var while compiling with `tau_cc.sh`, etc.
- Wrapped library
  - Redirects references at routine callsite to a wrapper call
  - Wrapper internally calls the original

~~Para~~Tau ~~Tools~~ has TAU measurement code

---

# HDF5 Library Wrapping

```
[sameer@zorak]$ tau_gen_wrapper hdf5.h /usr/lib/libhdf5.a -f select.tau
```

Usage : tau\_gen\_wrapper <header> <library> [-r|-d|-w (default)] [-g groupname] [-i headerfile] [-c|-c++|-fortran] [-f <instr\_req\_file> ]

- instruments using runtime preloading (-r), or -Wl,-wrap linker (-w), redirection of header file to redefine the wrapped routine (-d)
- instrumentation specification file (select.tau)
- group (hdf5)
- tau\_exec loads libhdf5\_wrap.so shared library using –loadlib=<libwrap\_pkg.so>
- creates the wrapper/ directory with -opt

NODE 0;CONTEXT 0;THREAD 0:


%Time	Exclusive msec	Inclusive total msec	#Call	#Subrs	Inclusive Name
					usec/call
100.0	0.057	1	1	13	1236 .TAU Application
70.8	0.875	0.875	1	0	875 hid_t H5Fcreate()
9.7	0.12	0.12	1	0	120 herr_t H5Fcclose()
6.0	0.074	0.074	1	0	74 hid_t H5Dcreate()
3.1	0.038	0.038	1	0	38 herr_t H5Dwrite()
2.6	0.032	0.032	1	0	32 herr_t H5Dclose()
2.1	0.026	0.026	1	0	26 herr_t H5check_version()
0.6	0.008	0.008	1	0	8 hid_t H5Screate_simple()
0.2	0.002	0.002	1	0	2 herr_t H5Tset_order()
0.2	0.002	0.002	1	0	2 hid_t H5Tcopy()
0.1	0.001	0.001	1	0	1 herr_t H5Sclose()
0.1	0.001	0.001	2	0	0 herr_t H5open()
0.0	0	0	1	0	0 herr_t H5Tclose()

# Profiling GPGPU Executions


---

- GPGPU compilers (e.g., CAPS hmpp and PGI) can now automatically generate GPGPU code using manual annotation of loop-level constructs and routines (hmpp)
- The loops (and routines for HMPP) are transferred automatically to the GPGPU
- TAU intercepts the runtime library routines and examines the arguments
- Shows events as seen from the host
- Profiles and traces GPGPU execution

# TAUcuda Architecture

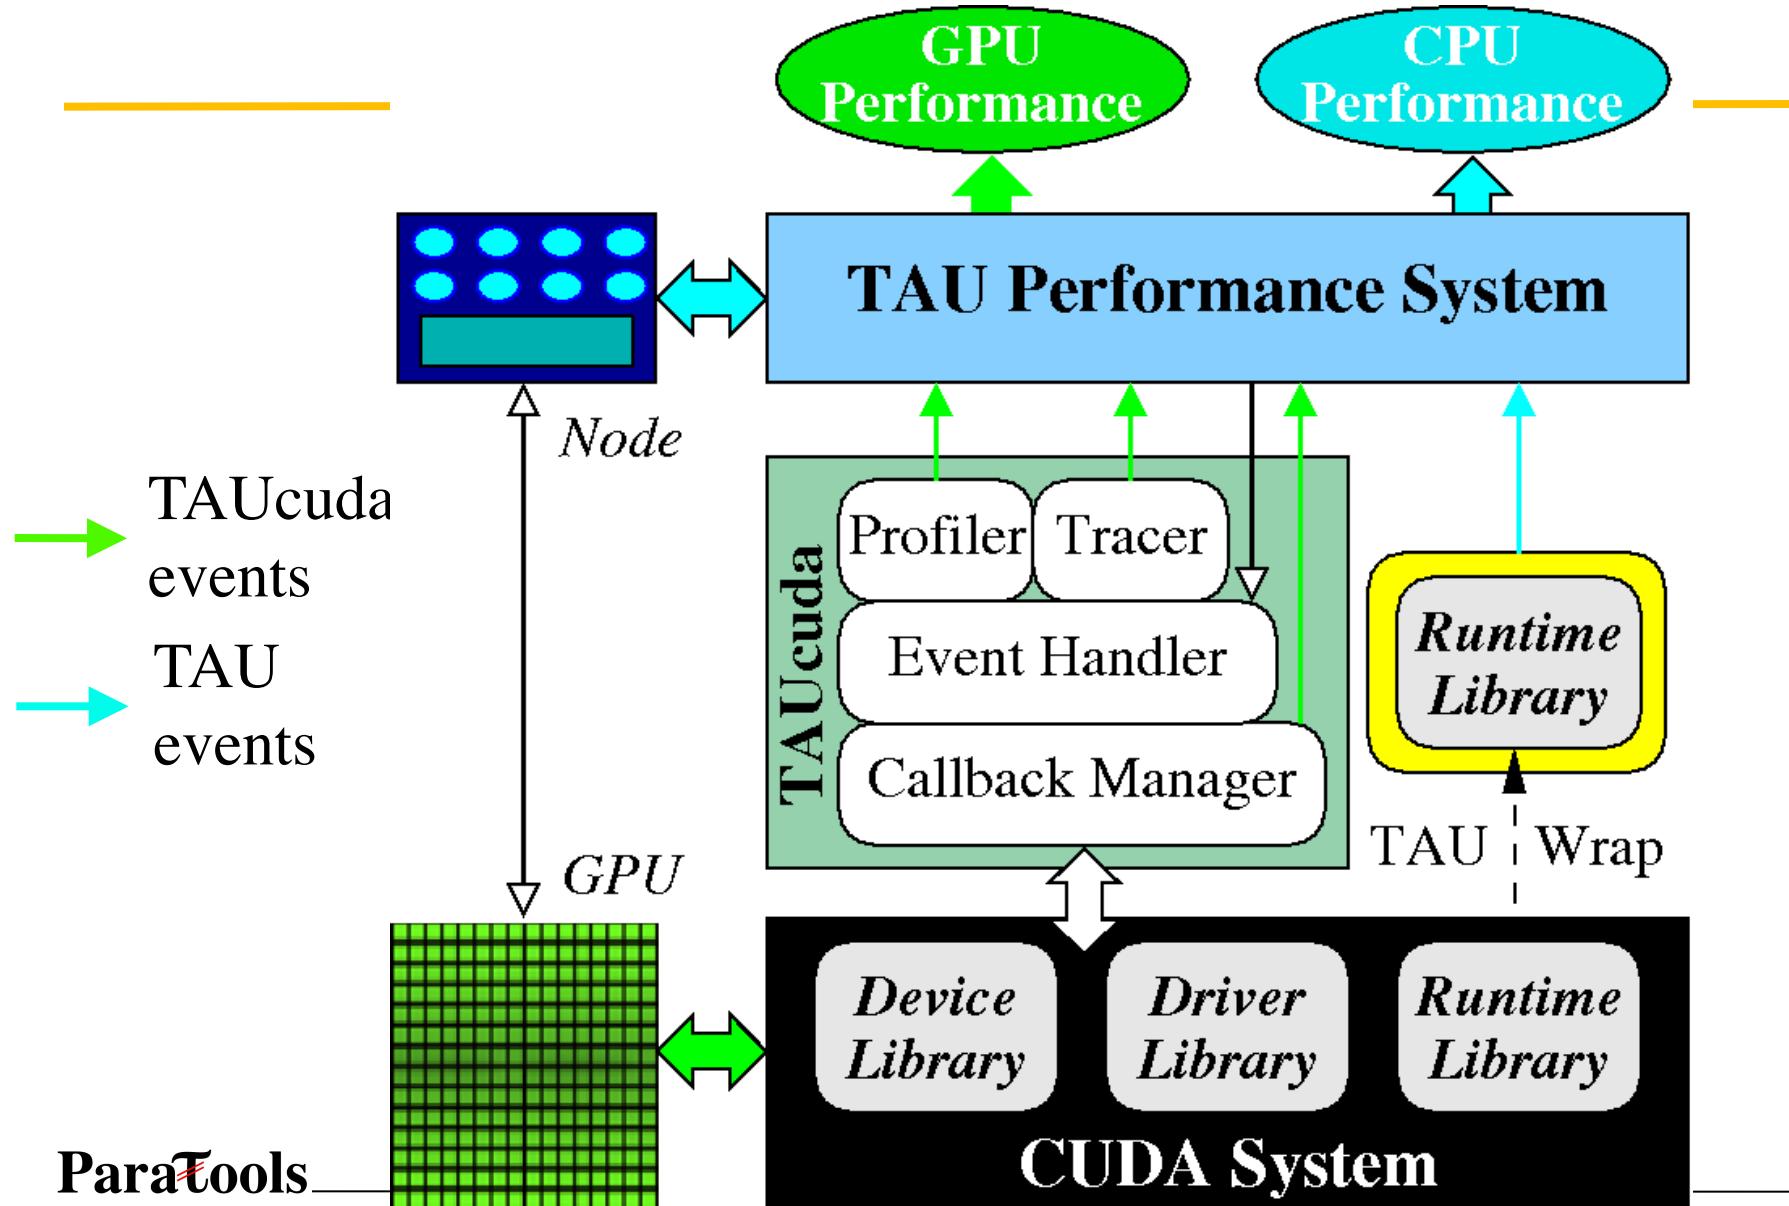


# TAUcuda Instrumentation

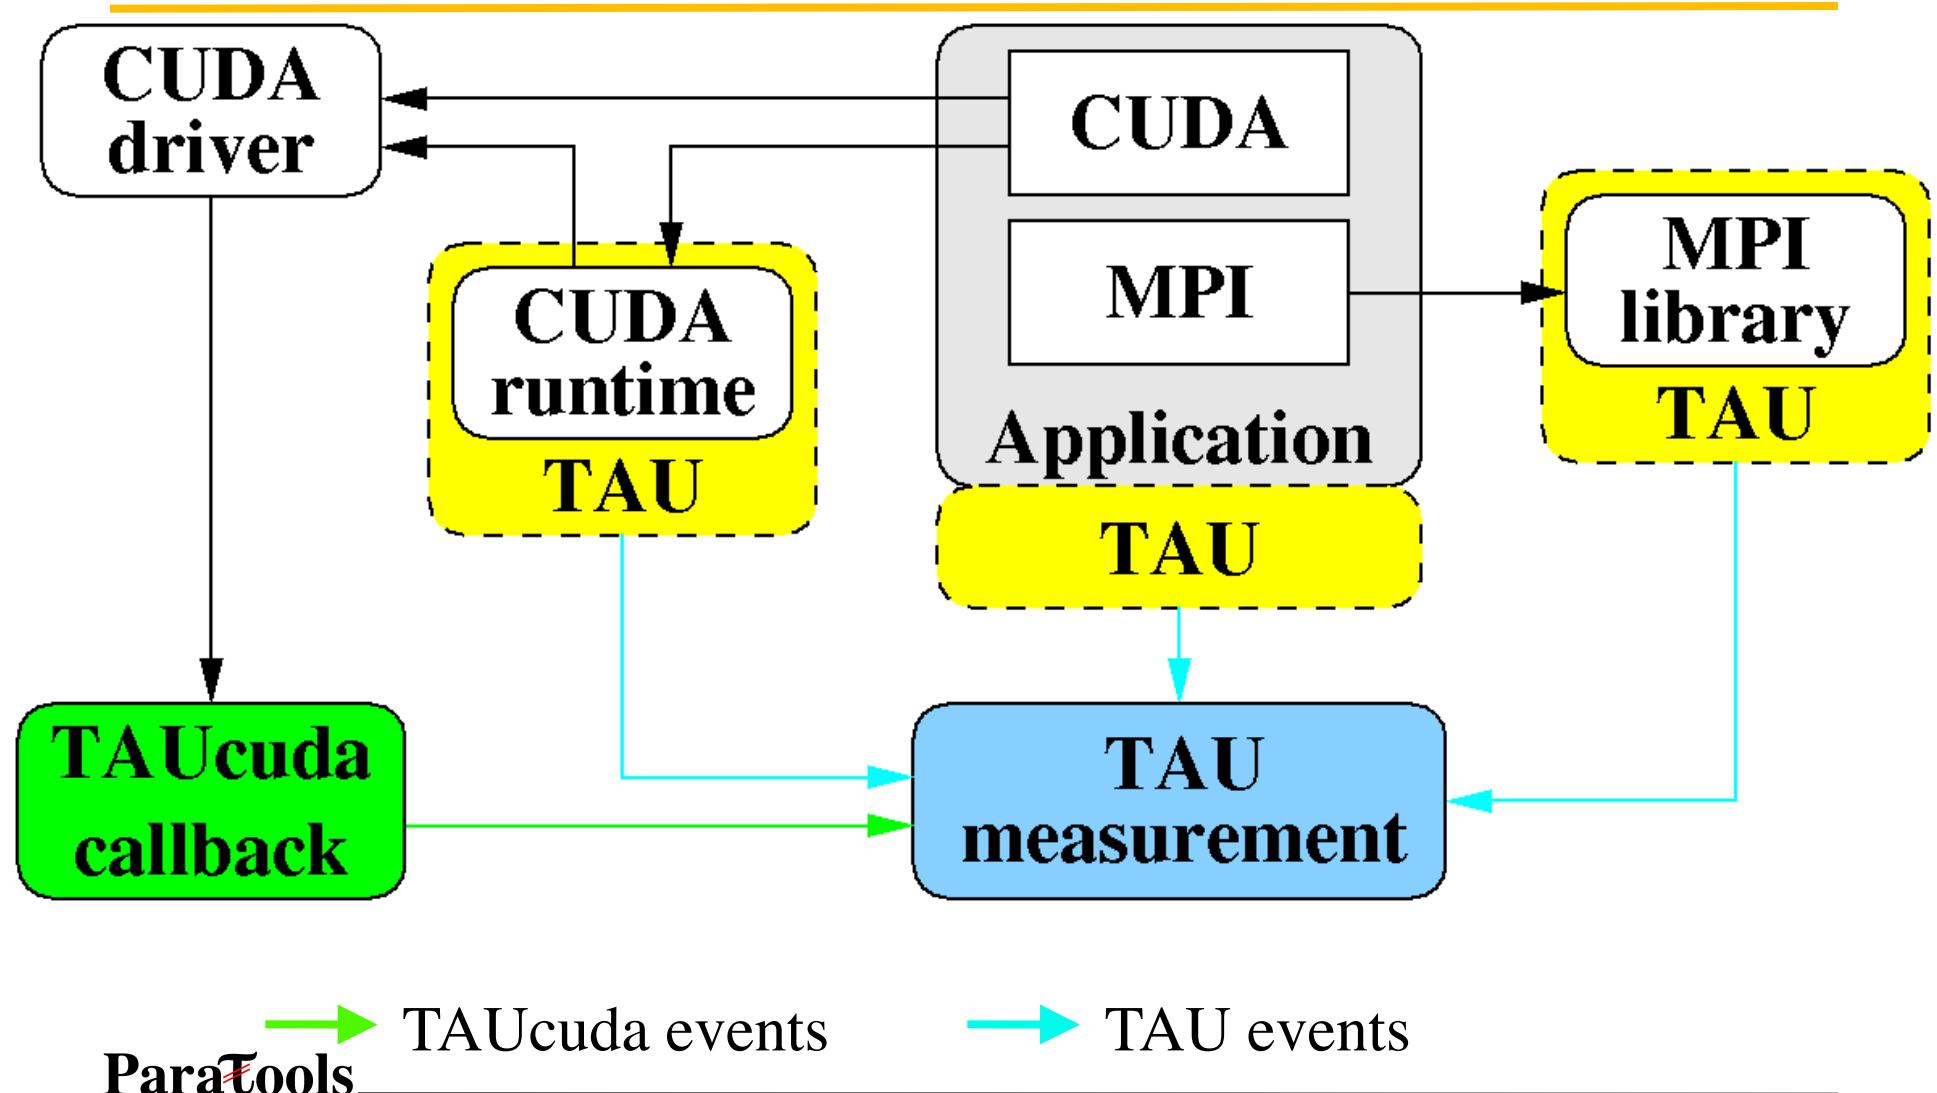


ParaTools

# CUDA Linpack Trace

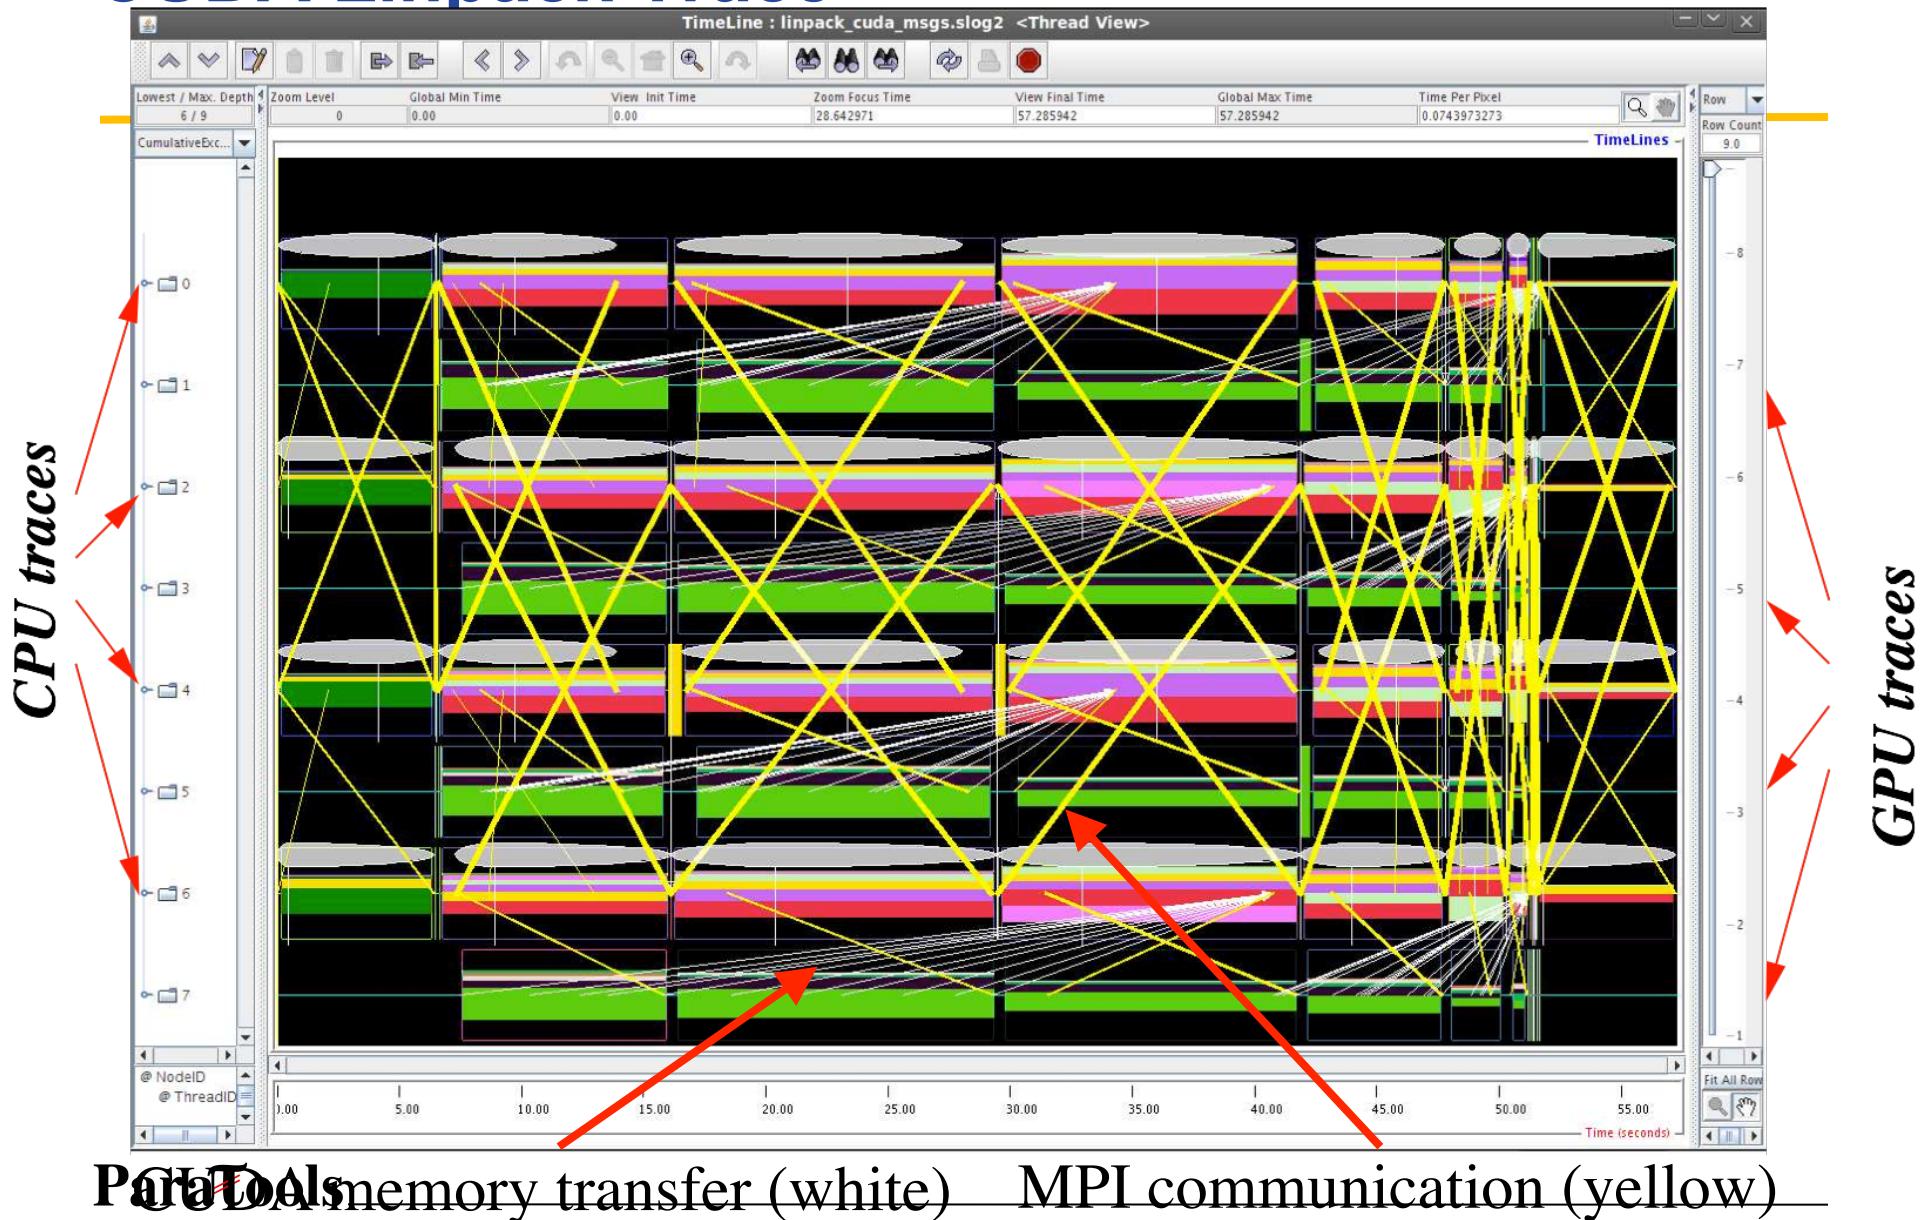


# SHOC Stencil2D (512 iterations, 4 CPUxGPU)

- Scalable Heterogeneous Computing benchmark suite

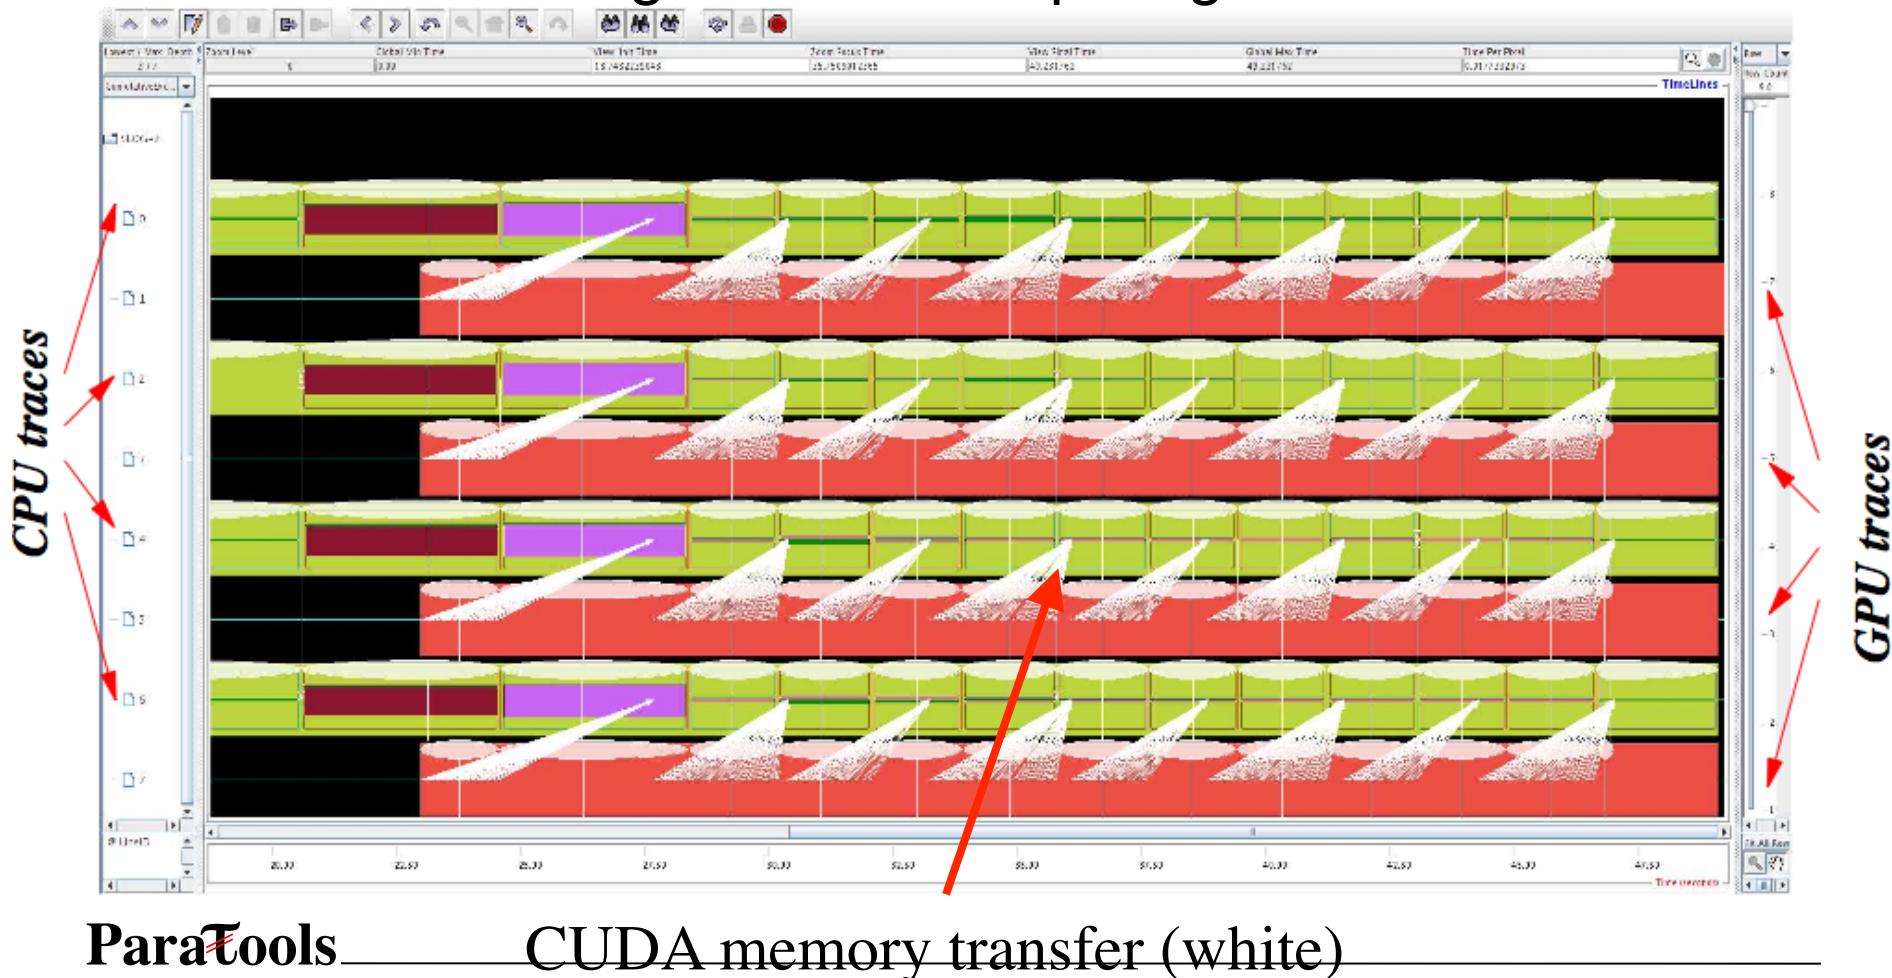


# Scaling NAMD with CUDA (Jumpshot with TAU)

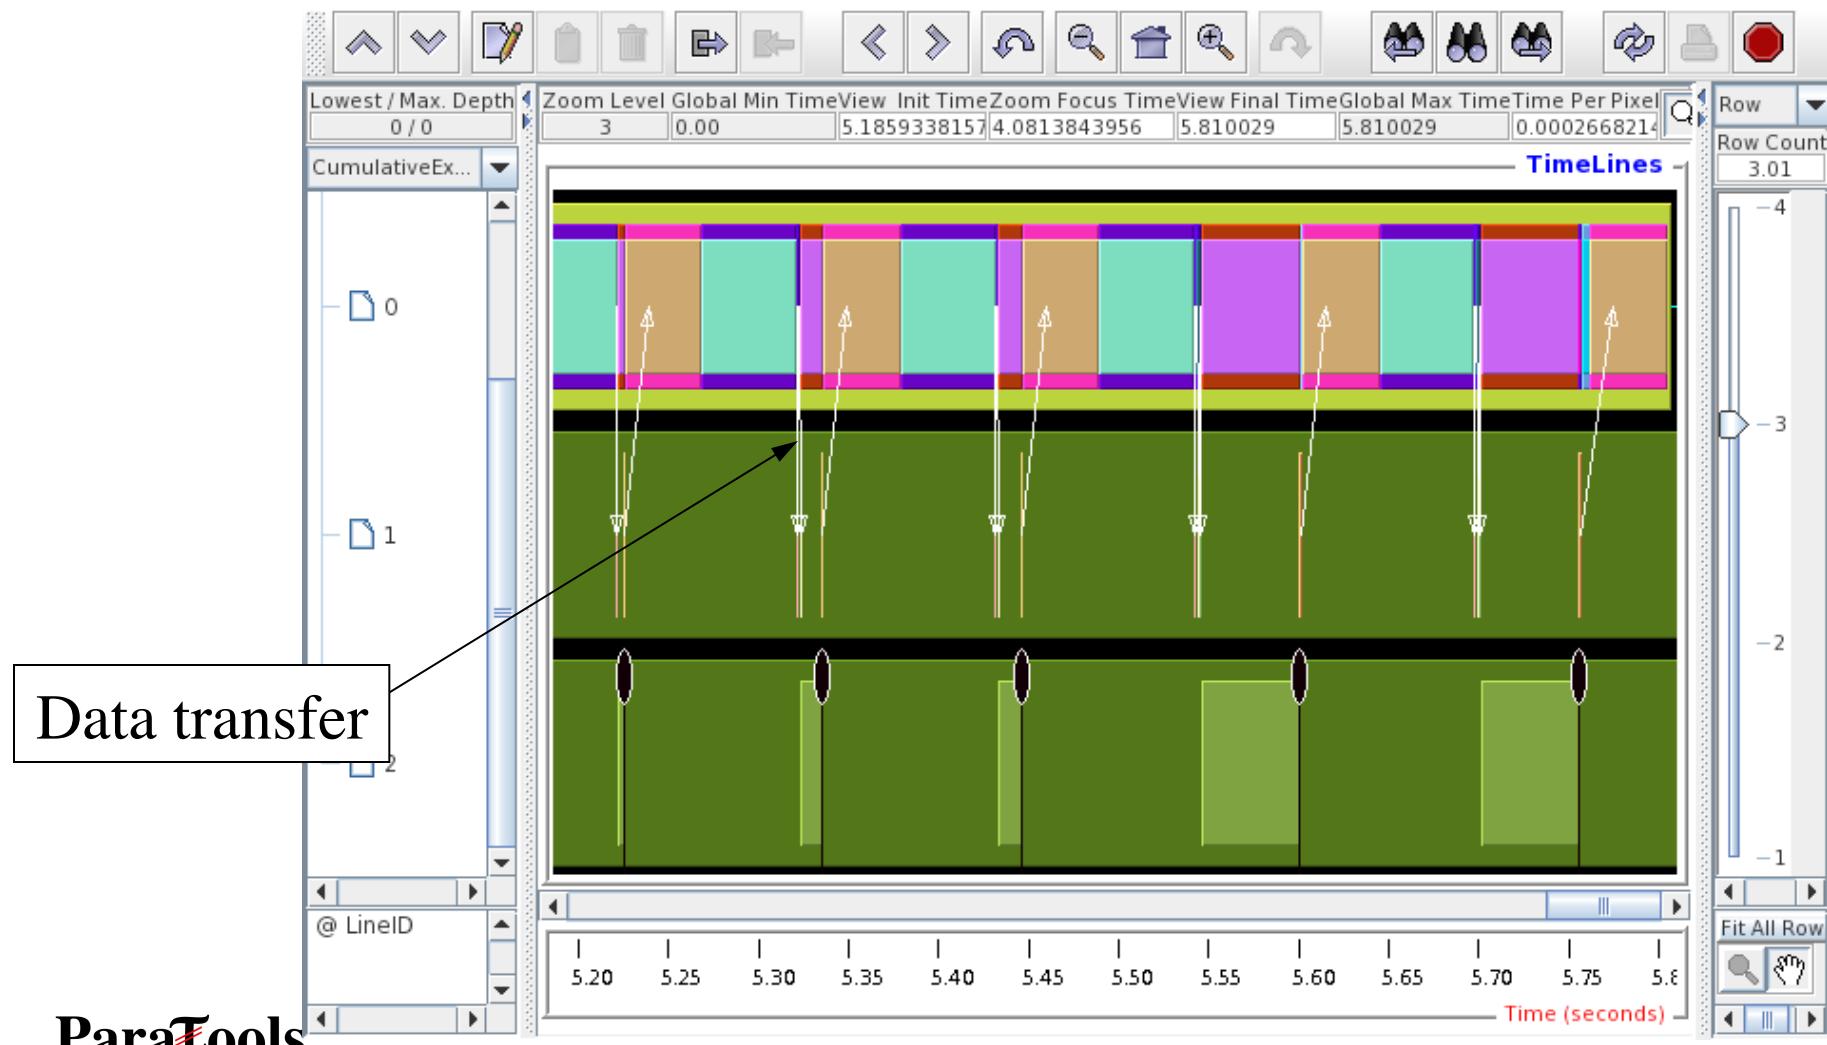


ParaTools

# Measuring Performance of PGI GPGPU Accelerated Code

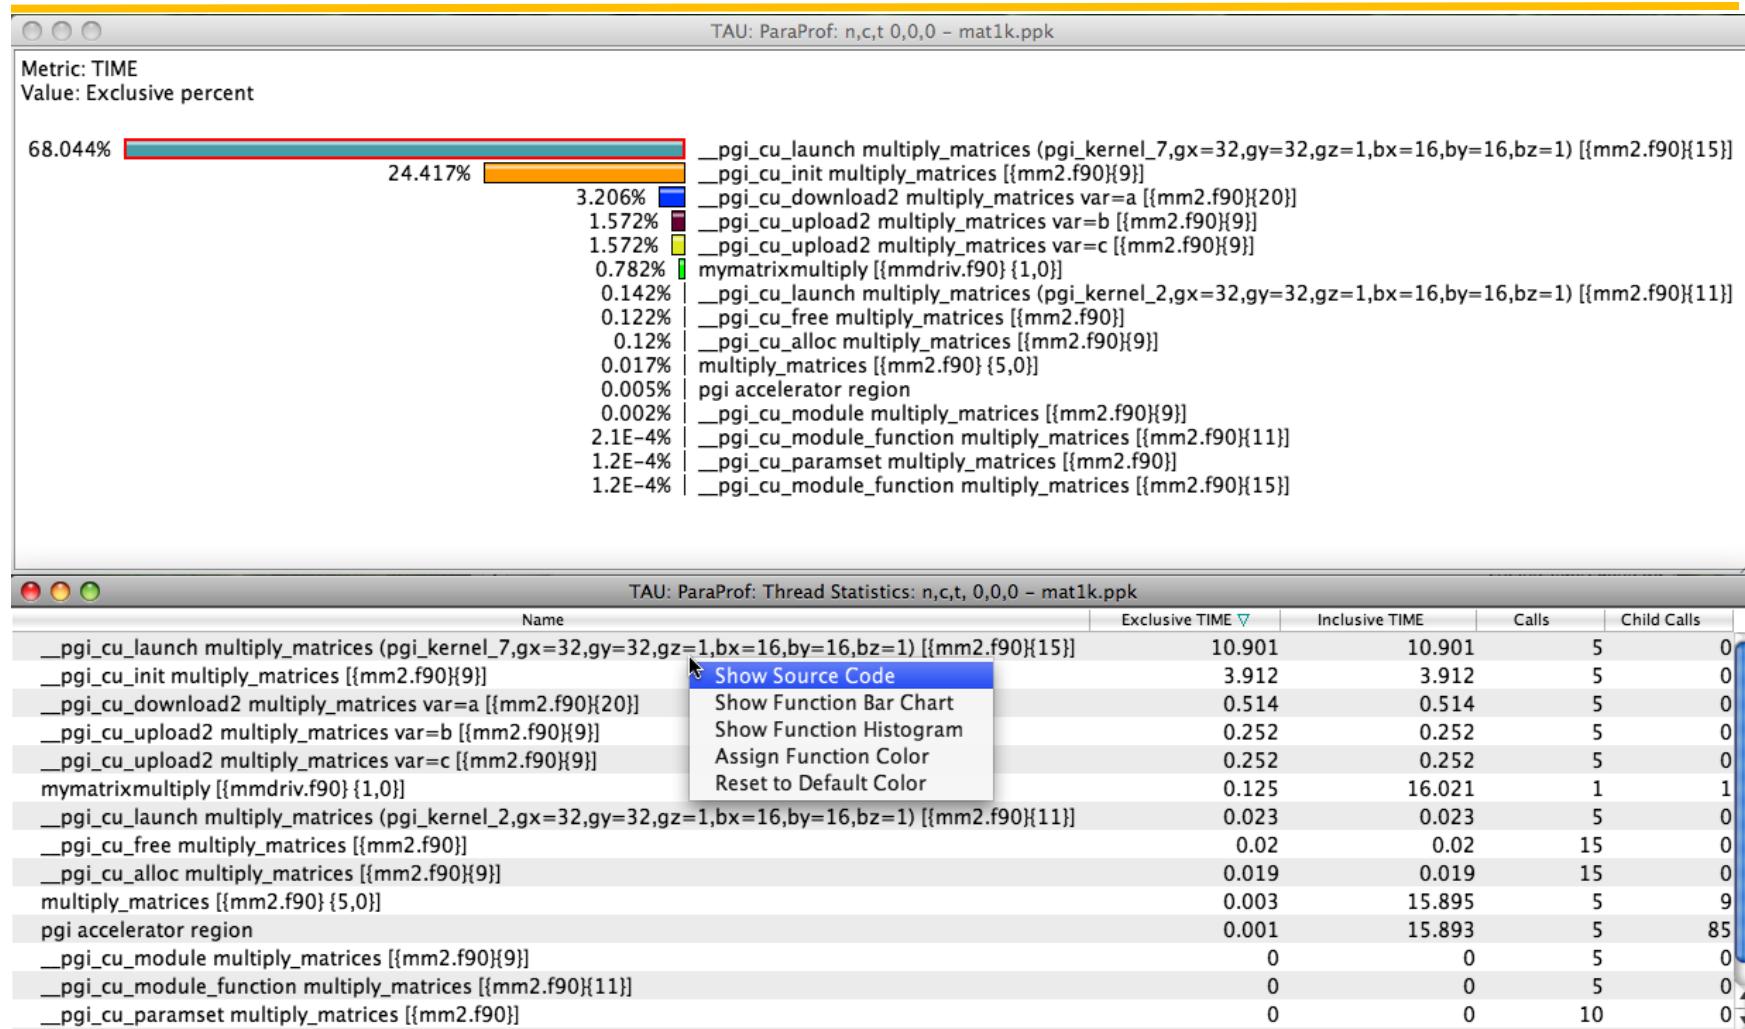

# Scaling NAMD with CUDA (Jumpshot with TAU)

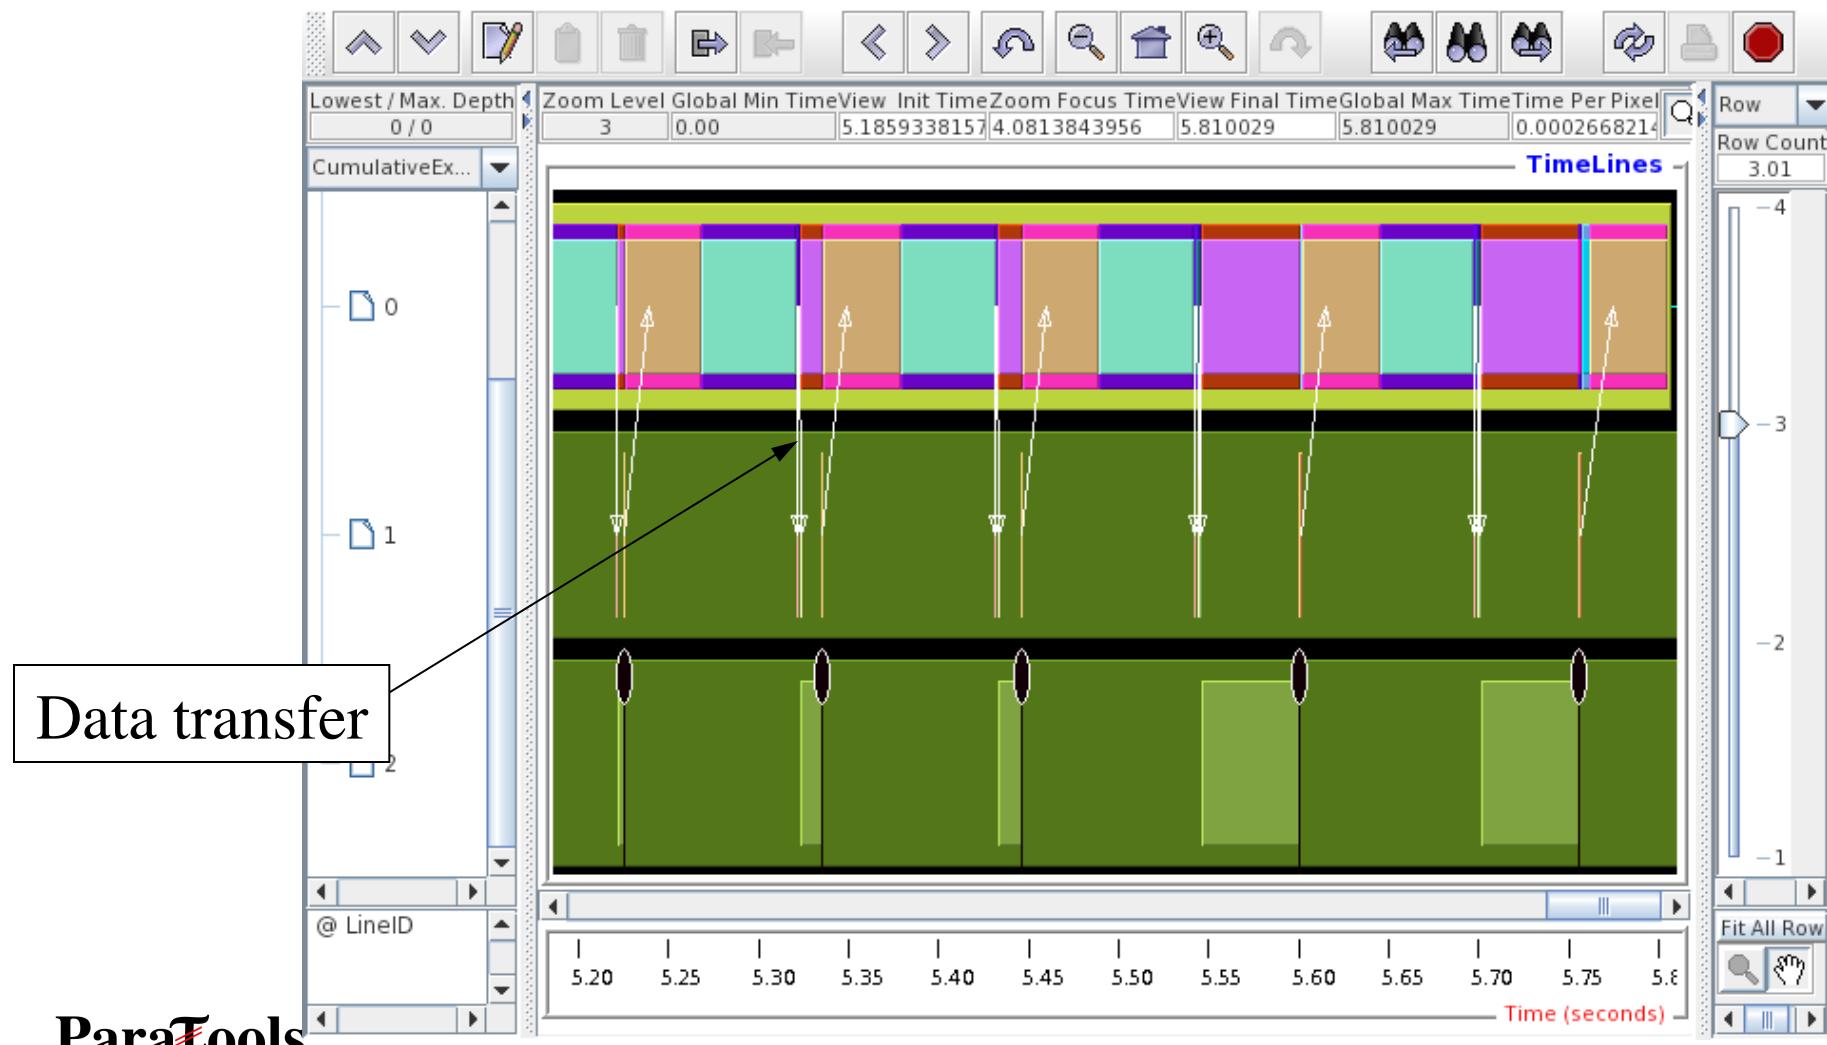

# Using TAU with Java Applications

**Step I: Sun JDK 1.6+ [download from [www.java.com](http://www.java.com)]**

**Step II: Configure TAU with JDK (v 1.6 or better)**

```
% configure -jdk=/usr/jdk1.6
```

```
% make clean; make install
```

**Builds <taudir>/<arch>/lib/libTAU.so**

**For Java (without instrumentation):**

```
% java application
```


**With instrumentation:**

```
% tau_java application
```

```
% tau_java -tau:agentlib=<different_libTAU.so> -tau:include=<item>
    -tau:exclude=<item> application
```


**Excludes where item=\*.<init>;Foobar.method;sun.\*classes**

# TAU Profiling of Java Application (SciVis)

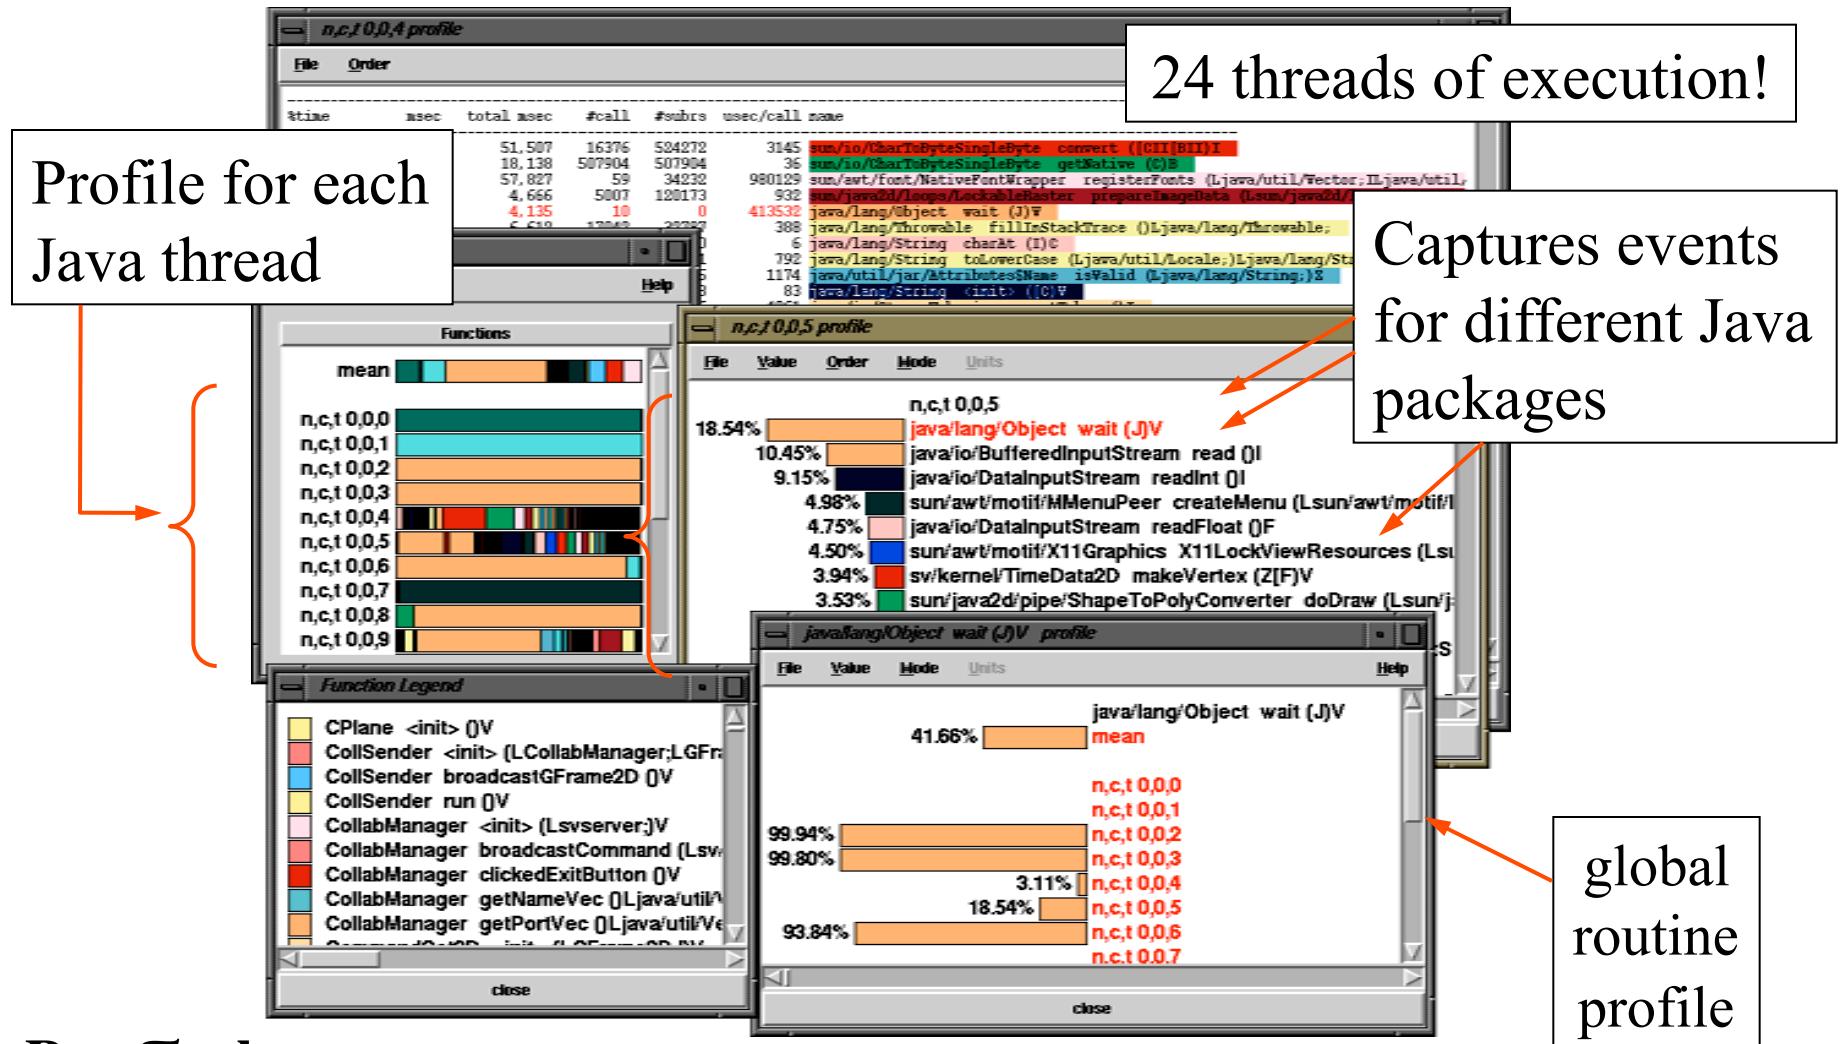

---

# Custom profiling

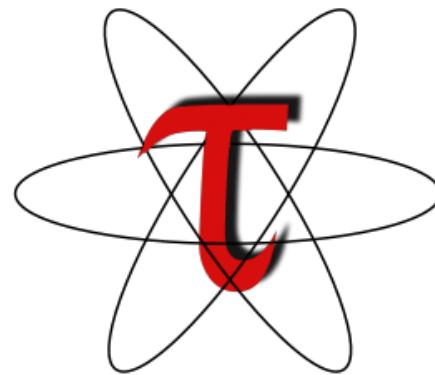

# Selective Instrumentation File

---

- Specify a list of routines to exclude or include (case sensitive)
- # is a wildcard in a routine name. It cannot appear in the first column.

```
BEGIN_EXCLUDE_LIST
Foo
Bar
D#EMM
END_EXCLUDE_LIST
```

- Specify a list of routines to include for instrumentation

```
BEGIN_INCLUDE_LIST
int main(int, char **)
F1
F3
END_INCLUDE_LIST
```

- Specify either an include list or an exclude list!

# Selective Instrumentation File

---

- Optionally specify a list of files to exclude or include (case sensitive)
- \* and ? may be used as wildcard characters in a file name

```
BEGIN_FILE_EXCLUDE_LIST  
f*.f90  
Foo?.cpp  
END_FILE_EXCLUDE_LIST
```

- Specify a list of routines to include for instrumentation

```
BEGIN_FILE_INCLUDE_LIST  
main.cpp  
foo.f90  
END_FILE_INCLUDE_LIST
```

# Selective Instrumentation File

---

- User instrumentation commands are placed in INSTRUMENT section
- ? and \* used as wildcard characters for file name, # for routine name
- \ as escape character for quotes
- Routine entry/exit, arbitrary code insertion
- Outer-loop level instrumentation

```
BEGIN_INSTRUMENT_SECTION
loops file="foo.f90" routine="matrix#"
memory file="foo.f90" routine="#"
io routine="matrix#"
[static/dynamic] phase routine="MULTIPLY"
dynamic [phase/timer] name="foo" file="foo.cpp" line=22 to line=35
file="foo.f90" line = 123 code = " print *, \" Inside foo\""
exit routine = "int foo()" code = "cout <<\"Exiting foo\"<<endl;"
END_INSTRUMENT_SECTION
```

# Instrumentation Specification

```
% tau_instrumentor
Usage : tau_instrumentor < pdbfile > < sourcefile > [ -o < outputfile > ] [ -noinline ]
[ -g groupname ] [ -i headerfile ] [ -c | -c++ | -fortran ] [ -f < instr_req_file > ]
For selective instrumentation, use -f option
% tau_instrumentor foo.pdb foo.cpp -o foo.inst.cpp -f selective.dat
% cat selective.dat
# Selective instrumentation: Specify an exclude/include list of routines/files.
BEGIN_EXCLUDE_LIST
void quicksort(int *, int, int)
void sort_5elements(int *)
void interchange(int *, int *)
END_EXCLUDE_LIST

BEGIN_FILE_INCLUDE_LIST
Main.cpp
Foo?.c
*.C
END_FILE_INCLUDE_LIST
# Instruments routines in Main.cpp, Foo?.c and *.C files only
# Use BEGIN_[FILE]_INCLUDE_LIST with END_[FILE]_INCLUDE_LIST
```

# Usage Scenarios: Loop Level Instrumentation


---

- Goal: What loops account for the most time? How much?
- Flat profile with wallclock time with loop instrumentation:

Metric: GET\_TIME\_OF\_DAY

Value: Exclusive

Units: microseconds

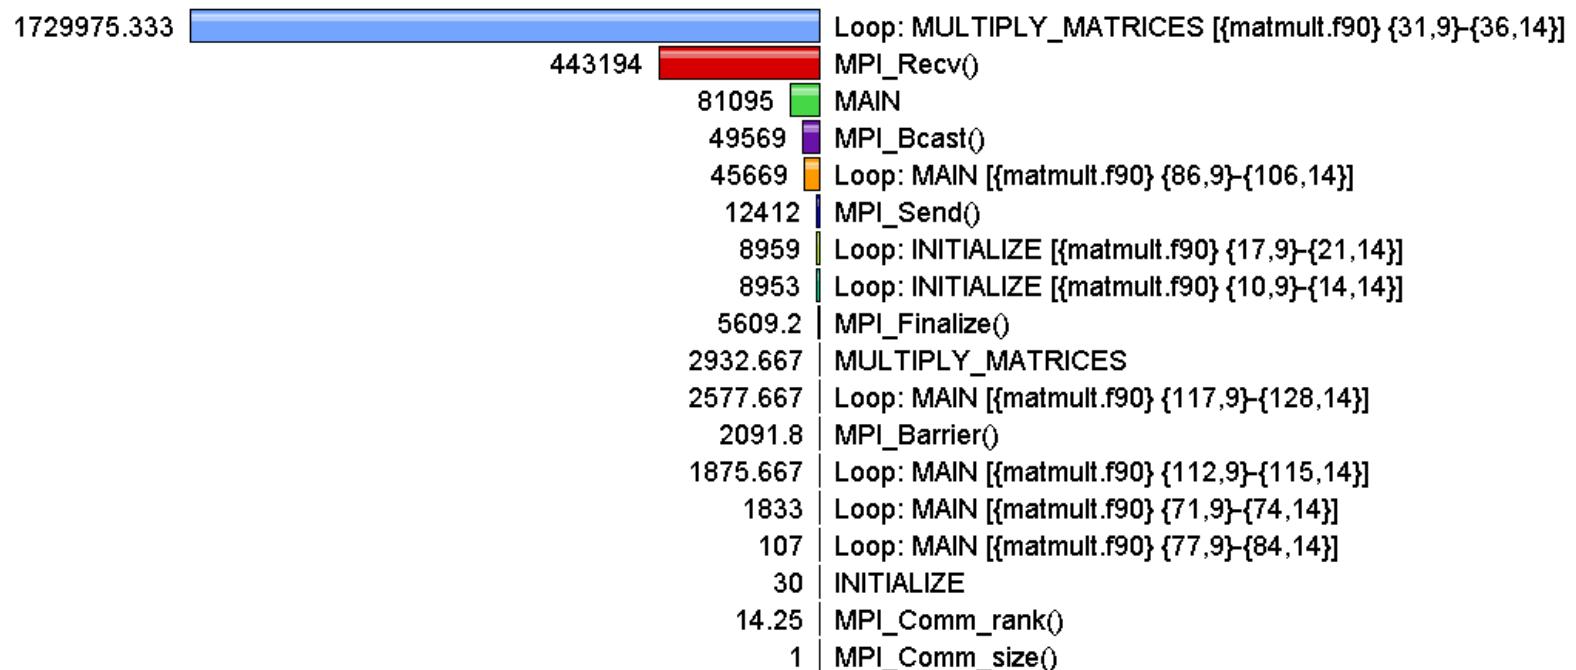

Par

# Solution: Generating a loop level profile

```
% export TAU_MAKEFILE=$TAU_ROOT/lib/Makefile.tau-mpi-pdt-pgi
% export TAU_OPTIONS='-optTauSelectFile=select.tau -optVerbose'
% cat select.tau
BEGIN_INSTRUMENT_SECTION
loops routine="#"
END_INSTRUMENT_SECTION

% export PATH=$TAU_ROOT/bin:$PATH
% make F90=tau_f90.sh
(Or edit Makefile and change F90=tau_f90.sh)
% srun -n 4 -p specops ./a.out
% paraprof --pack app.ppk
  Move the app.ppk file to your desktop.

% paraprof app.ppk
```

# ParaProf's Source Browser: Loop Level Instrumentation

The image displays three windows from the ParaProf tool interface, illustrating loop-level instrumentation:

- TAU: ParaProf: Function Data Window: s3d\_callpath\_papi.ppk** (Top Left):
 

Name: Loop: TRANSPORT\_M::COMPUTESPECIESDIFFFLUX [{mixavg\_transport\_m.pp.f90} (630,5)-(656,19)]  
 Metric Name: PAPI\_FP\_INS / GET\_TIME\_OF\_DAY  
 Value: Exclusive  
 Units: Derived metric shown in microseconds format

	std. dev.
114.979	1.088
117.62	mean
115.134	n,ct 0,0,0
114.709	n,ct 1,0,0
114.615	n,ct 2,0,0
113.547	n,ct 3,0,0
114.581	n,ct 4,0,0
114.837	n,ct 5,0,0
114.789	n,ct 6,0,0
114.789	n,ct 7,0,0
- TAU: ParaProf: Function Data Window: s3d\_callpath\_papi.ppk** (Middle Left):
 

Name: Loop: TRANSPORT\_M::COMPUTESPECIESDIFFFLUX [{mixavg\_transport\_m.pp.f90} (630,5)-(656,19)]  
 Metric Name: GET\_TIME\_OF\_DAY  
 Value: Exclusive percent

	std. dev.
12.206%	0.91%
11.931%	mean
12.19%	n,ct 0,0,0
12.248%	n,ct 1,0,0
12.258%	n,ct 2,0,0
12.335%	n,ct 3,0,0
12.241%	n,ct 4,0,0
12.221%	n,ct 5,0,0
12.226%	n,ct 6,0,0
12.226%	n,ct 7,0,0
- TAU: ParaProf: Source Browser: /mnt/epsilon/Users/sameer/rs/taudata/s3d/harness/flat/papi8** (Right):
 

```

grad_mixMW(:,:,m) = grad_mixMW(:,:,m)*avmolwt(:,:)
end do


! compute grad_P
if (baro_switch) then
  allocate(grad_P(nx,ny,nz,3))
  grad_P = 0.0
  if (vary_in_x == 1) then
    call derivative_x( nx,ny,nz, Press, grad_P(:,:,:1), scale_1x, 1 )
  endif
  if (vary_in_y == 1) then
    call derivative_y( nx,ny,nz, Press, grad_P(:,:,:2), scale_1y, 1 )
  endif
  if (vary_in_z == 1) then
    call derivative_z( nx,ny,nz, Press, grad_P(:,:,:3), scale_1z, 1 )
  endif
endif

! Changed by Ramanan - 01/24/05
! Ds_mixavg is now \rho*D
!
!grad_P/press and avmolwt*grad_T/Temp can be optimized by division before the loop.
! compute diffusive flux for species n in direction m.
diffFlux(:,:,:n_spec,:) = 0.0
DIRECTION: do m=1,3
  SPECIES: do n=1,n_spec-1
    if (baro_switch) then
      ! driving force includes gradient in mole fraction and baro-diffusion:
      diffFlux(:,:,:n,m) = - Ds_mixavg(:,:,:n) * ( grad_Ys(:,:,:n,m) &
        + Ys(:,:,:n) * ( grad_mixMW(:,:,m) &
        + (1 - molwt(n)*avmolwt) * grad_P(:,:,m)/Press ))
    else
      ! driving force is just the gradient in mole fraction:
      diffFlux(:,:,:n,m) = - Ds_mixavg(:,:,:n) * ( grad_Ys(:,:,:n,m) &
        + Ys(:,:,:n) * grad_mixMW(:,:,m) )
    endif
    !
    ! Add thermal diffusion:
    if (thermdiff_switch) then
      diffFlux(:,:,:n,m) = diffFlux(:,:,:n,m) &
        - Ds_mixavg(:,:,:n) * Rs_therm_diff(:,:,:n) * molwt(n) &
        * avmolwt * grad_T(:,:,m) / Temp
    endif
    !
    ! compute contribution to nth species diffusive flux
    ! this will ensure that the sum of the diffusive fluxes is zero.
    diffFlux(:,:,:n_spec,m) = diffFlux(:,:,:n_spec,m) - diffFlux(:,:,:n,m)
  enddo SPECIES
  enddo DIRECTION
  if (baro_switch) then
    deallocate(grad_P)
  endif
  return
end subroutine computeSpeciesDiffFlux
!$=====
subroutine computeStressTensor( grad_u)

```

---

# Techniques for manual instrumentation of individual routines

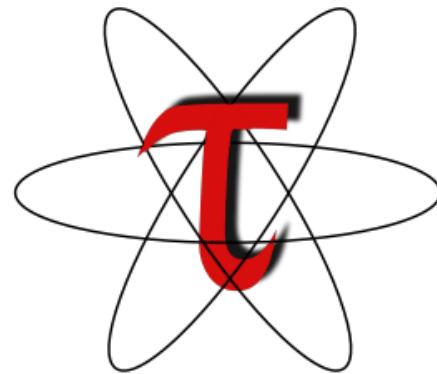


# Instrumenting a C code

```
#include <TAU.h>
int foo(int x) {
    TAU_START("foo");
    for (i = 0; i < x; i++) { // do work
    }
    TAU_STOP("foo");
}


int main(int argc, char **argv) {
    TAU_INIT(&argc, &argv);
    TAU_START("main");
    TAU_PROFILE_SET_NODE(rank);
    ...
    TAU_STOP("main");
}
% gcc -I<taudir>/include foo.c -o foo -L<taudir>/<arch>/lib -lTAU
% ./a.out
% pprof; paraprof
NOTE: Replace TAU_START("foo") with call TAU_START('foo')
      in Fortran. See <taudir>/include/TAU.h for full API.
```

---

# Generating event traces

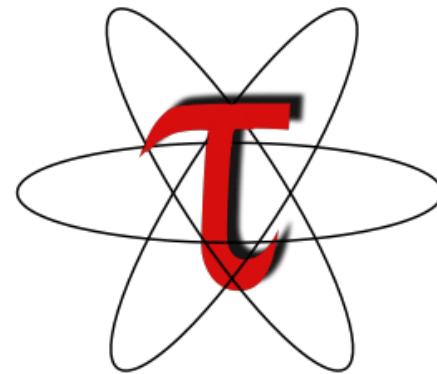

# Tracing Analysis and Visualization

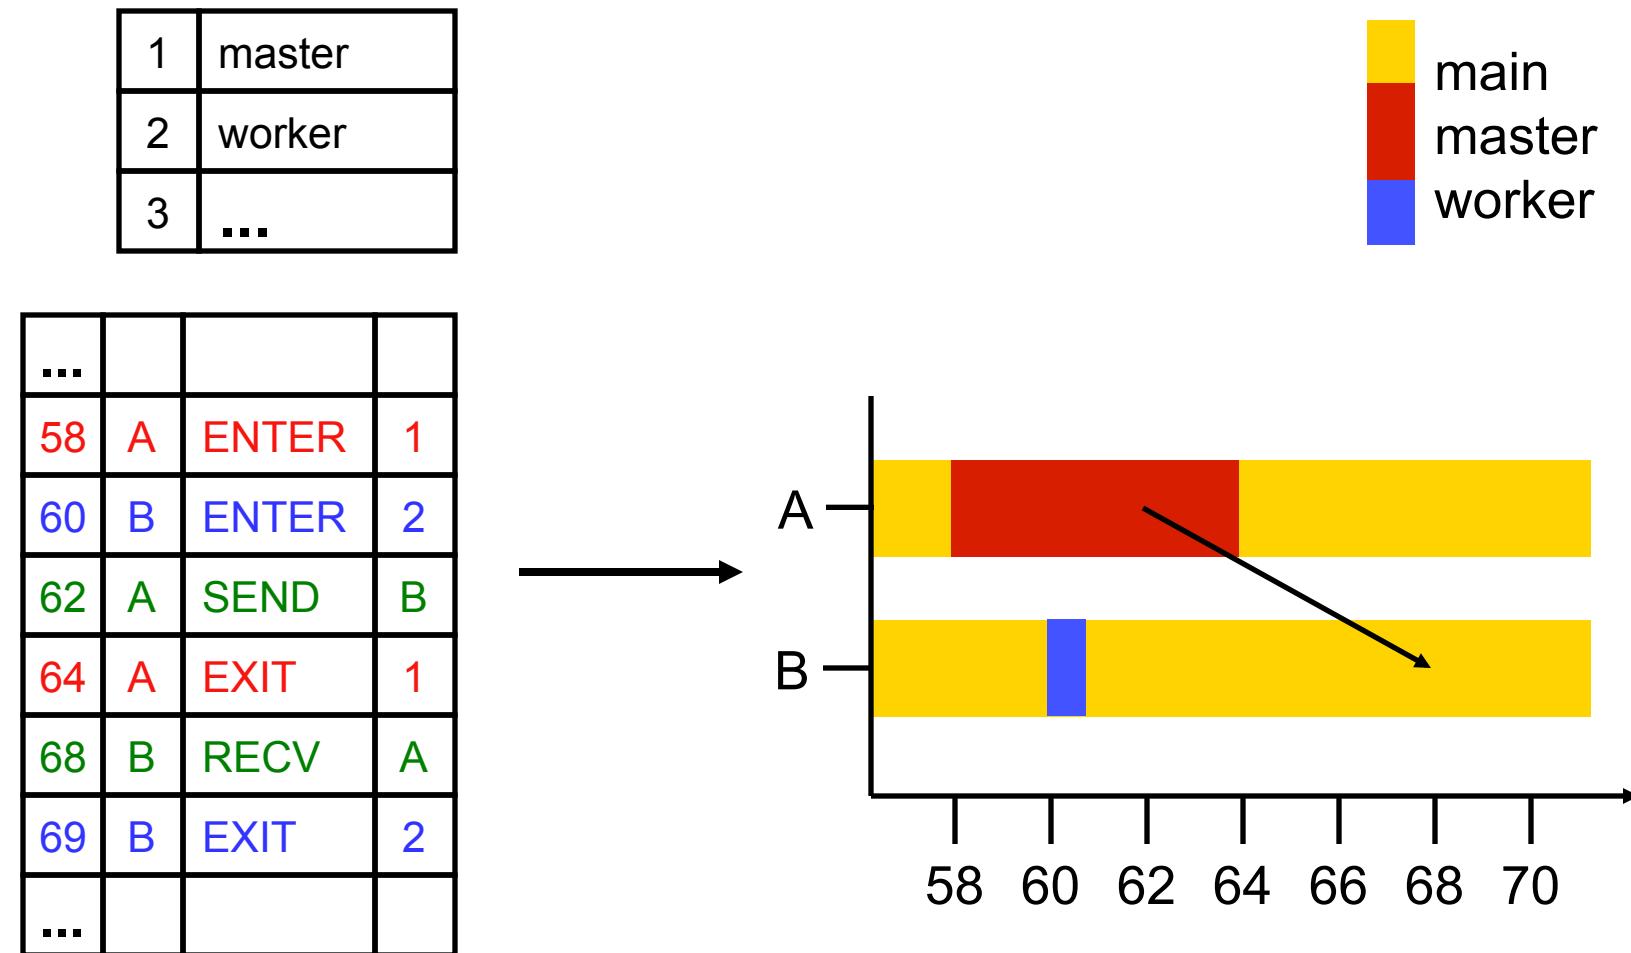

# Profiling / Tracing Comparison

---

- Profiling
  - ☺ Finite, bounded performance data size
  - ☺ Applicable to both direct and indirect methods
  - ☹ Loses time dimension (not entirely)
  - ☹ Lacks ability to fully describe process interaction
- Tracing
  - ☺ Temporal and spatial dimension to performance data
  - ☺ Capture parallel dynamics and process interaction
  - ☹ Some inconsistencies with indirect methods
  - ☹ Unbounded performance data size (large)
  - ☹ Complex event buffering and clock synchronization

# Trace Formats

---

- Different tools produce different formats
  - Differ by event types supported
  - Differ by ASCII and binary representations
    - Vampir Trace Format (VTF)
    - KOJAK/Scalasca (EPILOG)
    - Jumpshot (SLOG-2)
    - Paraver
- Open Trace Format (OTF)
  - Supports interoperation between tracing tools

# Generate a Trace File


```
% export TAU_MAKEFILE=$TAU_ROOT/lib/Makefile.tau-mpi-pdt-pgi
% export PATH=$TAU_ROOT/bin:$PATH
% make F90=tau_f90.sh
(Or edit Makefile and change F90=tau_f90.sh)
%
% export TAU_TRACE=1
%srun -n 4 -p specops ./a.out
% tau_treemerge.pl
(merges binary traces to create tau.trc and tau.edf files)
JUMPSHOT:
% tau2slog2 tau.trc tau.edf -o app.slog2
% jumpshot app.slog2
    OR
VAMPIR:
% tau2otf tau.trc tau.edf app.otf -n 4 -z
(4 streams, compressed output trace)
% vampir app.otf
OR
PARAVER:
% tau_convert -paraver tau.trc tau.edf app.prv
% paraver app.prv
```

# Jumpshot


---

- <http://www-unix.mcs.anl.gov/perfvis/software/viewers/index.htm>
- Developed at Argonne National Laboratory as part of the MPICH project
  - Also works with other MPI implementations
  - Jumpshot is bundled with the TAU package
- Java-based tracefile visualization tool for postmortem performance analysis of MPI programs
- Latest version is Jumpshot-4 for SLOG-2 format
  - Scalable level of detail support
  - Timeline and histogram views
  - Scrolling and zooming
  - Search/scan facility

# Jumpshot

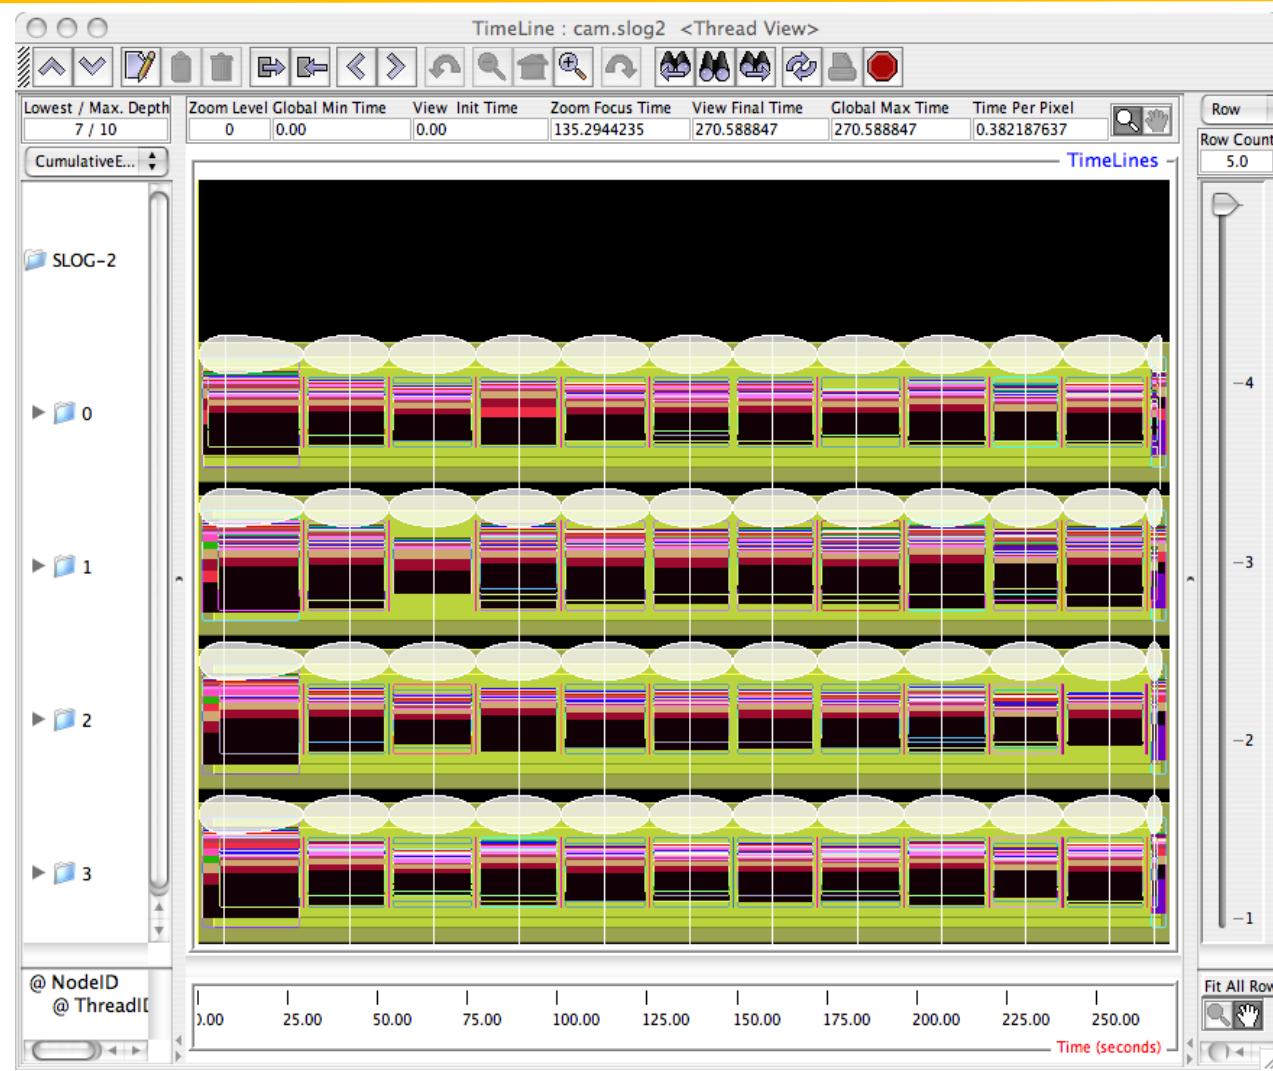


# ParaVer [http://www.bsc.es/paraver]

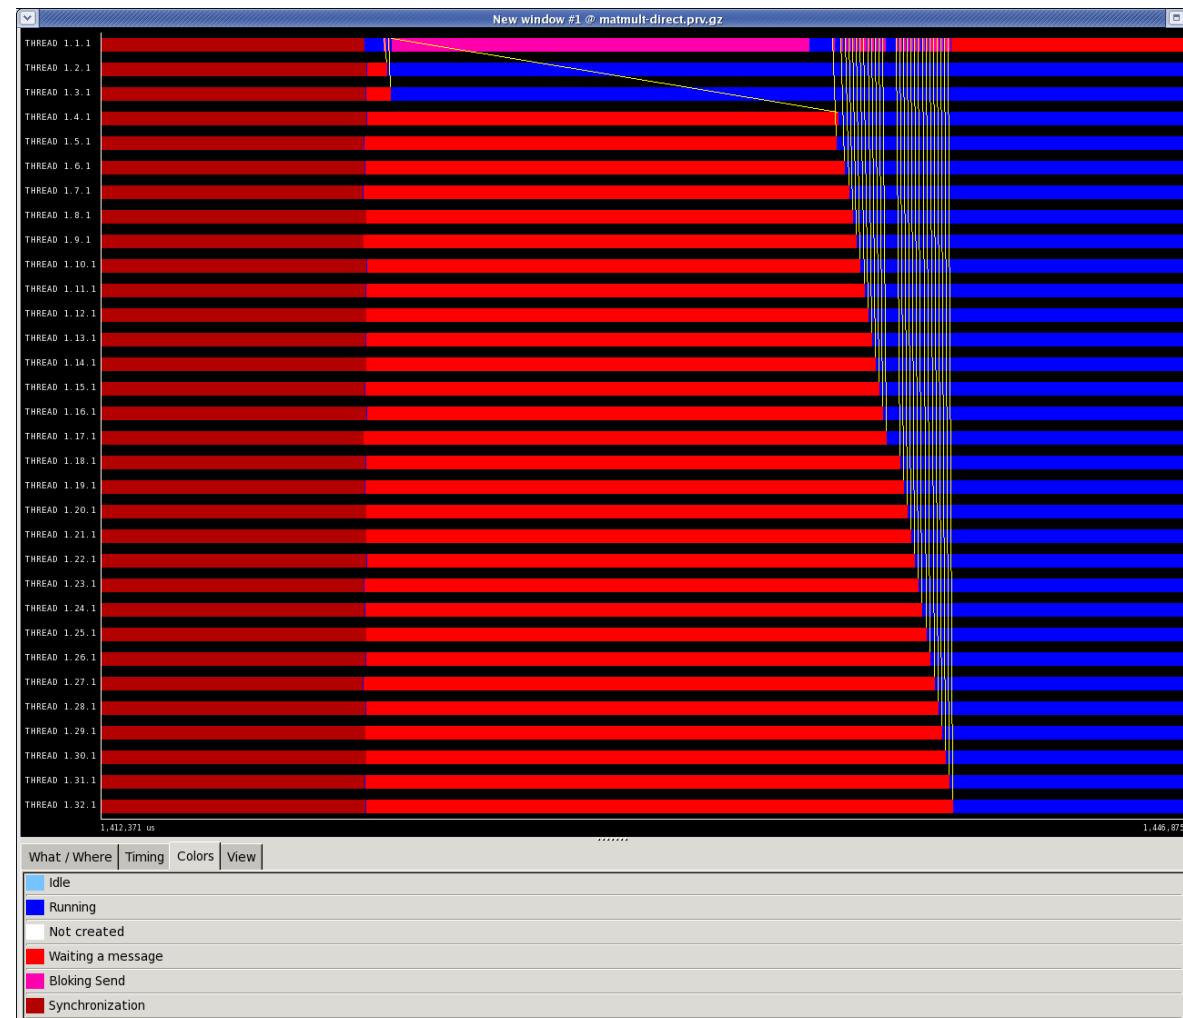


ParaTools

# Usage Scenarios: Generating a Trace File


- Goal: Identify the temporal aspect of performance. What happens in my code at a given time? When?
- Event trace visualized in Vampir/Jumpshot

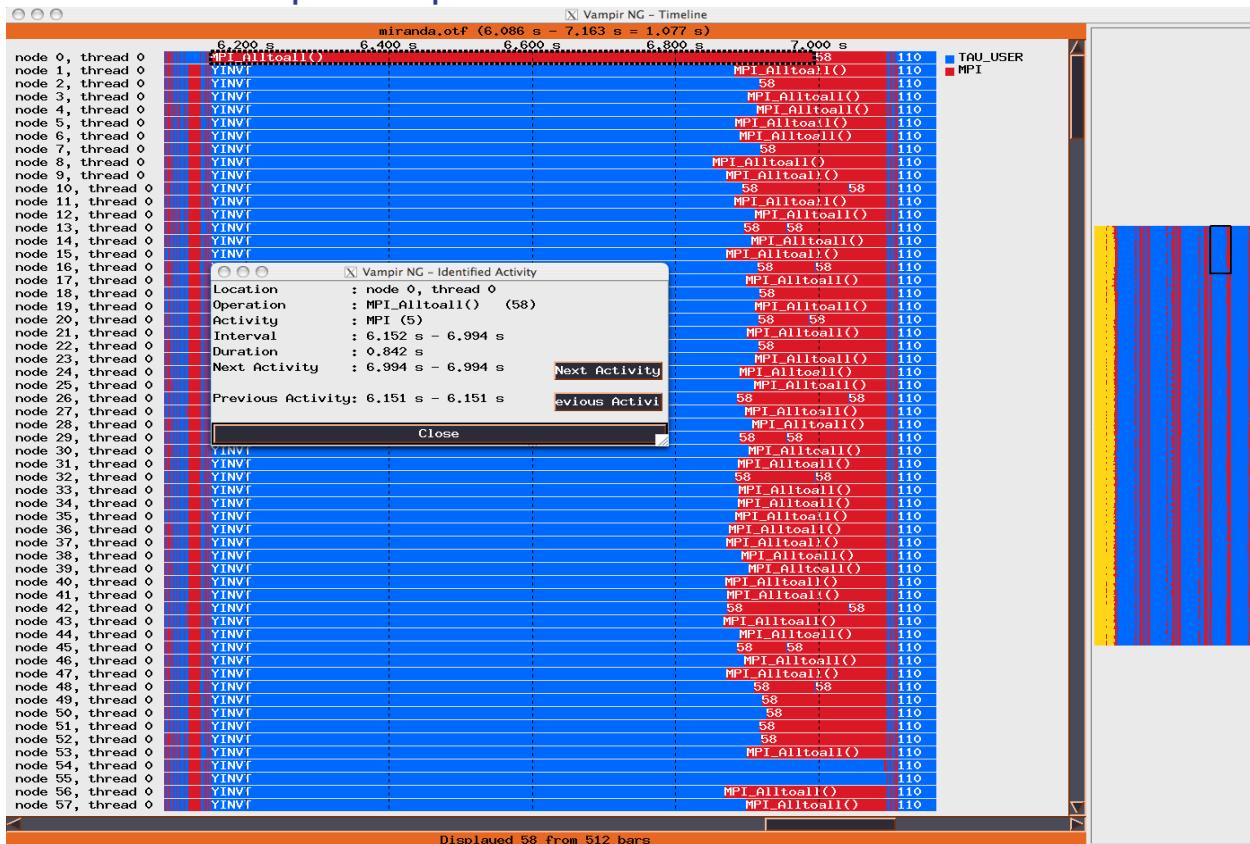

# VNG Process Timeline with PAPI Counters

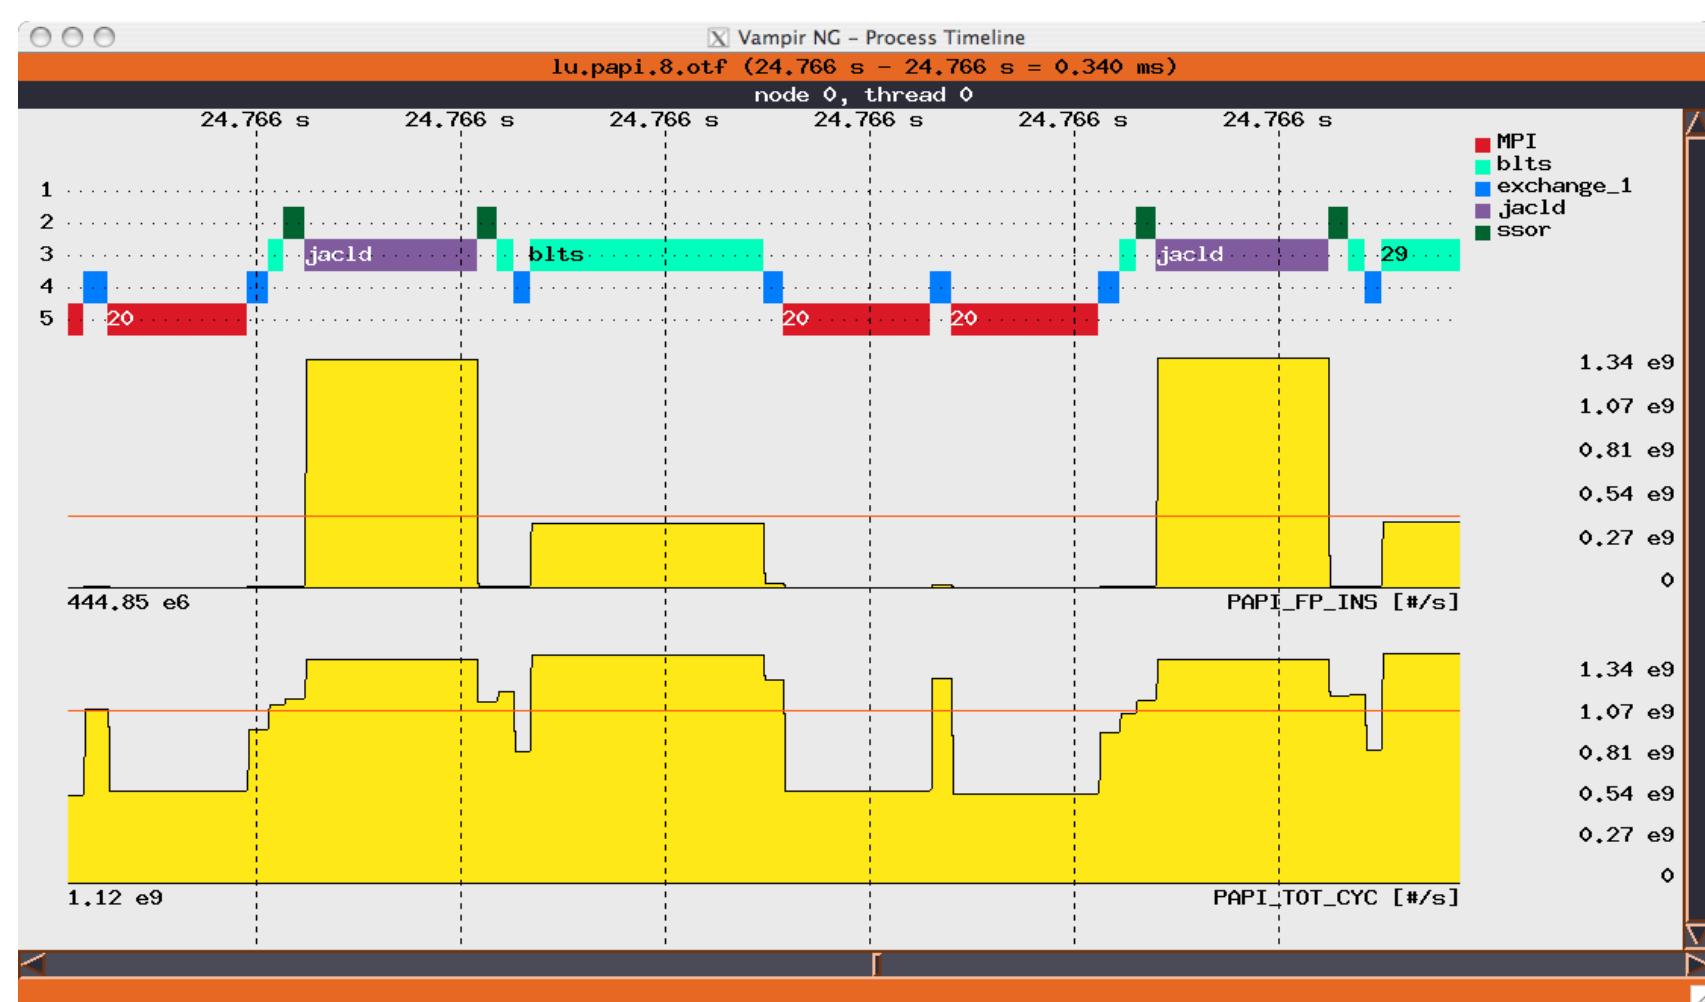


# Vampir Counter Timeline Showing I/O BW

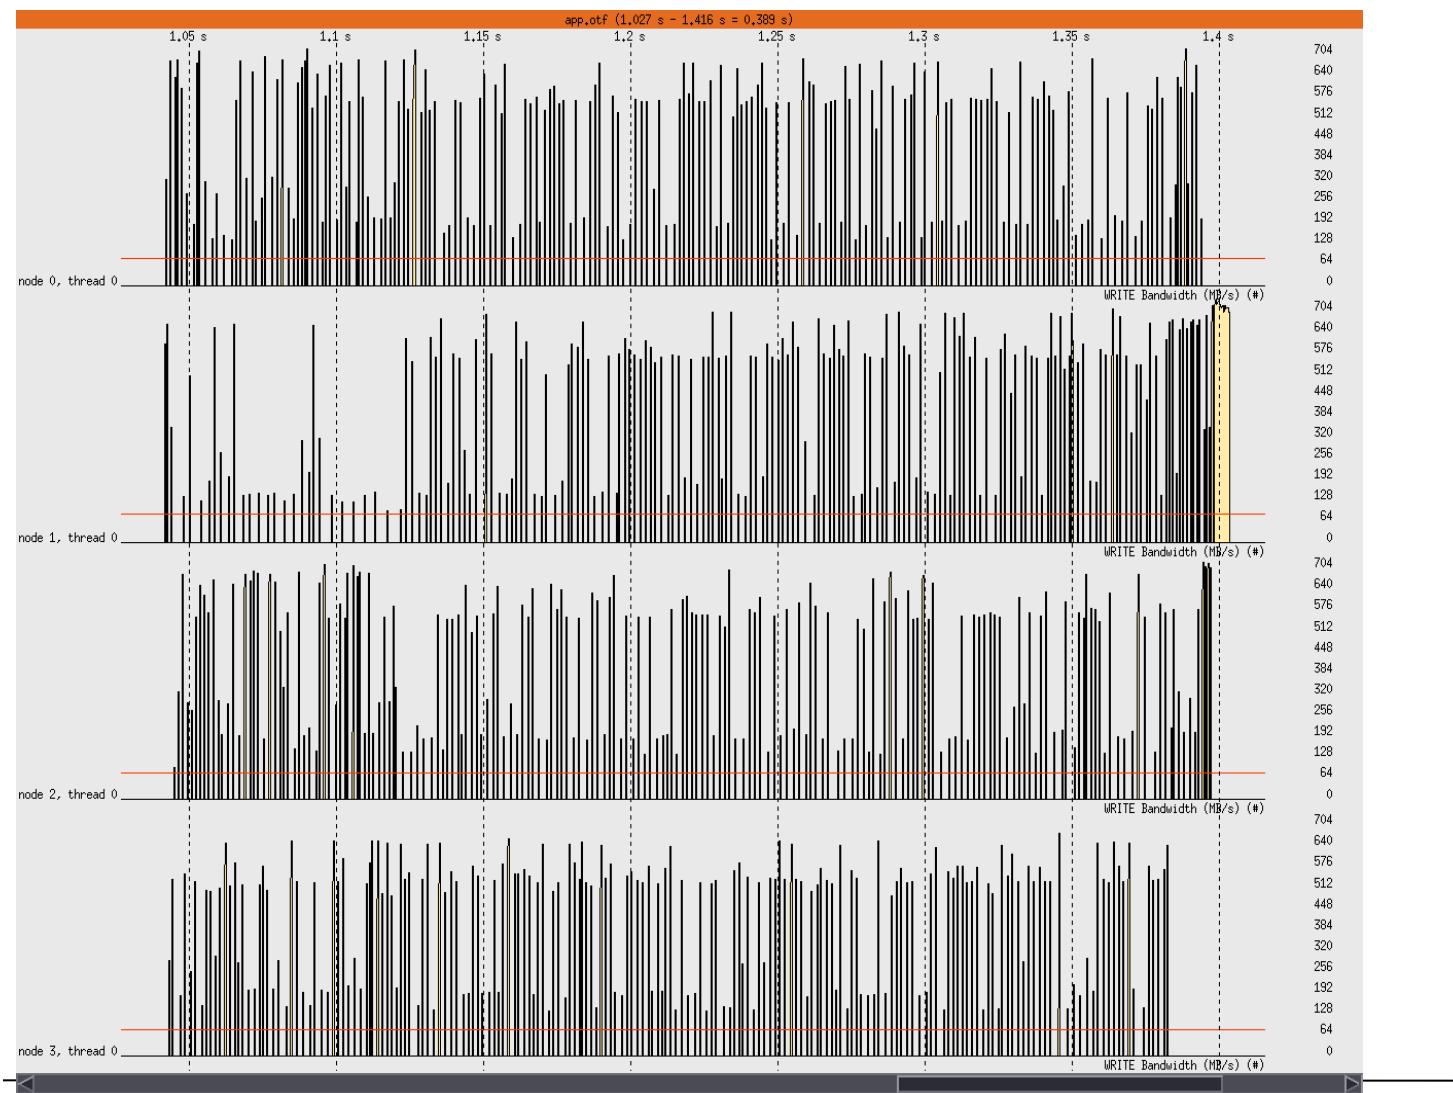

Paratools

---

Running the application, generation of performance data

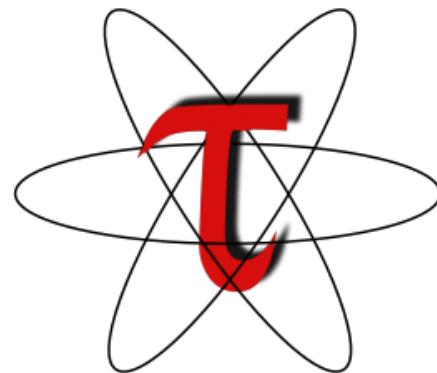


# Environment Variables in TAU

Environment Variable	Default	Description
TAU_TRACE	0	Setting to 1 turns on tracing
TAU_CALLPATH	0	Setting to 1 turns on callpath profiling
TAU_TRACK_MEMORY_LEAKS	0	Setting to 1 turns on leak detection (for use with tau_exec -memory)
TAU_TRACK_HEAP or TAU_TRACK_HEADROOM	0	Setting to 1 turns on tracking heap memory/headroom at routine entry & exit using context events (e.g., Heap at Entry: main=>foo=>bar)
TAU_CALLPATH_DEPTH	2	Specifies depth of callpath. Setting to 0 generates no callpath or routine information, setting to 1 generates flat profile and context events have just parent information (e.g., Heap Entry: foo)
TAU_TRACK_IO_PARAMS	0	Setting to 1 with –optTrackIO or tau_exec –io captures arguments of I/O calls
TAU_SYNCHRONIZE_CLOCKS	1	Synchronize clocks across nodes to correct timestamps in traces
TAU_COMM_MATRIX	0	Setting to 1 generates communication matrix display using context events
TAU_THROTTLE	1	Setting to 0 turns off throttling. Enabled by default to remove instrumentation in lightweight routines that are called frequently
TAU_THROTTLE_NUMCALLS	100000	Specifies the number of calls before testing for throttling
TAU_THROTTLE_PERCALL	10	Specifies value in microseconds. Throttle a routine if it is called over 100000 times and takes less than 10 usec of inclusive time per call
TAU_COMPENSATE	0	Setting to 1 enables runtime compensation of instrumentation overhead
TAU_PROFILE_FORMAT	Profile	Setting to “merged” generates a single file. “snapshot” generates xml format
TAU_METRICS <b>Paratools</b>	TIME	Setting to a comma separated list generates other metrics. (e.g., TIME:linuxtimers:PAPI_FP_OPS:PAPI_NATIVE_<event>)

# Usage Scenarios: Generating Callpath Profile


- Callpath profile for a given callpath depth:

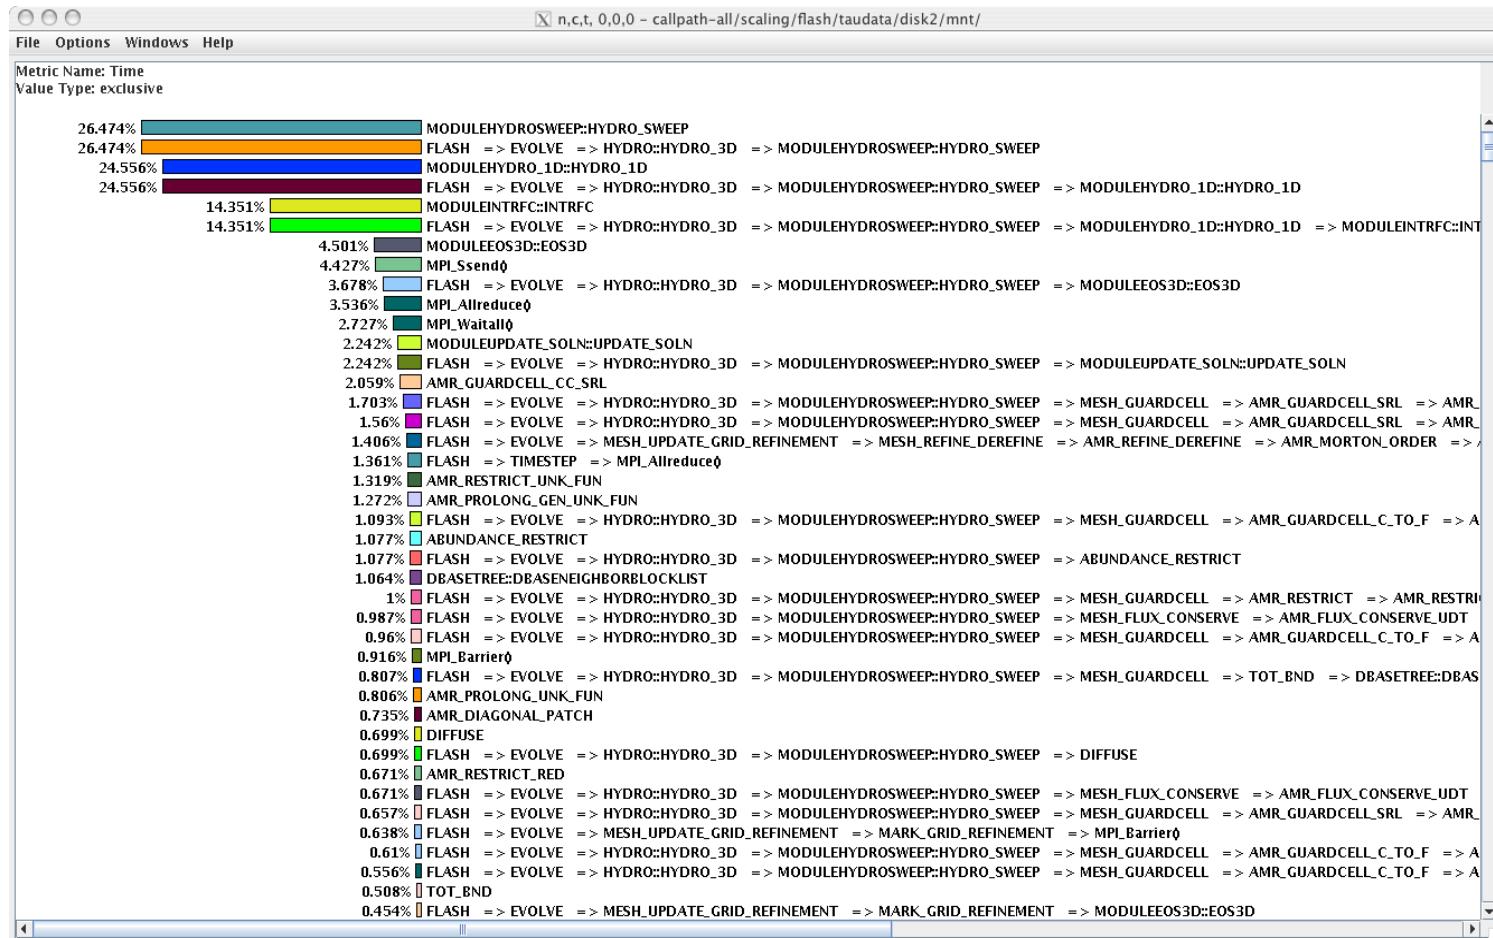

# Callpath Profile

---

- Generates program callgraph

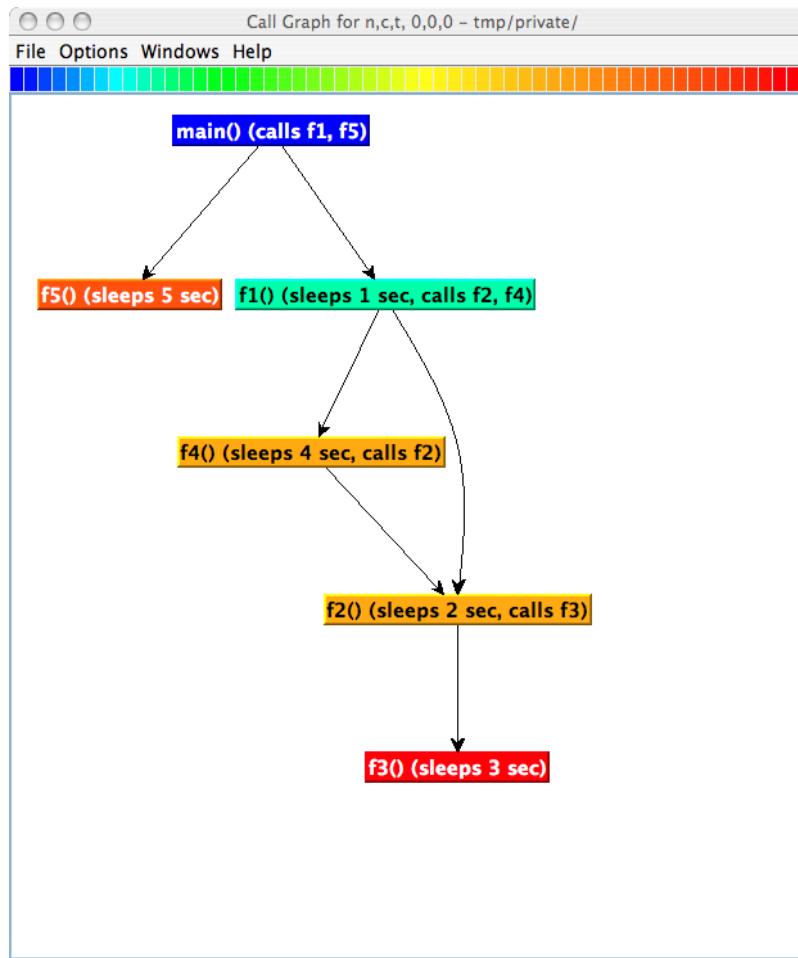


# Communication Matrix

```
% export TAU_MAKEFILE=$TAU_ROOT/lib/Makefile.tau-mpi-pdt
% export PATH=$TAU_ROOT/bin:$PATH
% make F90=tau_f90.sh
(Or edit Makefile and change F90=tau_f90.sh)

%
% export TAU_COMM_MATRIX=1
%srun -n 4 -p specops./a.out (setting the environment variables)

% paraprof
(Windows -> Communication Matrix)
```

# ParaProf: Communication Matrix Display

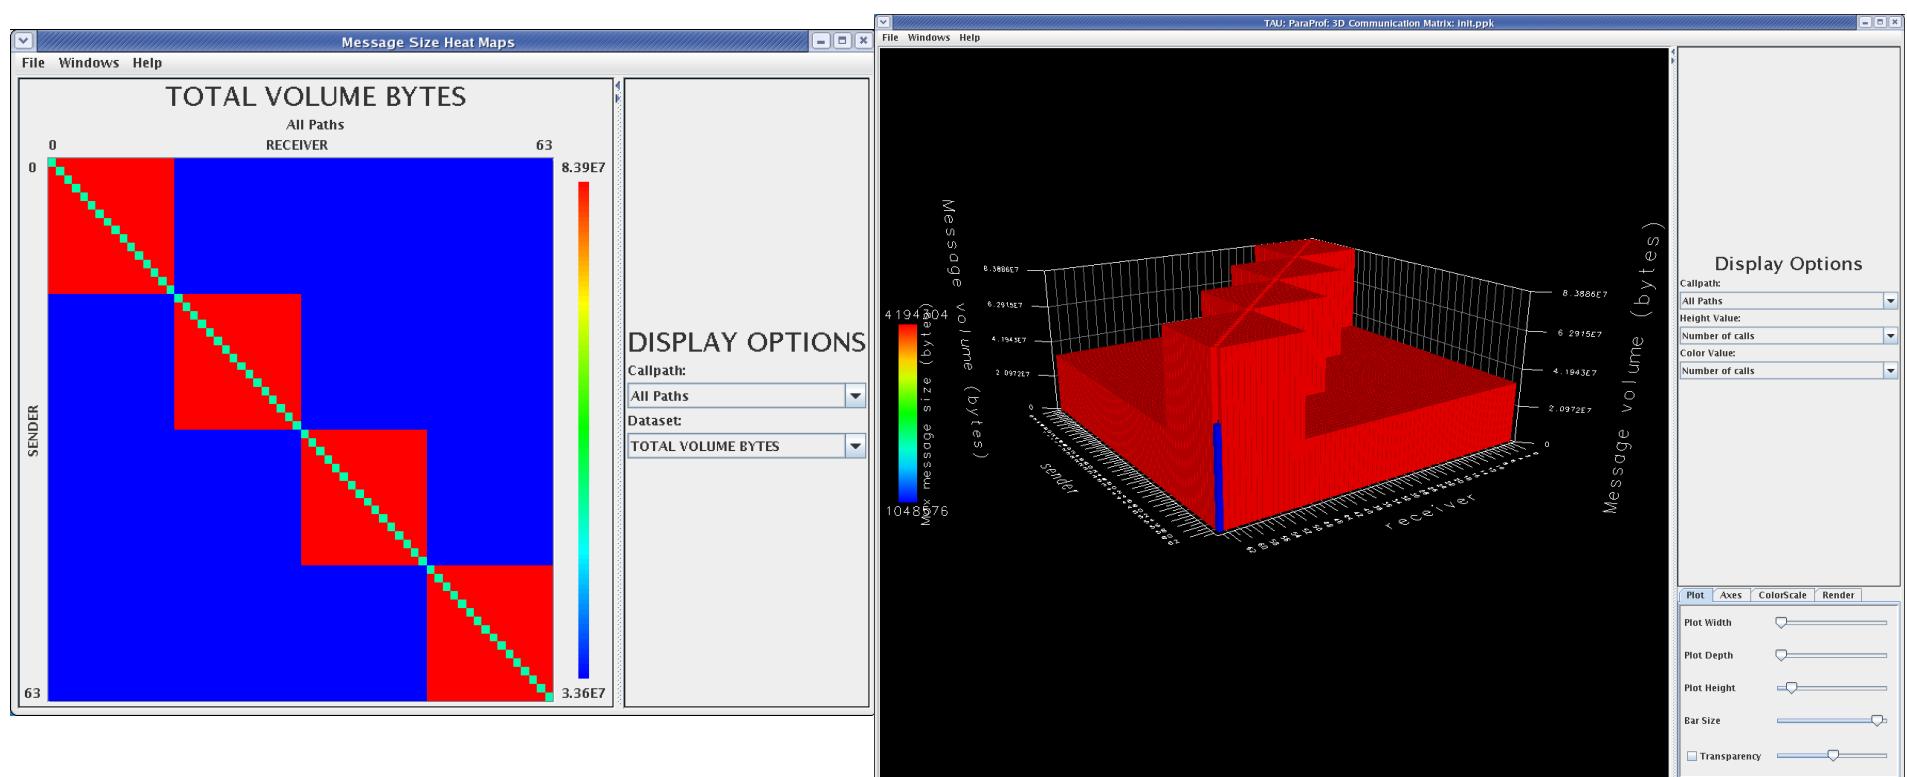

# Generate a Callpath Profile


```
% export TAU_MAKEFILE=$TAU_ROOT/lib/Makefile.tau-mpi-pdt
% export PATH=$TAU_ROOT/bin:$PATH
% make F90=tau_f90.sh
(Or edit Makefile and change F90=tau_f90.sh)

%
% export TAU_CALLPATH=1
% export TAU_CALLPATH_DEPTH=100


%srun -n 4 -p specops ./a.out
% paraprof --pack app.ppk
  Move the app.ppk file to your desktop.
% paraprof app.ppk
(Windows -> Thread -> Call Graph)
```

---

# Analyzing performance data with ParaProf, PerfExplorer

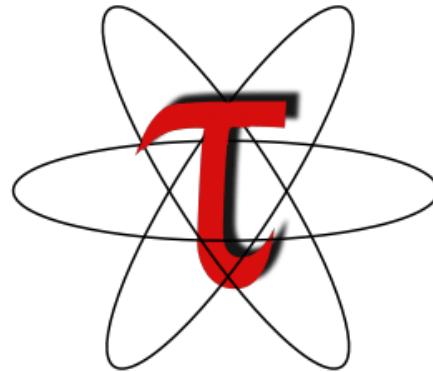


# TAU Performance System Architecture

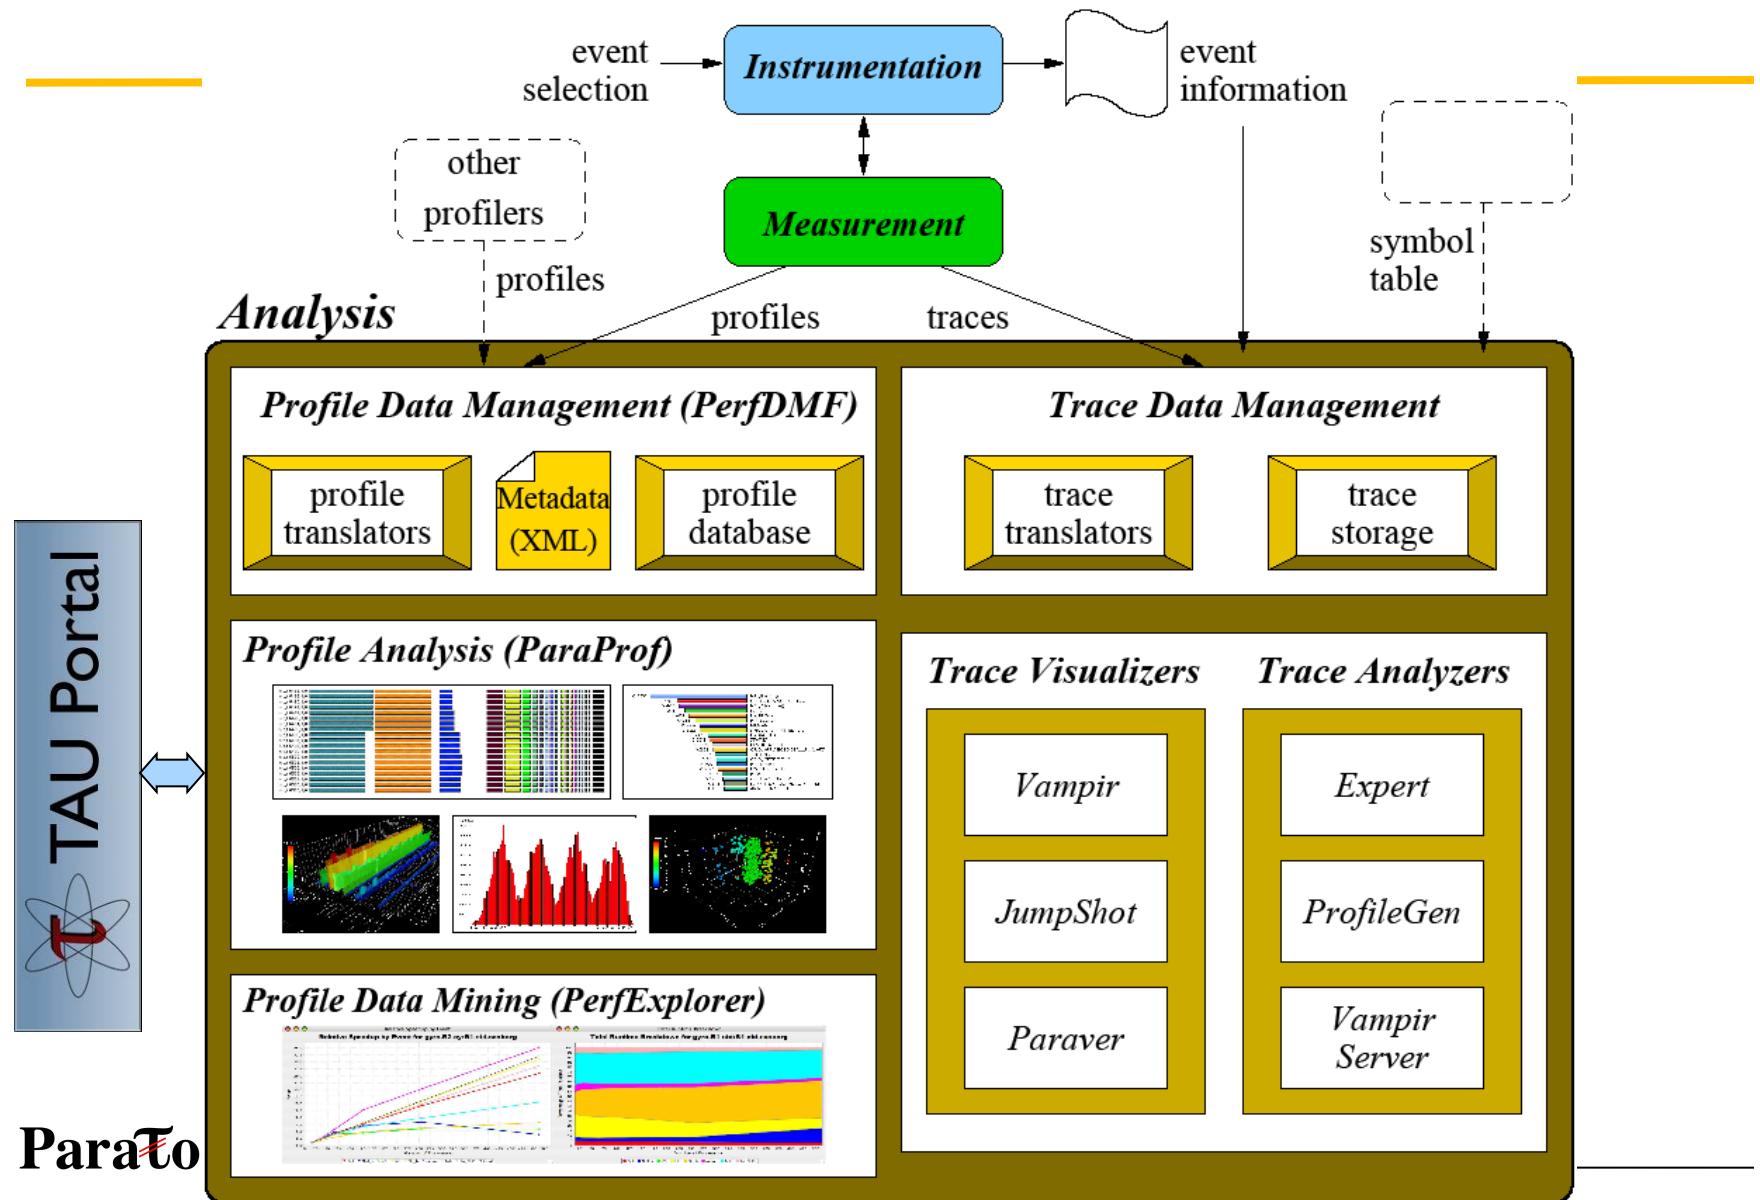

# PerfDMF: Performance Data Mgmt. Framework

## TAU Performance System



raw profiles



\* gprof  
\* mpiP  
\* psrun  
\* HPMtoolkit  
\* ...


XML document



formatted profile data



profile metadata



## Performance Analysis Programs

scalability analysis

ParaProf



cluster analysis



## Query and Analysis Toolkit

Java PerfDMF API


SQL (PostgreSQL, MySQL, DB2, Oracle)




Data Mining  
(Weka)

Statistics  
(R / Omega)

# ParaProf Main Window

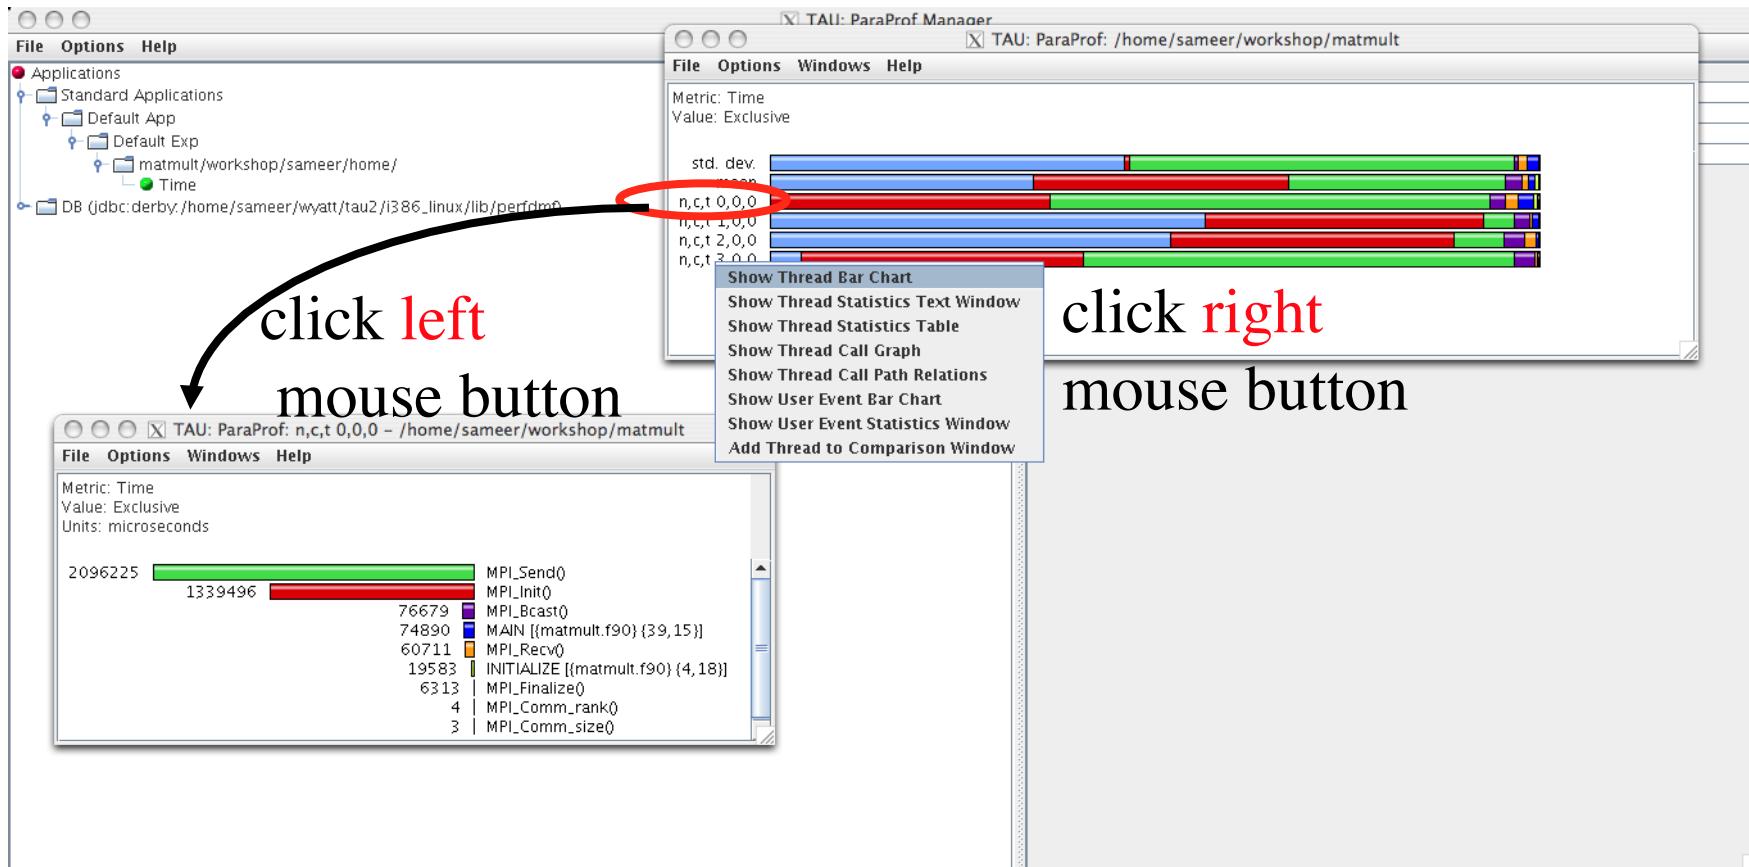


# Comparing Effects of Multi-Core Processors

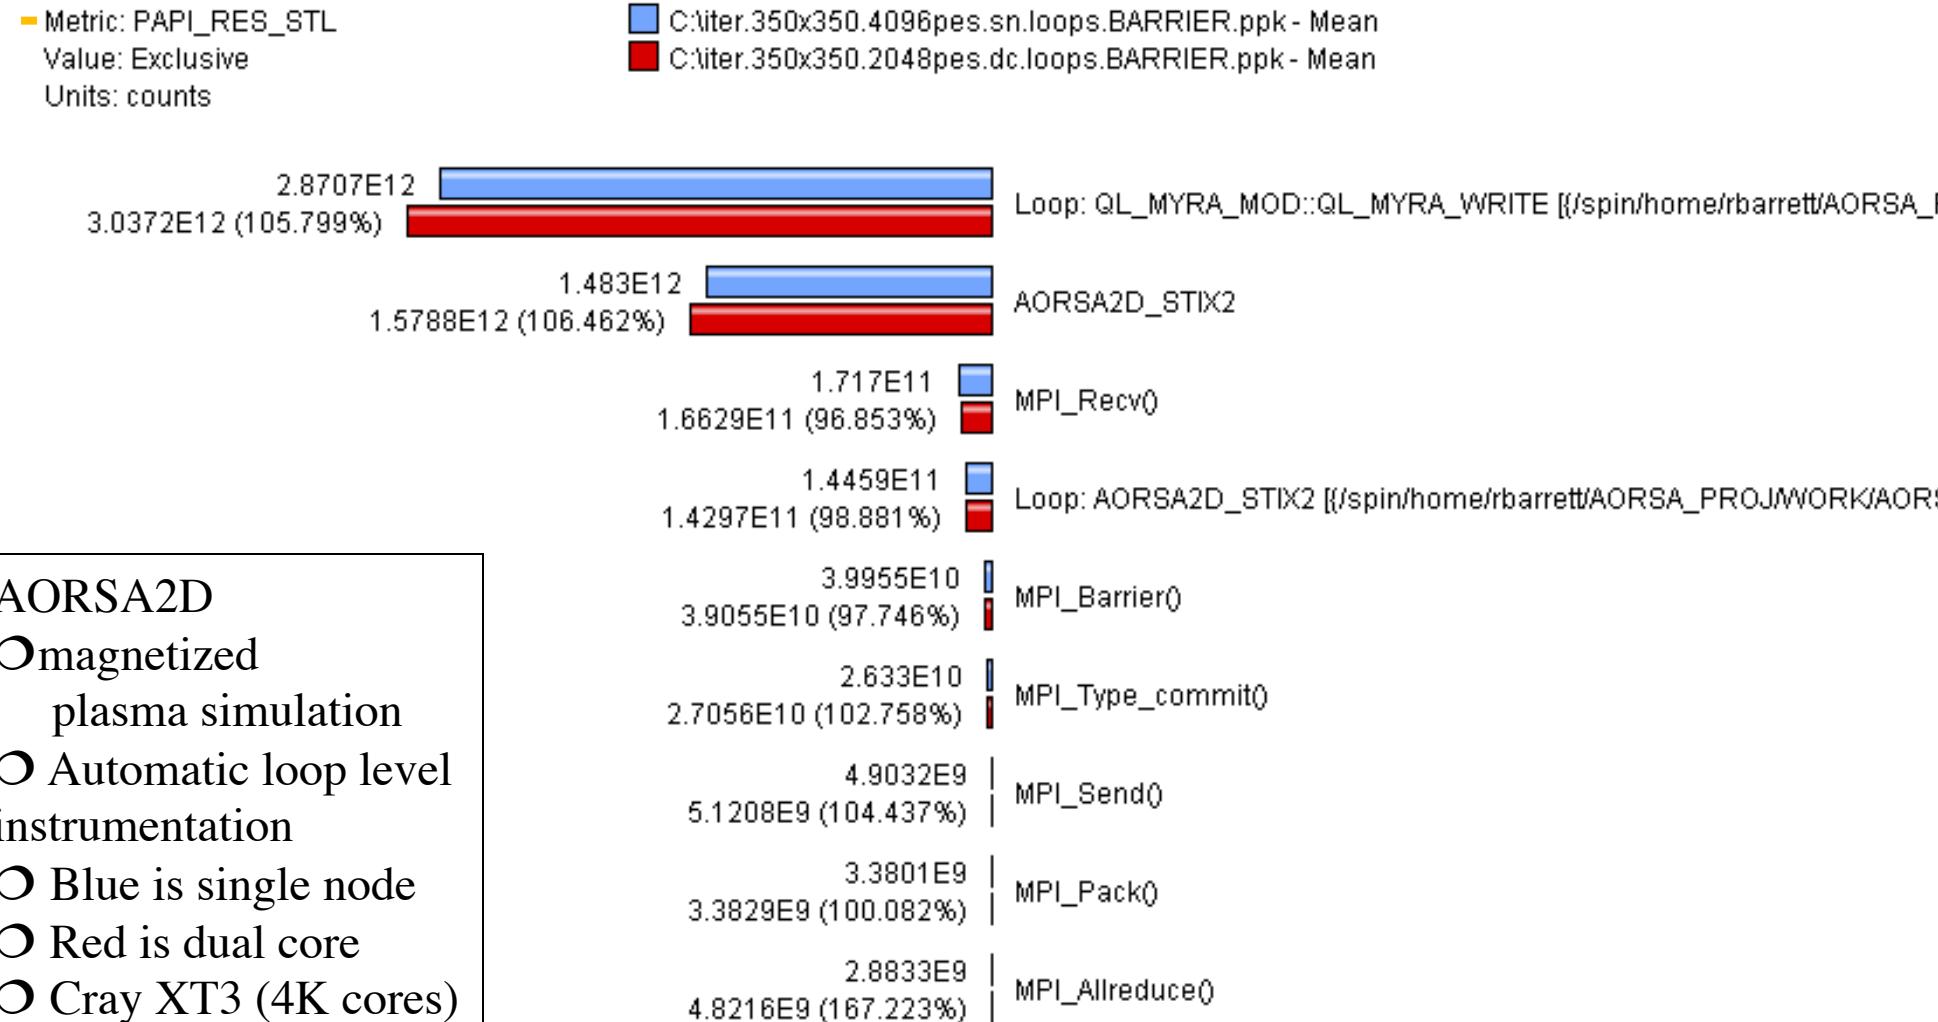


AORSA2D  
○ magnetized plasma simulation  
○ Automatic loop level instrumentation  
○ Blue is single node  
○ Red is dual core  
○ Cray XT3 (4K cores)


# ParaProf: Mflops Sorted by Exclusive Time

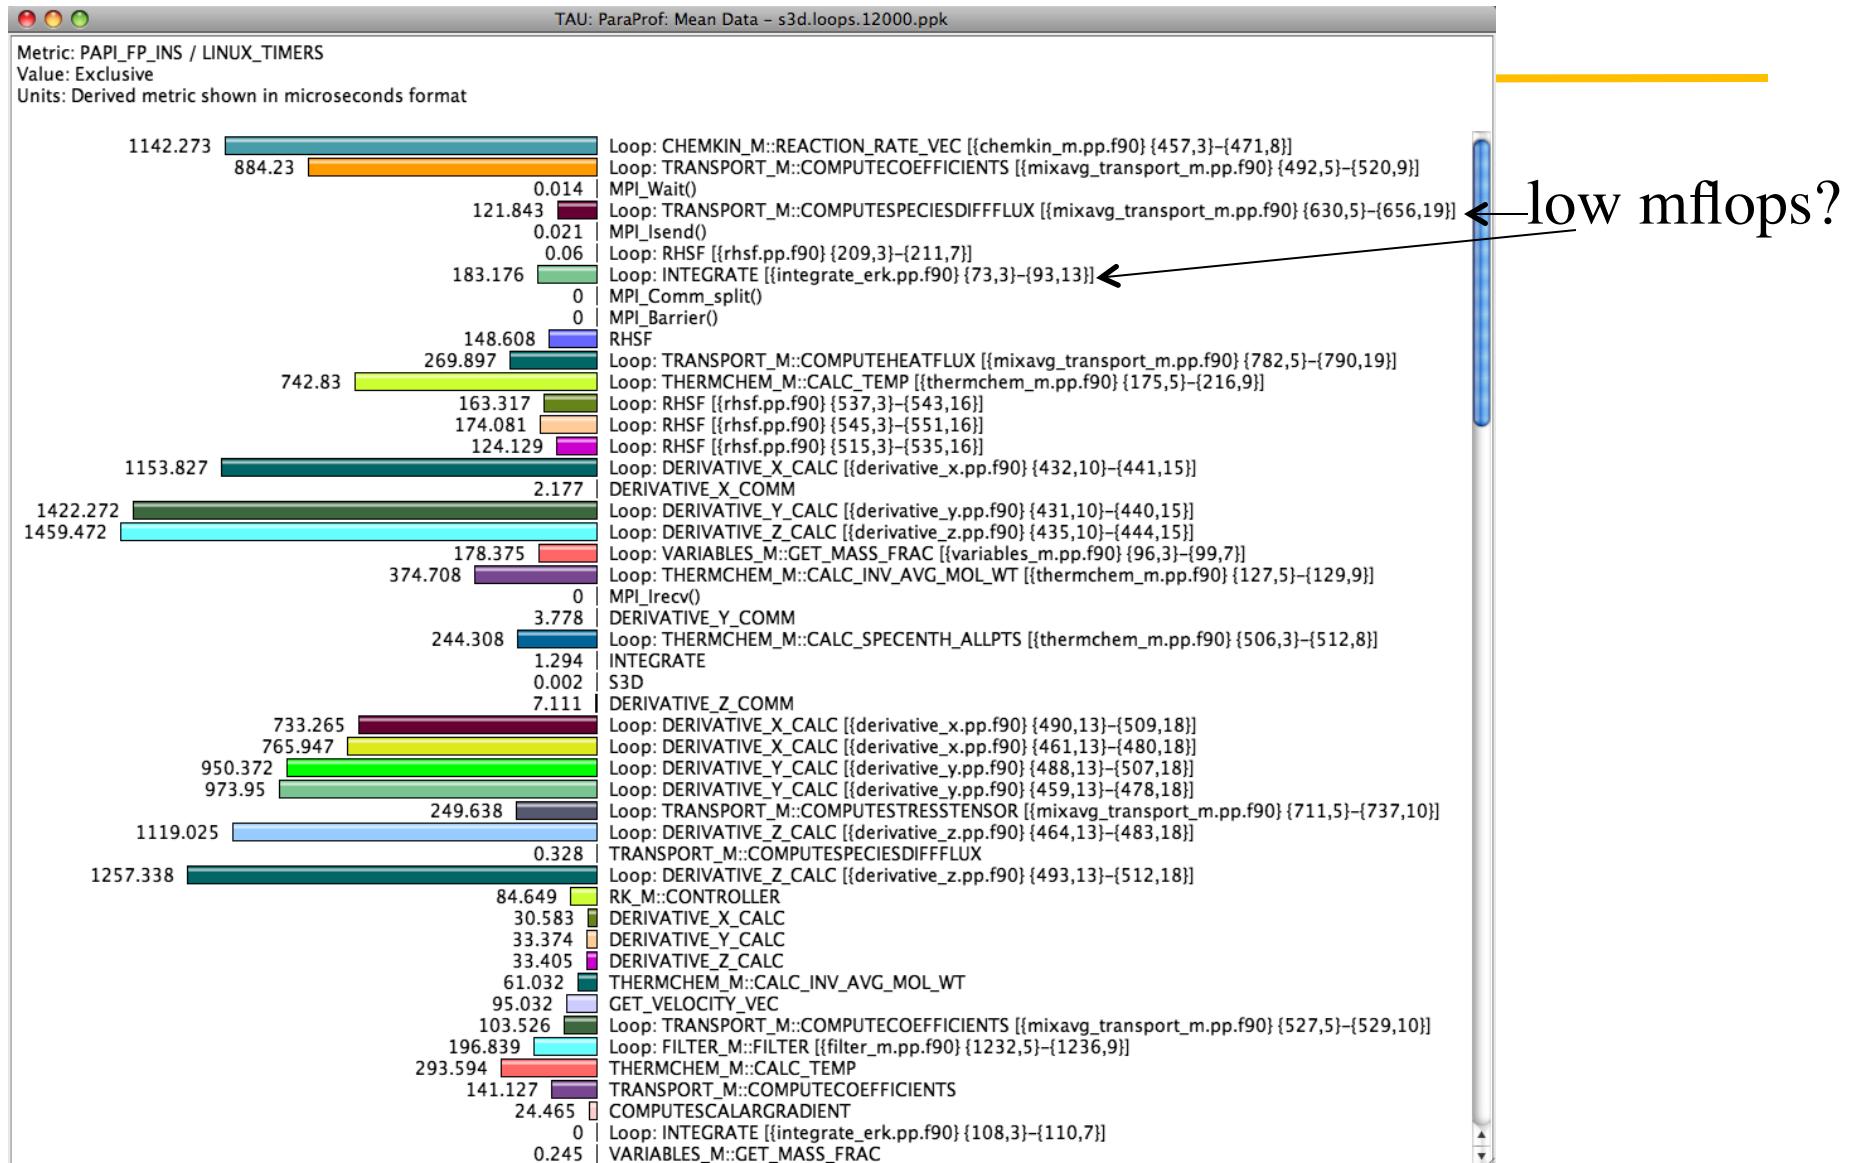


# Parallel Profile Visualization: ParaProf

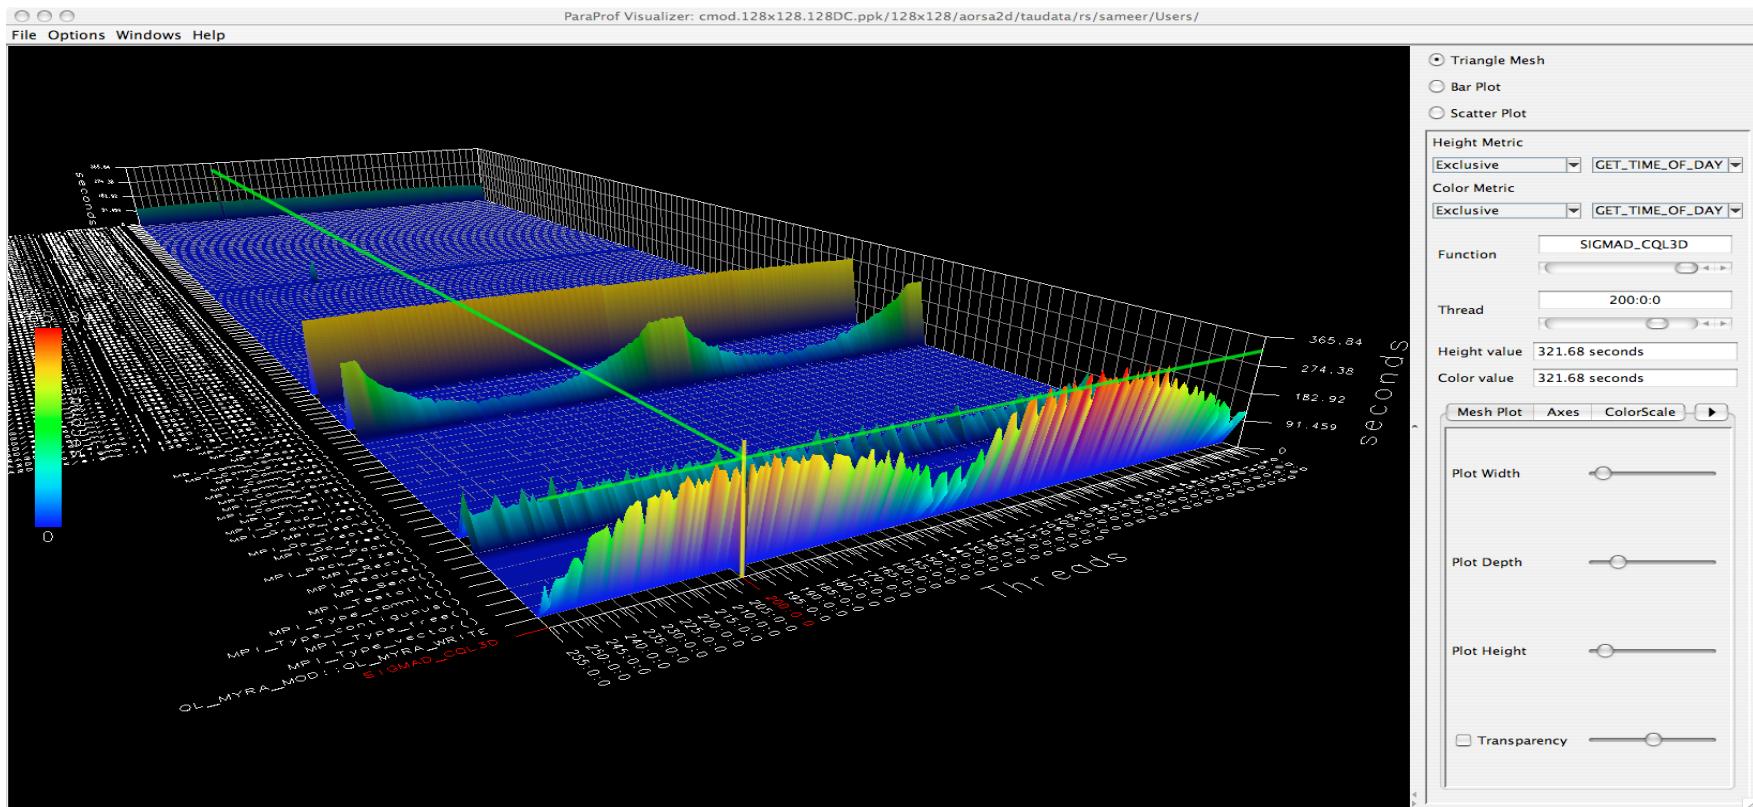


# Scalable Visualization: ParaProf (128k cores)

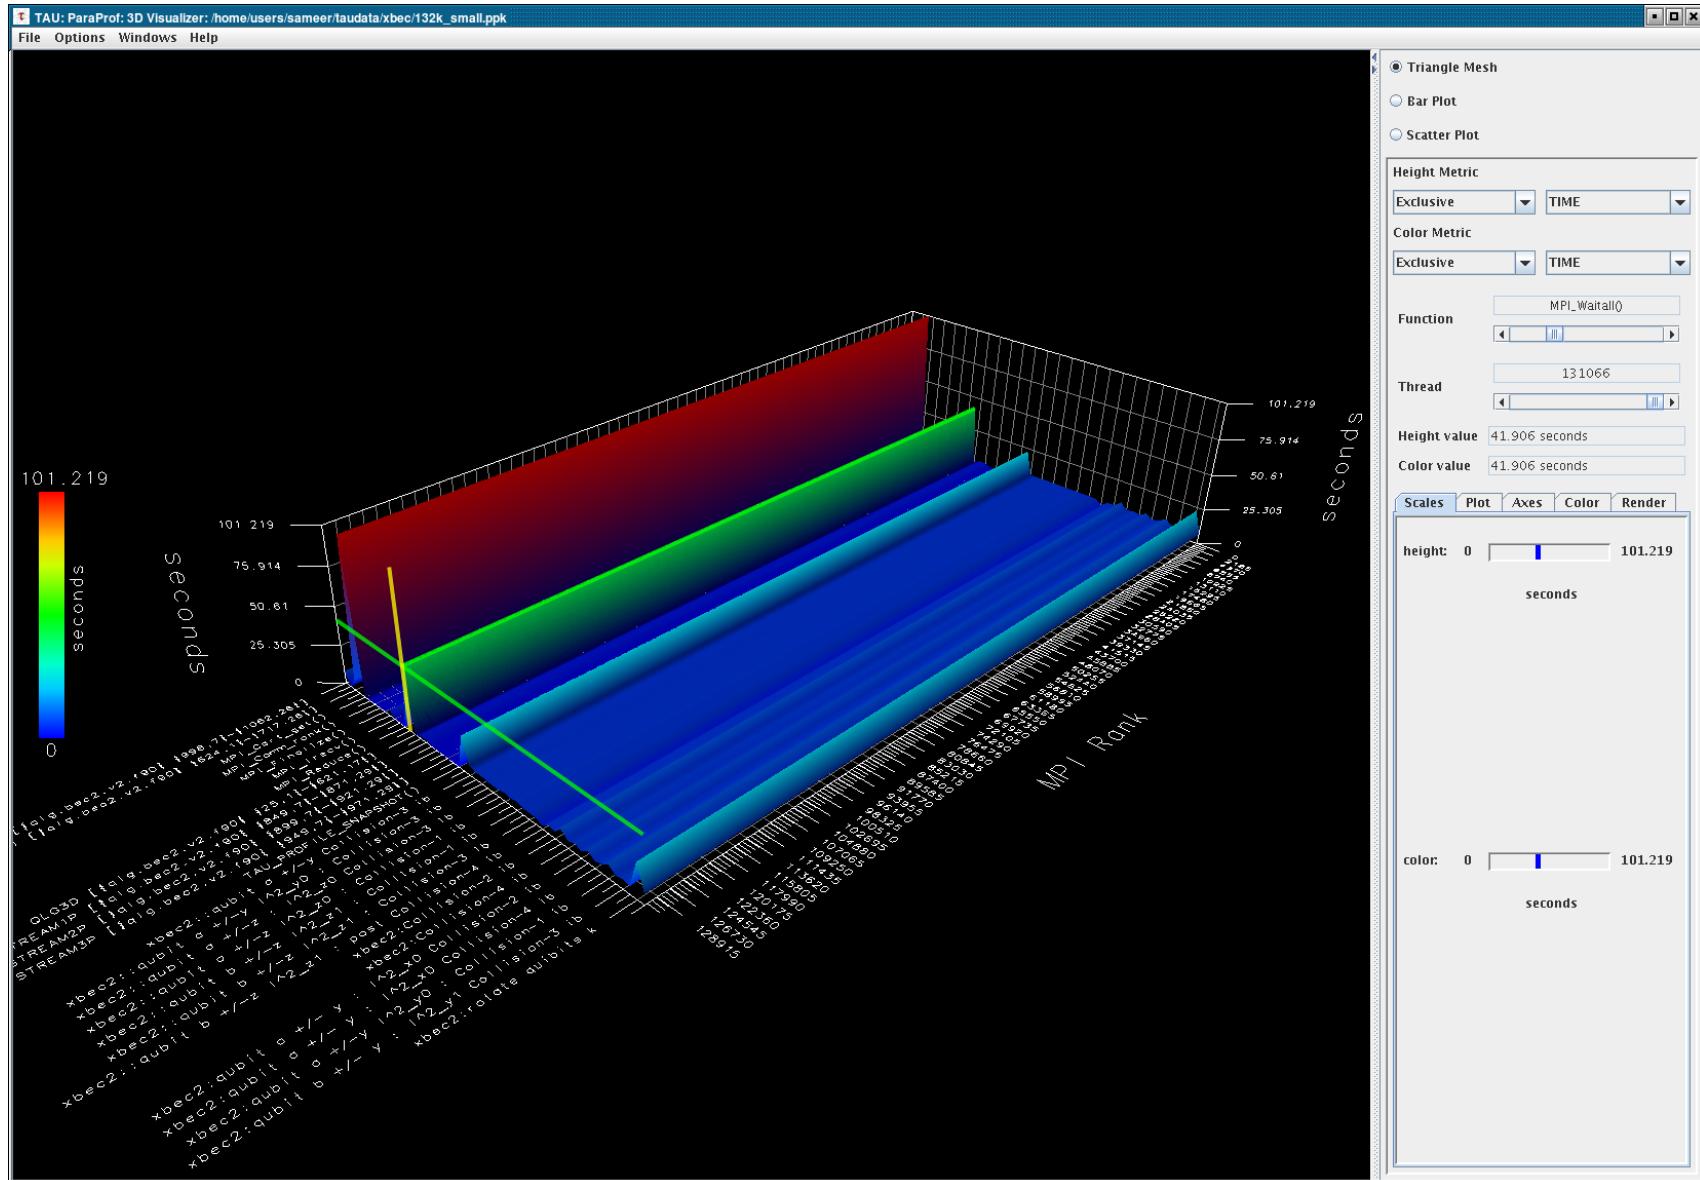


# Scatter Plot: ParaProf (128k cores)

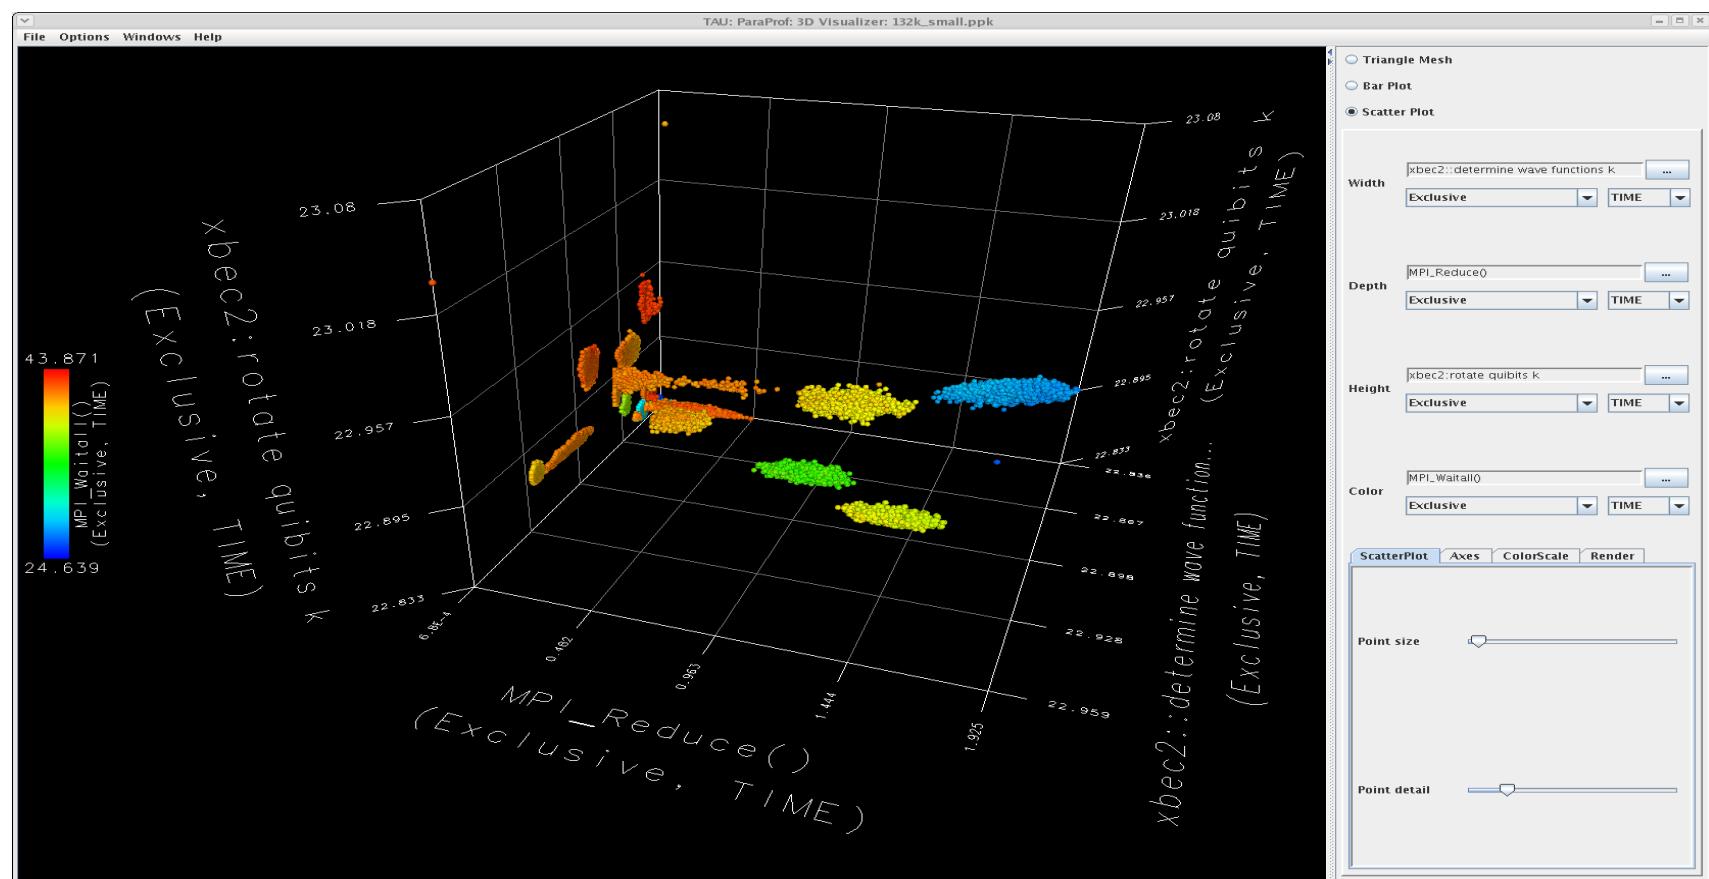


# ParaProf – 3D Full Profile Bar Plot (Flash)

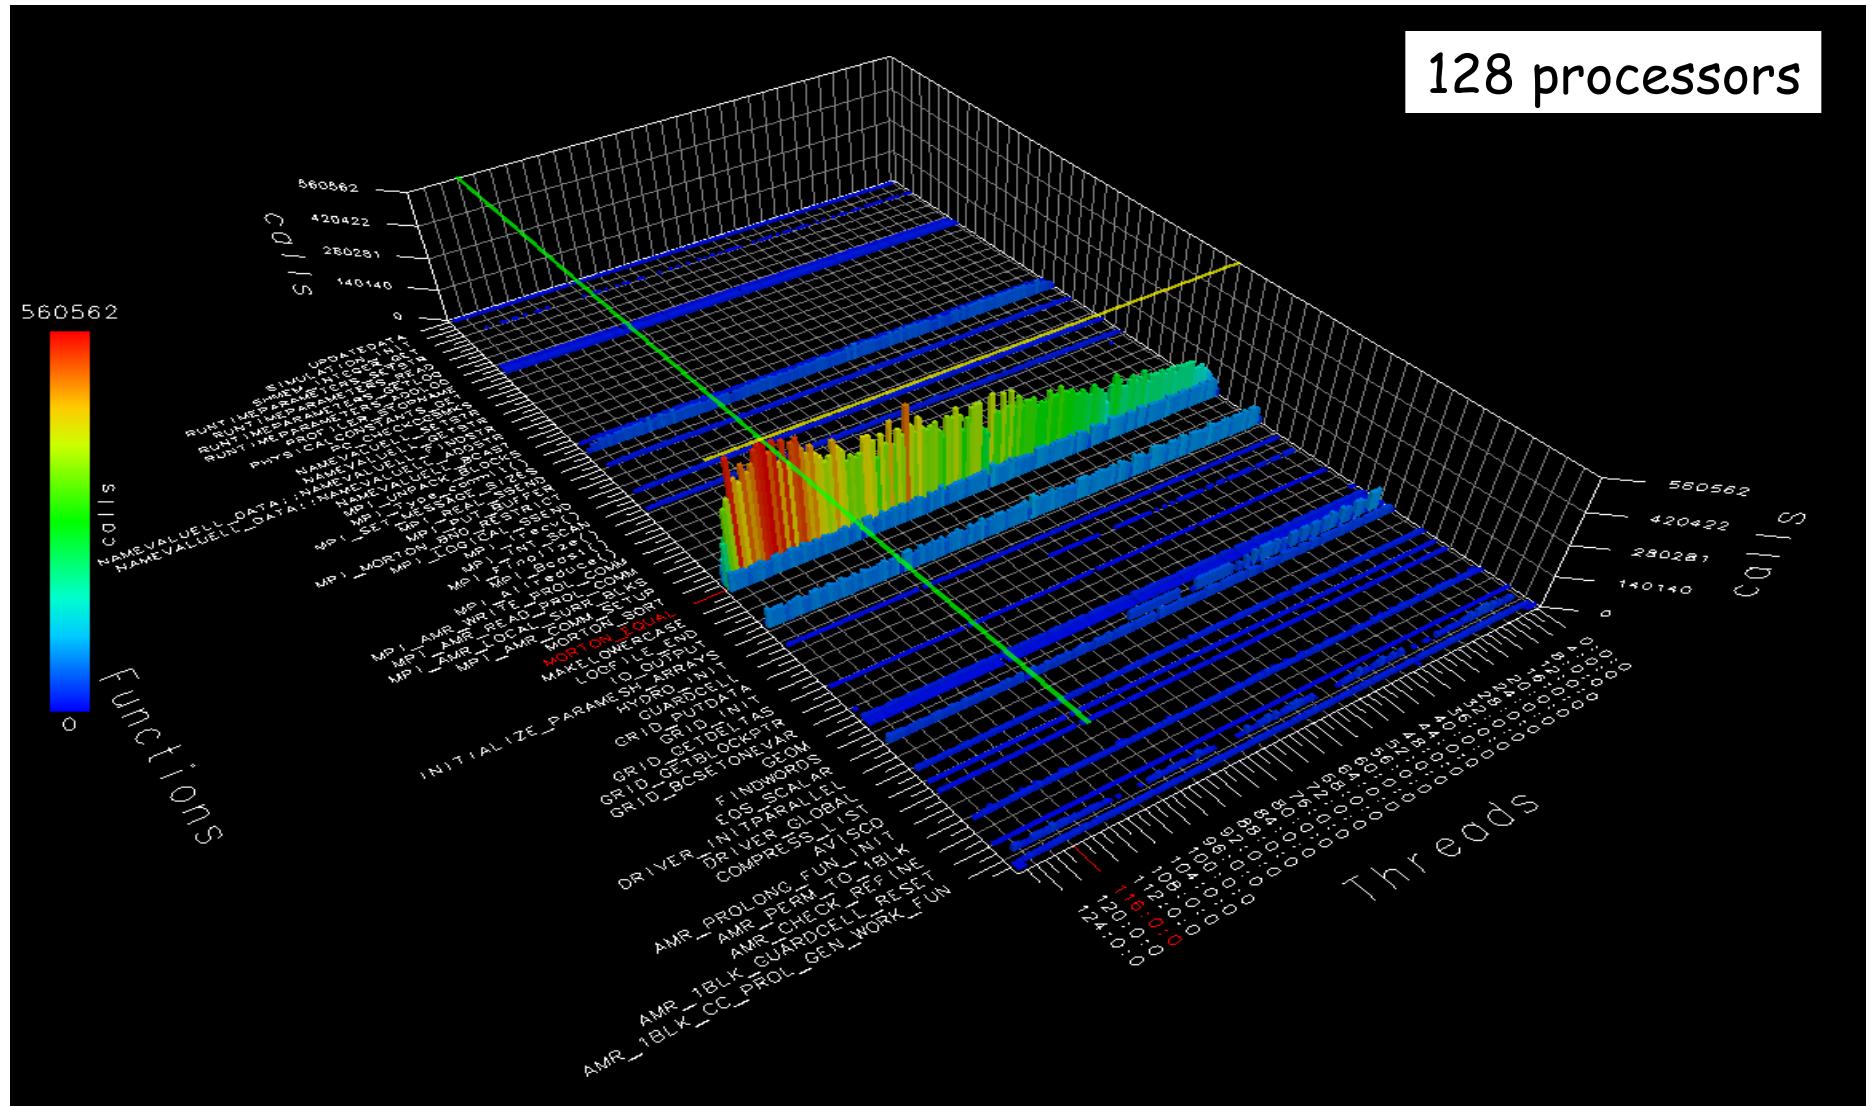

# ParaProf Bar Plot (Zoom in/out +/-)

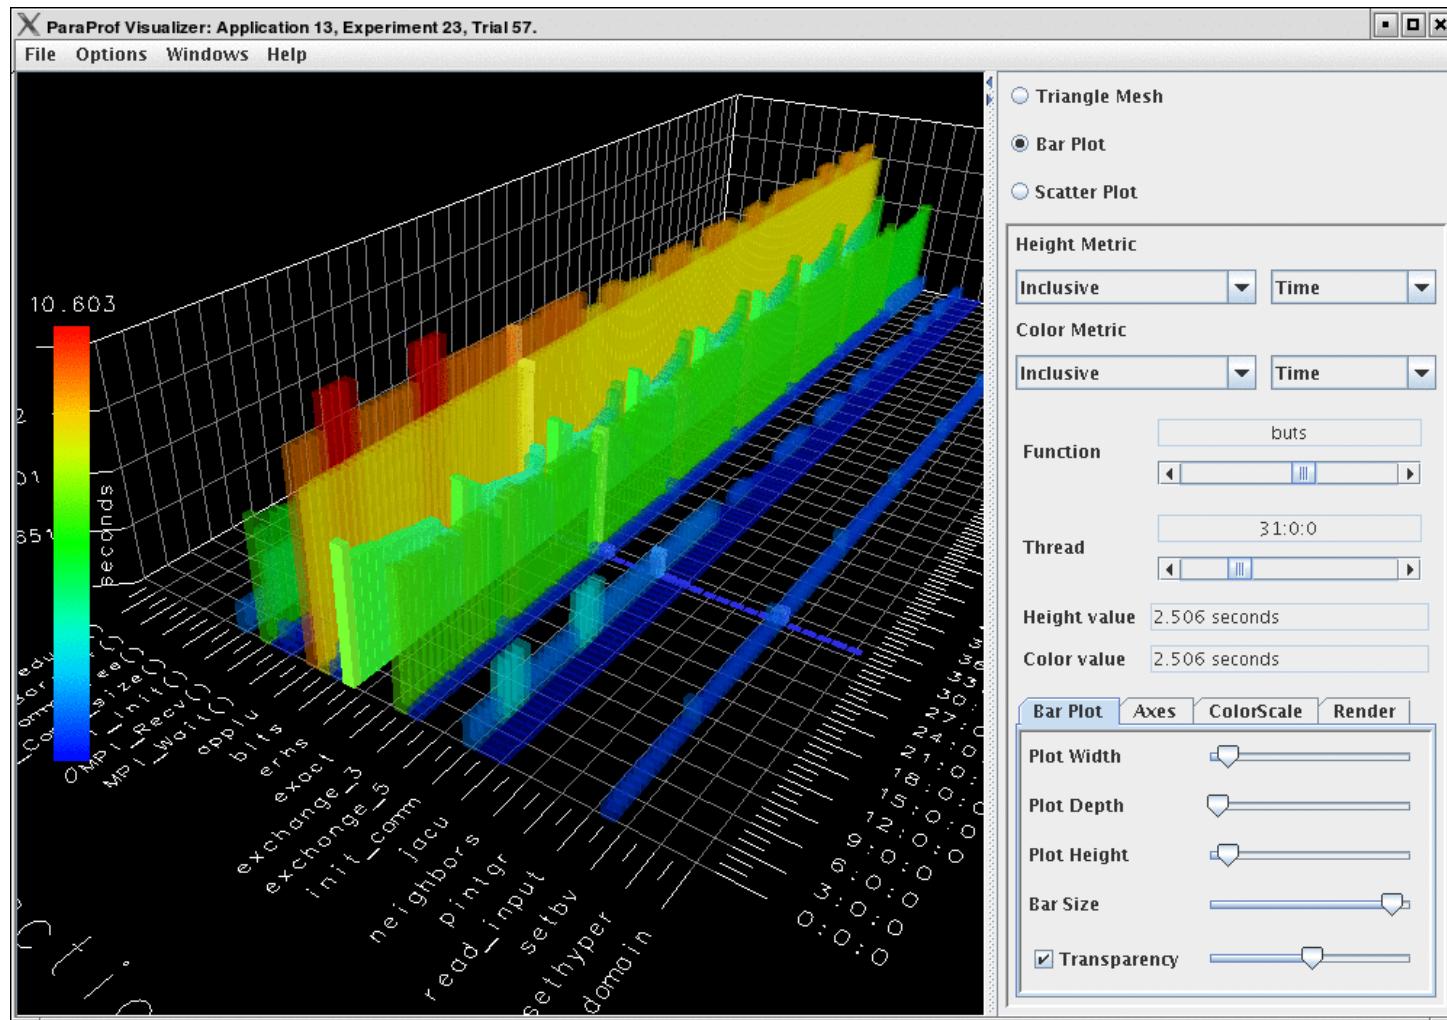

# ParaProf – Callgraph Zoomed (Flash)

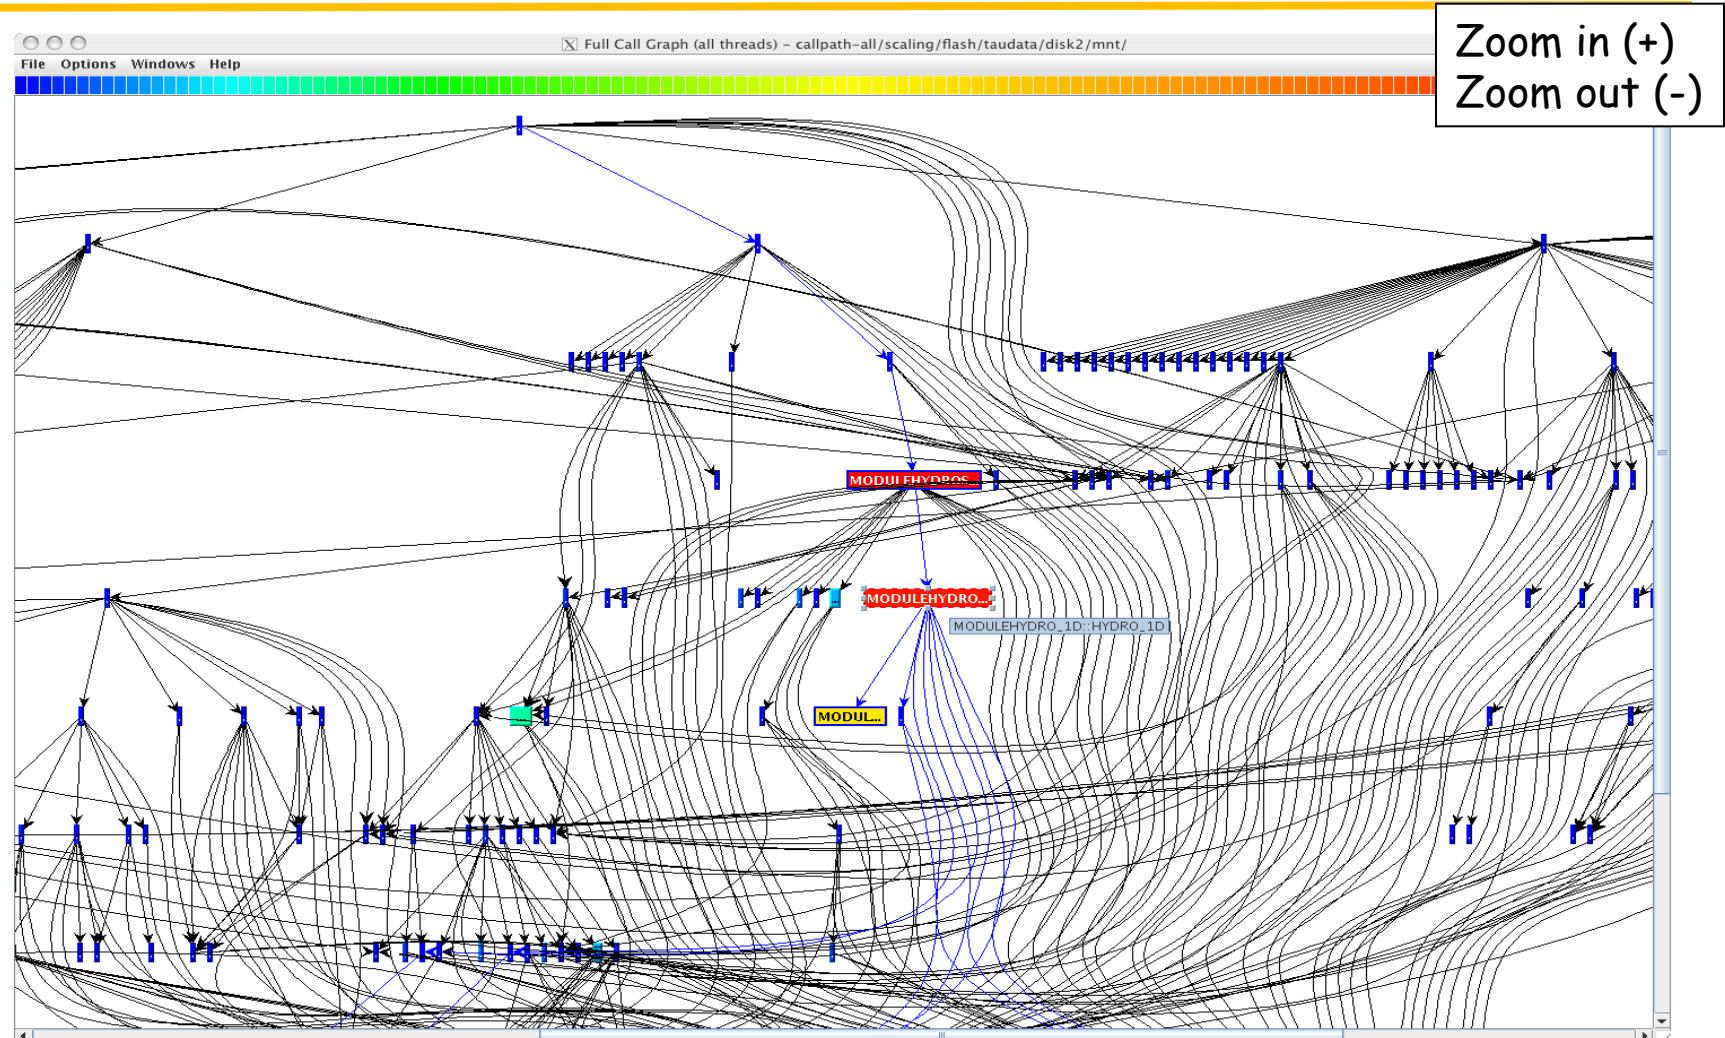

# ParaProf - Thread Statistics Table (GSI)

Thread Statistics: n,c,t, 0,0,0 - comp.ppk/					
	Name	Inclusive Time	Exclusive Time	Calls	Child Calls
▼	GSI	5,223.564	0.098	1	30
█	SPECMOD::INIT_SPEC_VARS	0.26	0.26	1	0
►	MPI_Init()	0.056	0.054	1	1
▼	GSISUB	5,223.094	0.012	1	13
►	RADINFO::RADINFO_READ	0.103	0.101	1	1,196
█	PCPINFO::PCPINFO_READ	0.042	0.042	1	0
▼	GLBSOI	5,212.171	0.024	1	12
█	MPI_Finalize()	1.004	1.004	1	0
►	OBS_PARA	3.635	0.181	1	56
█	JFUNC::CREATE_JFUNC	0.142	0.142	1	0
█	GUESS_GRIDS::CREATE_GES_BIAS_GRIDS	0.059	0.059	1	0
►	READ_GUESS	1,406.412	0.023	1	8
▼	READ_OBS	3,770.188	0.016	1	6
█	MPI_Allreduce()	3,725.802	3,725.802	3	0
►	READ_BUFRTOVS	44.369	0.254	1	871,535
█	SATTHIN::MAKEGVALS	0	0	1	0
►	W3FS21	0	0	1	1
►	BINARY_FILE.Utility::OPEN_BINARY_FILE	0.025	0.012	1	3
►	INITIALIZE::INITIALIZE_RTM	0.099	0.001	1	2
█	GUESS_GRIDS::CREATE_SFC_GRIDS	0	0	1	0
►	M_FVANAGRID::ALLGETLIST_	30.582	0	1	10
█	ERROR_HANDLER::DISPLAY_MESSAGE	0	0	1	0
█	JFUNC::SET_POINTER	0	0	1	0
█	OZINFO::OZINFO_READ	0.016	0.016	1	0
█	DETER_SUBDOMAIN	0.008	0.008	1	0
█	GRIDMOD::CREATE_MAPPING	0.005	0.005	1	0
█	INIT_COMMVARS	0.004	0.004	1	0
►	M_FVANAGRID::ALLGETLIST_	10.711	0	1	1
█	GRIDMOD::CREATE_GRID_VARS	0	0	1	0

# ParaProf - Callpath Thread Relations Window

Call Path Data n,c,t, 0,0,0 – comp.ppk/

Metric Name: Time  
Sorted By: Exclusive  
Units: seconds

Exclusive	Inclusive	Calls/Tot.Calls	Name[id]
0.023	0.023	3/430	COMPUTE_DERIVED[55]
2.02	2.02	104/430	DPRODXMOD::DPRODX[66]
0.33	0.33	104/430	INTALLMOD::INTALL[1708]
0.003	0.003	1/430	M_FVANAGRID::ALLGETLIST_[1773]
1.639	1.639	1/430	OBS_PARA[1802]
3725.802	3725.802	3/430	READ_OBS[1860]
214.294	214.294	6/430	SETUPRHSALL[1900]
20.069	20.069	208/430	STPCALCMOD::STPCALC[1942]
--> 3964.18	3964.18	430	<b>MPI_Allreduce() [1762]</b>
2.6E-4	30.582	1/15	GLBSOI[93]
0.007	0.036	1/15	GSI[107]
2.7E-4	10.711	1/15	GSISUB[1690]
31.273	1347.703	3/15	M_FVANAGRID::ALLGETLIST_[1773]
0.412	0.412	1/15	PREWTG[1831]
70.198	1406.389	4/15	READ_GUESS[1857]
0.952	0.952	3/15	SATTINN::GETSFC_GLOBAL[1882]
86.937	95.933	1/15	WRITE_ALL[2004]
--> 196.61	1575.595	15	<b>M_FVANAGRID::ALLGETLIST_[1773]</b>
6.2E-5	6.2E-5	1/1	BALMOD::CREATE_BALANCE_VARS[7]
4.6E-5	4.6E-5	1/1	BALMOD::DESTROY_BALANCE_VARS[8]
3.494	3.494	1/1	BALMOD::PREBAL[9]
0.017	0.017	1/1	BERROR::CREATE_BERROR_VARS[11]
2.0E-4	2.0E-4	1/1	BERROR::DESTROY_BERROR_VARS[12]
8.6E-5	8.6E-5	1/1	BERROR::SET_PREDICTORS_VAR[16]
5.7E-5	5.7E-5	1/1	COMPACT_DIFFS::CREATE_CDIFF_COEFS[34]
4.9E-5	4.9E-5	1/1	COMPACT_DIFFS::DESTROY_CDIFF_COEFS[35]
0.015	0.042	1/1	COMPACT_DIFFS::INISPHE[41]
0.052	8.196	3/3	COMPUTE_DERIVED[55]
1.4E-4	3.1E-4	3/3	GETLIST::MOVDATE_[89]
4.2E-5	4.2E-5	1/1	GRIDMOD::DESTROY_GRID_VARS[98]
8.2E-5	8.2E-5	1/1	GRIDMOD::DESTROY_MAPPING[99]
0.169	0.169	3/3	GUESS_GRIDS::CREATE_ATM_GRIDS[1692]
3.3E-4	3.3E-4	3/3	GUESS_GRIDS::DESTROY_ATM_GRIDS[1695]
9.1E-5	9.1E-5	1/1	GUESS_GRIDS::DESTROY_GES_BIAS_GRIDS[1696]
2.2E-4	2.2E-4	1/1	GUESS_GRIDS::DESTROY_SPC_GRIDS[1697]
6.6E-5	6.4E-4	1/1	INITIALIZE::DESTROY_RTM[1705]
5.8E-5	5.8E-5	1/1	JFUNC::DESTROY_JFUNC[1739]
<b>0.003</b>	<b>0.003</b>	<b>1/430</b>	<b>MPI_Allreduce() [1762]</b>
0.017	0.017	68/116	MPI_Bcast() [1764]
0.004	0.004	297/409	MPI_Comm_rank() [1765]

Parent

Routine

Children



# ParaProf – Manager Window


The screenshot illustrates the TAU ParaProf Manager interface. On the left, a tree view labeled "performance database" shows a hierarchy of application profiles. A specific entry under "DB (jdbc:derby:/databases/perfdmf)" is highlighted. On the right, a table labeled "metadata" displays various experimental parameters. Below the main window, a smaller dialog box titled "Load Trial" is open, showing a dropdown menu for "Trial Type" with "Tau profiles" selected.

**Performance Database Tree:**


- Standard Applications
  - Default App
  - DB (jdbc:derby:/databases/perfdmf)
    - LAMMPS - 10Nov05 - Eagle
      - Henz AuSAM Hybrid - 2818 - 100 iterations - Profile
      - Henz AuSAM Hybrid - 2818 - 1000 iterations - Profile
      - TI-06 Large - 108M - 1350 iterations - PAPI Profile
        - 64 CPU
          - PAPI\_RES\_STL
          - PAPI\_BR\_MSP
          - PAPI\_FP\_OPS
        - TI-06 Large - 108M - 1350 iterations - Profile
        - TI-06 Standard - 32k - 100 iterations - PAPI Profile
        - TI-06 Standard - 32k - 135000 iterations - PAPI Profile
        - TI-06 Standard - 32k - 135000 iterations - Profile
      - LAMMPS - 10Nov05 - JVN
        - Henz AuSAM Hybrid - 2818 - 1000 iterations - Profile
        - TI-06 Large - 108M - 1350 iterations - Profile
        - TI-06 Standard - 32k - 135000 iterations - Callpath Profile
        - TI-06 Standard - 32k - 135000 iterations - Profile
      - LAMMPS - 12Feb07 - JVN
        - in.eam - 32k - 1000 iterations - Callpath Profile
        - in.eam - 32k - 1000 iterations - Callpath Profile - Optimized
        - in.eam - 32k - 1000 iterations - Compensated Profile
        - in.eam - 32k - 1000 iterations - Compensated Profile - Optimized
        - in.eam - 32k - 1000 iterations - Profile - Optimized
        - in.lj - 32k - 1000 iterations - Callpath Profile
        - in.lj - 32k - 1000 iterations - Callpath Profile - Optimized
        - in.lj - 32k - 1000 iterations - Compensated Profile
        - in.lj - 32k - 1000 iterations - Compensated Profile - Optimized
        - in.lj - 32k - 1000 iterations - Profile - Optimized
        - in.rhodo - 32k - 1000 iterations - Callpath Profile
        - in.rhodo - 32k - 1000 iterations - Callpath Profile - Optimized
        - in.rhodo - 32k - 1000 iterations - Profile
          - 1 CPU
          - 2
          - 4 CPU
          - 8 CPU
          - 16 CPU
          - 32 CPU
          - 64 CPU
            - Time
          - in.rhodo - 32k - 1000 iterations - Profile - Optimized
        - LAMMPS - 17Jul06 - JVN
          - Henz AuSAM Hybrid - 9383 - 100 iterations - Callpath Profile
          - Henz AuSAM Hybrid - 9383 - 100 iterations - Compensated Profile
          - Henz AuSAM Hybrid - 9383 - 100 iterations - Profile

ParaTools


# Performance Database: Storage of MetaData

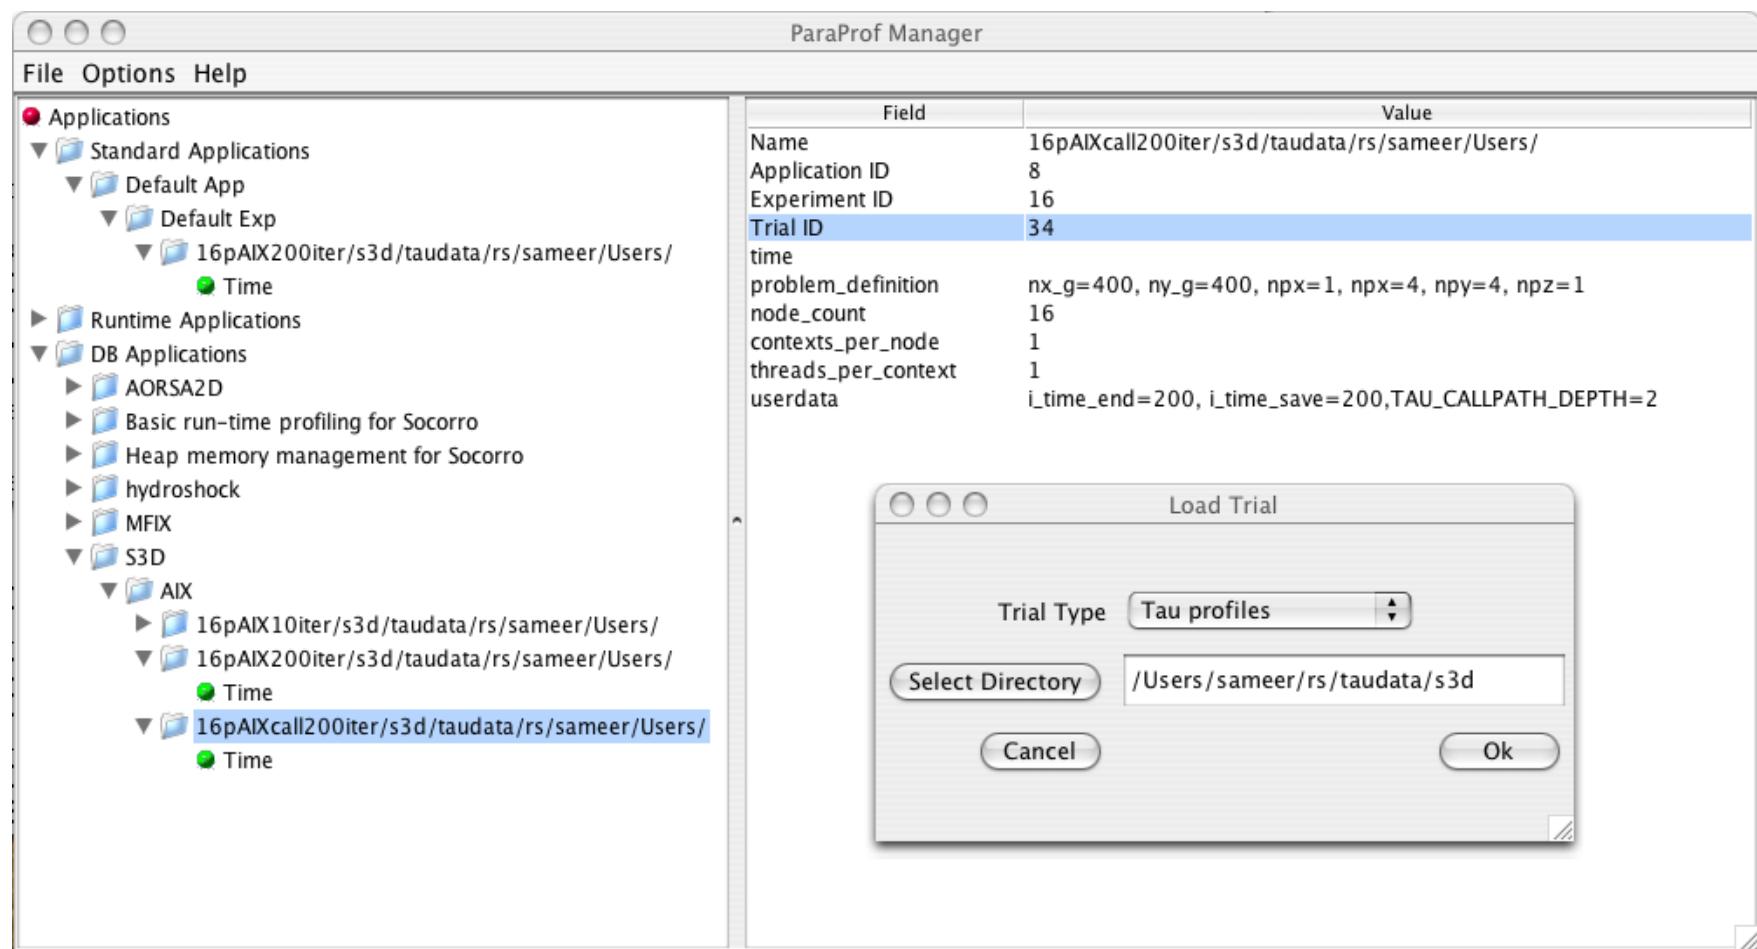



# ParaProf Main Window (Lammps)

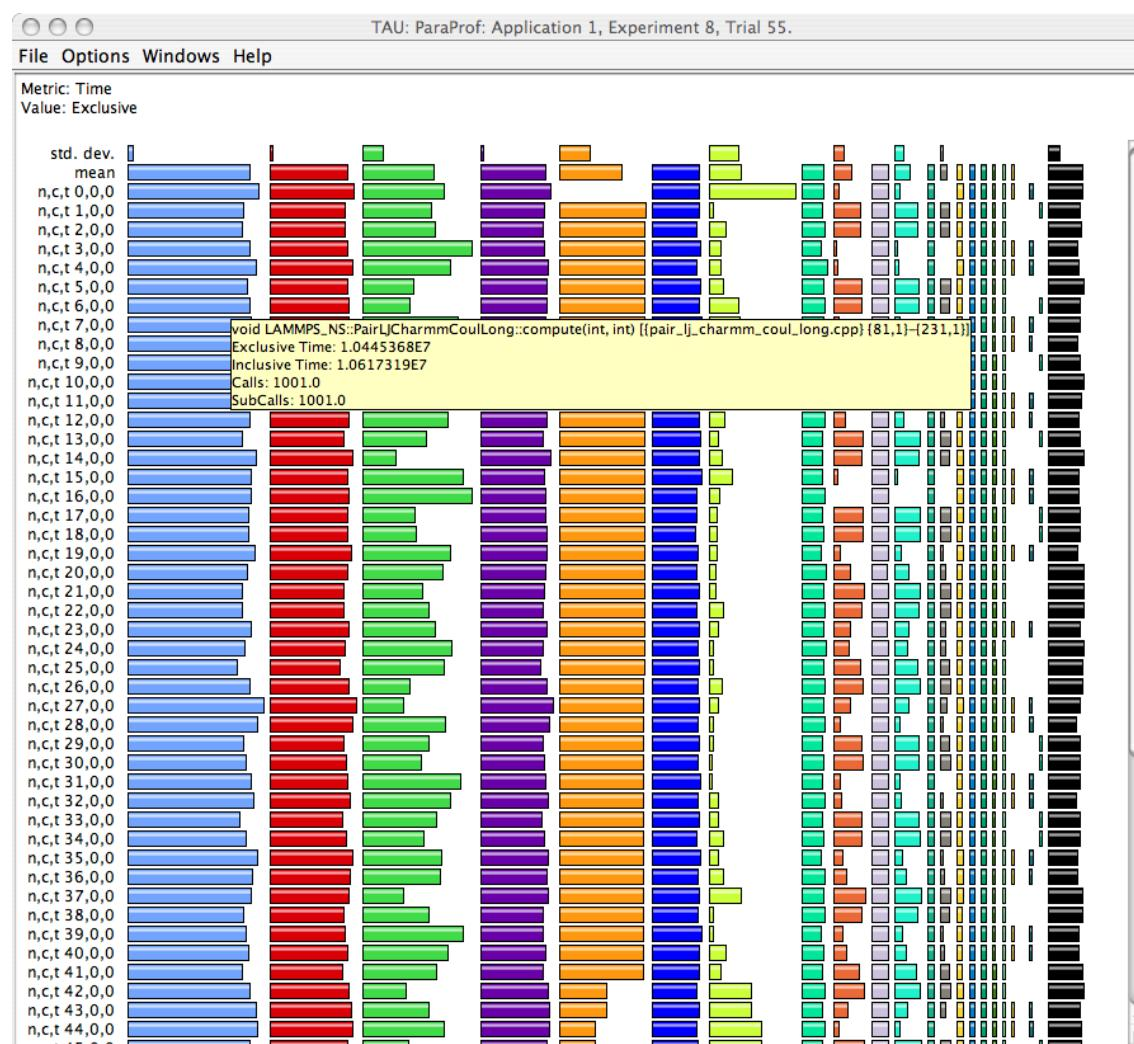

# ParaProf – Flat Profile (Miranda)

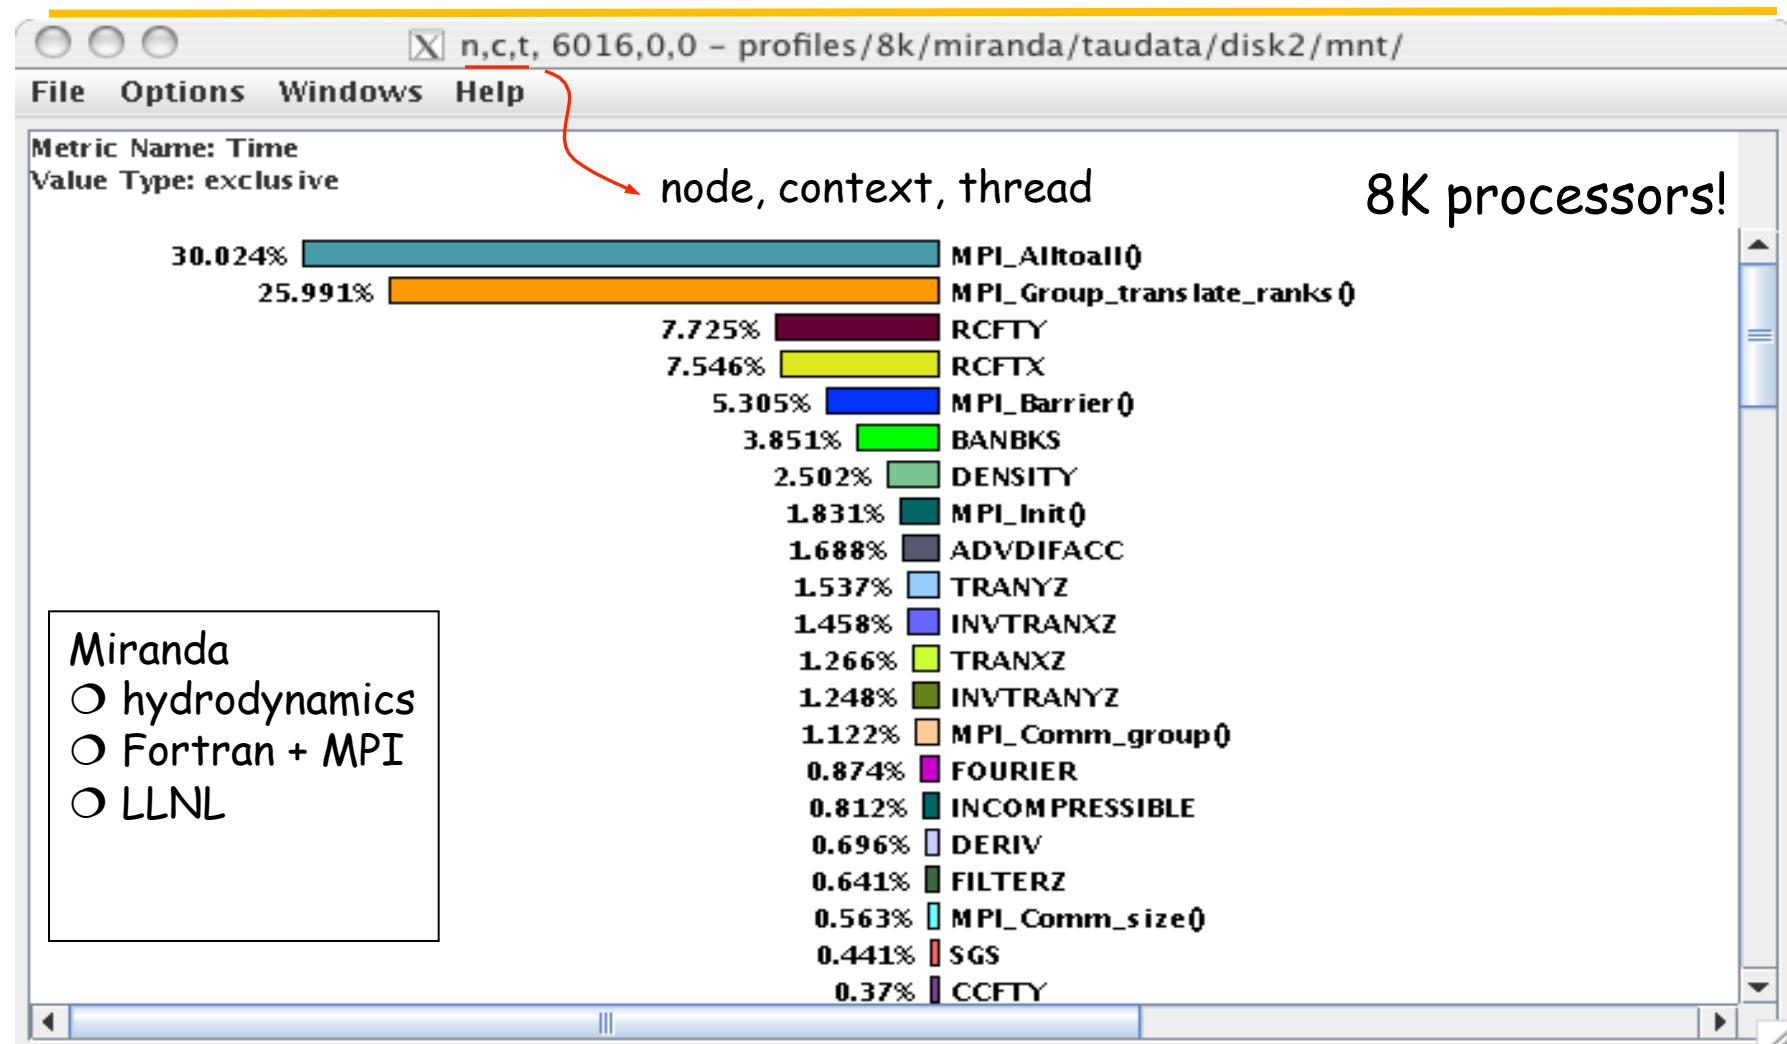

# ParaProf – Histogram View (Miranda)

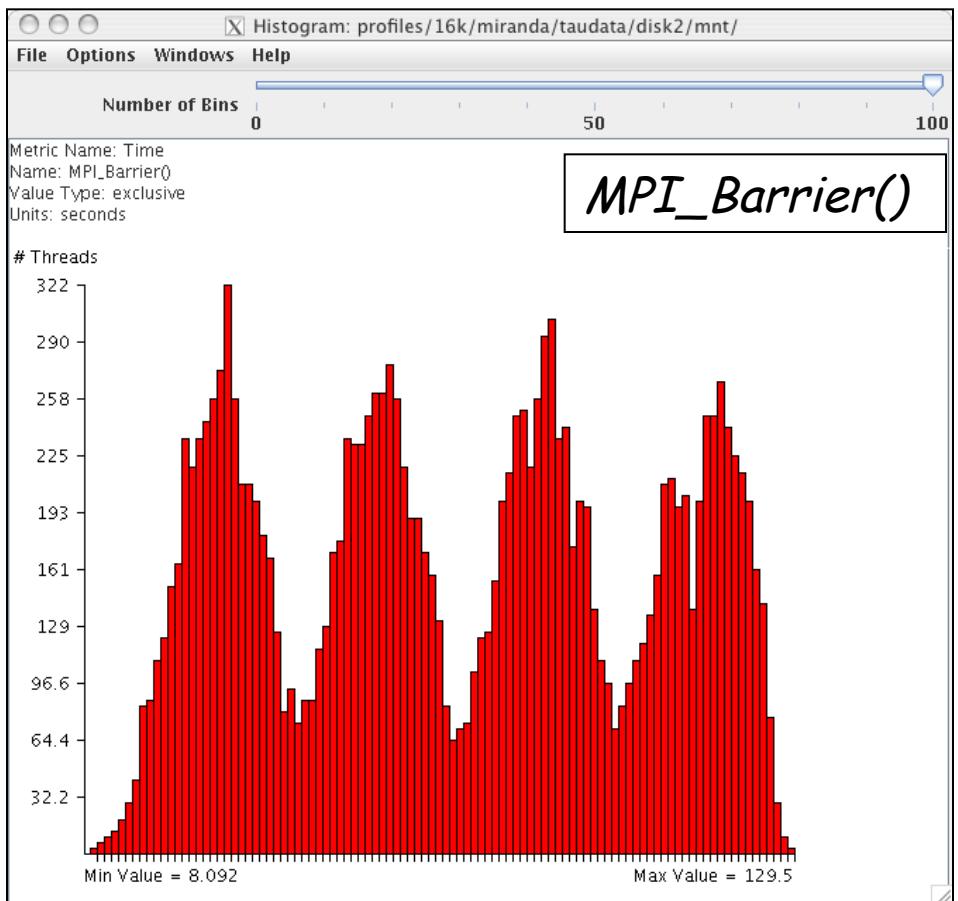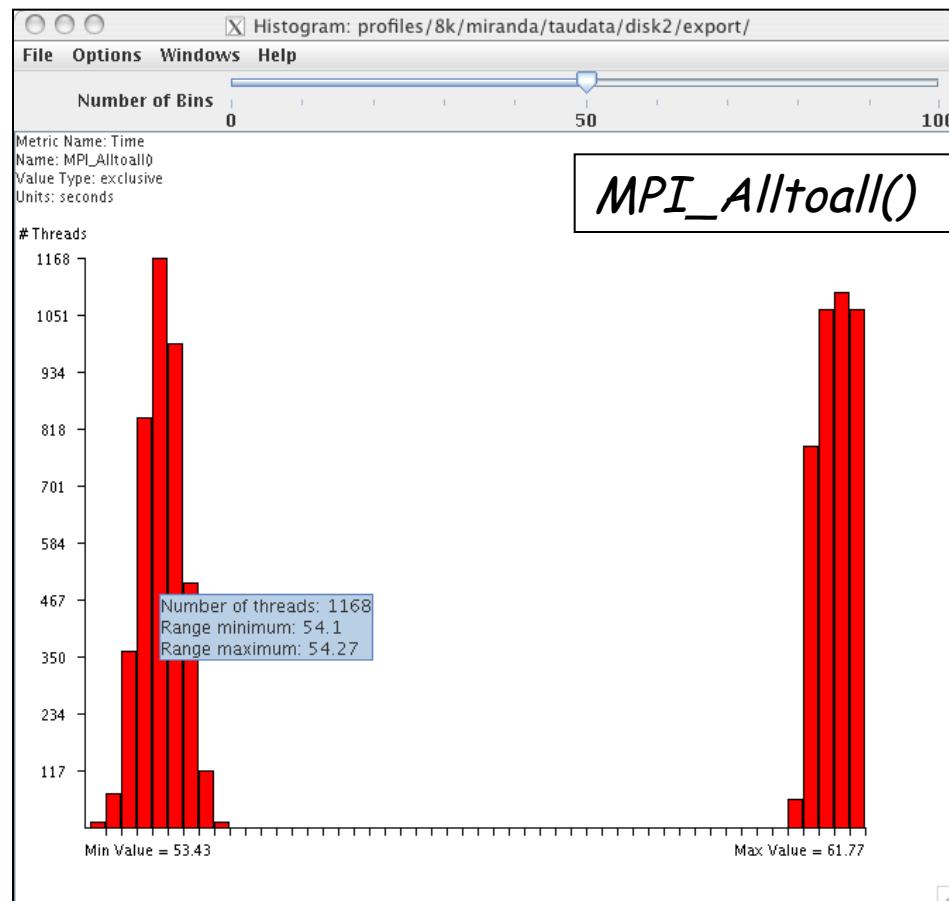

8k processors

16k processors

# Using Performance Database (PerfDMF)

---

- Configure PerfDMF (Done by each user)

```
% perfmdmf_configure --create-default
```

- Choose derby, PostgreSQL, MySQL, Oracle or DB2
- Hostname
- Username
- Password
- Say yes to downloading required drivers (we are not allowed to distribute these)
- Stores parameters in your ~/.ParaProf/perfmdmf.cfg file

- Configure PerfExplorer (Done by each user)

```
% perfexplorer_configure
```

- Execute PerfExplorer

```
% perfexplorer
```

# PerfDMF and the TAU Portal

---

- Development of the TAU portal
  - Common repository for collaborative data sharing
  - Profile uploading, downloading, user management
  - Paraprof, PerfExplorer can be launched from the portal using Java Web Start (no TAU installation required)
- Portal URL

<http://tau.nic.uoregon.edu>

# Performance Data Mining (PerfExplorer)

---


- Performance knowledge discovery framework
  - Data mining analysis applied to parallel performance data
    - comparative, clustering, correlation, dimension reduction, ...
  - Use the existing TAU infrastructure
    - TAU performance profiles, PerfDMF
    - Client-server based system architecture
- Technology integration
  - Java API and toolkit for portability
  - PerfDMF
  - R-project/Omegahat, Octave/Matlab statistical analysis
  - WEKA data mining package
  - JFreeChart for visualization, vector output (EPS, SVG)

# PerfExplorer - Cluster Analysis

---


- Performance data represented as vectors - each dimension is the cumulative time for an event
- $k$ -means:  $k$  random centers are selected and instances are grouped with the "closest" (Euclidean) center
- New centers are calculated and the process repeated until stabilization or max iterations
- Dimension reduction necessary for meaningful results
- Virtual topology, summaries constructed

# PerfExplorer - Cluster Analysis (sPPM)

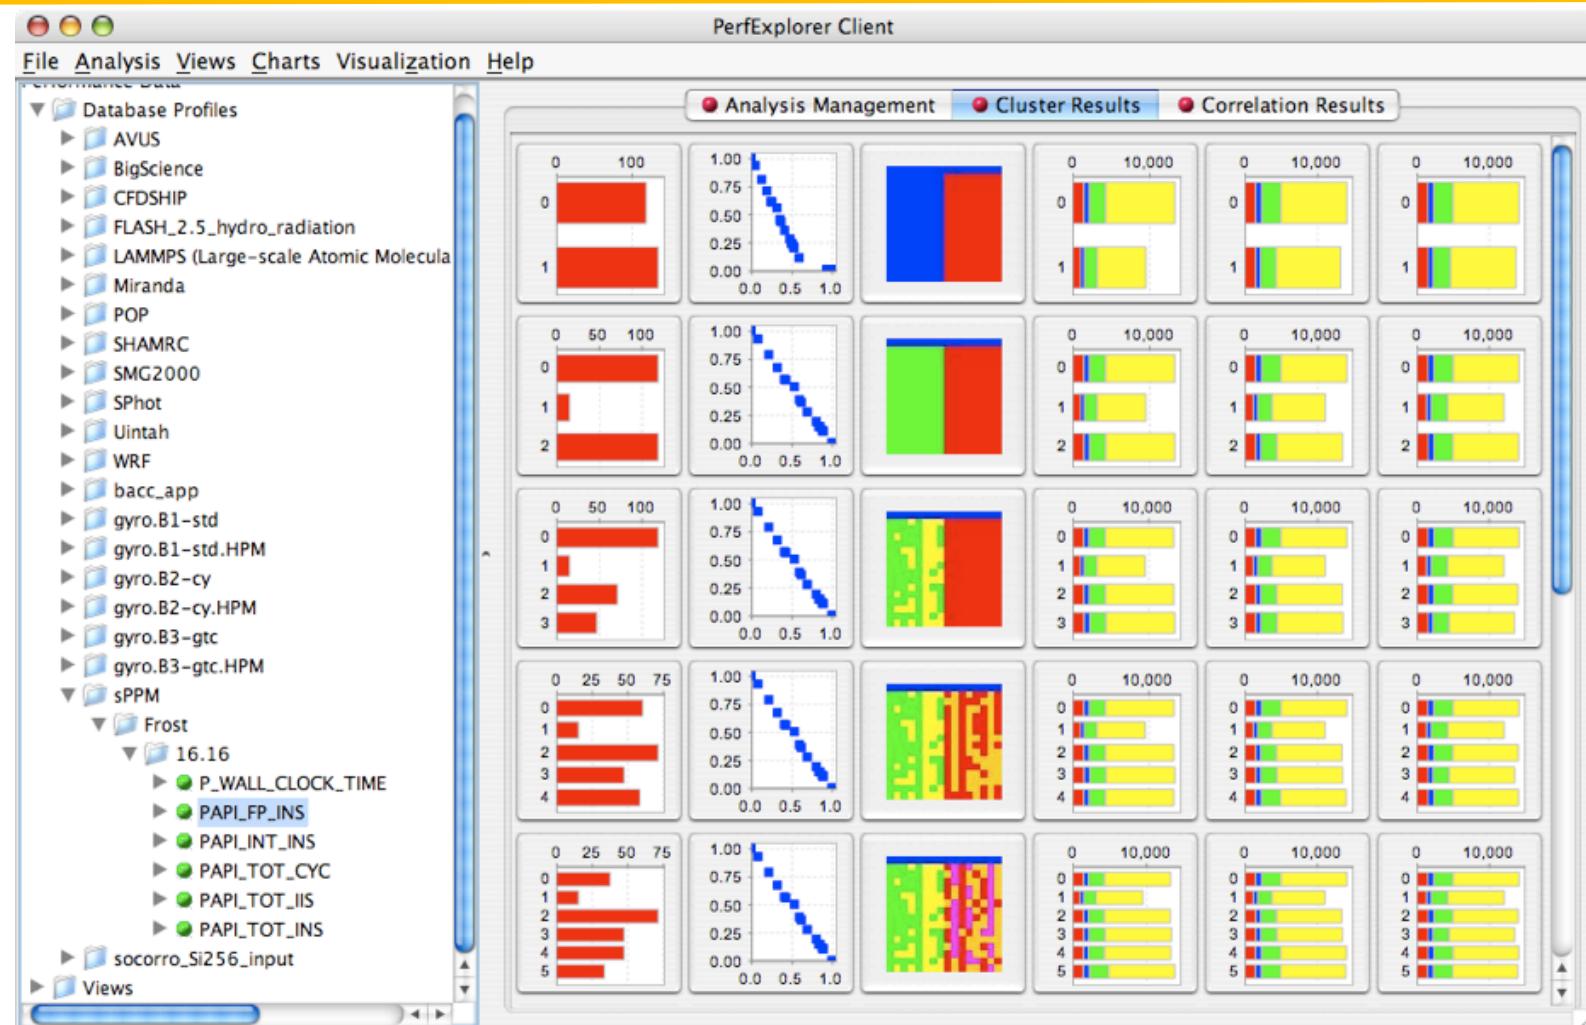


# PerfExplorer - Correlation Analysis (Flash)

- Describes strength and direction of a linear relationship between two variables (events) in the data

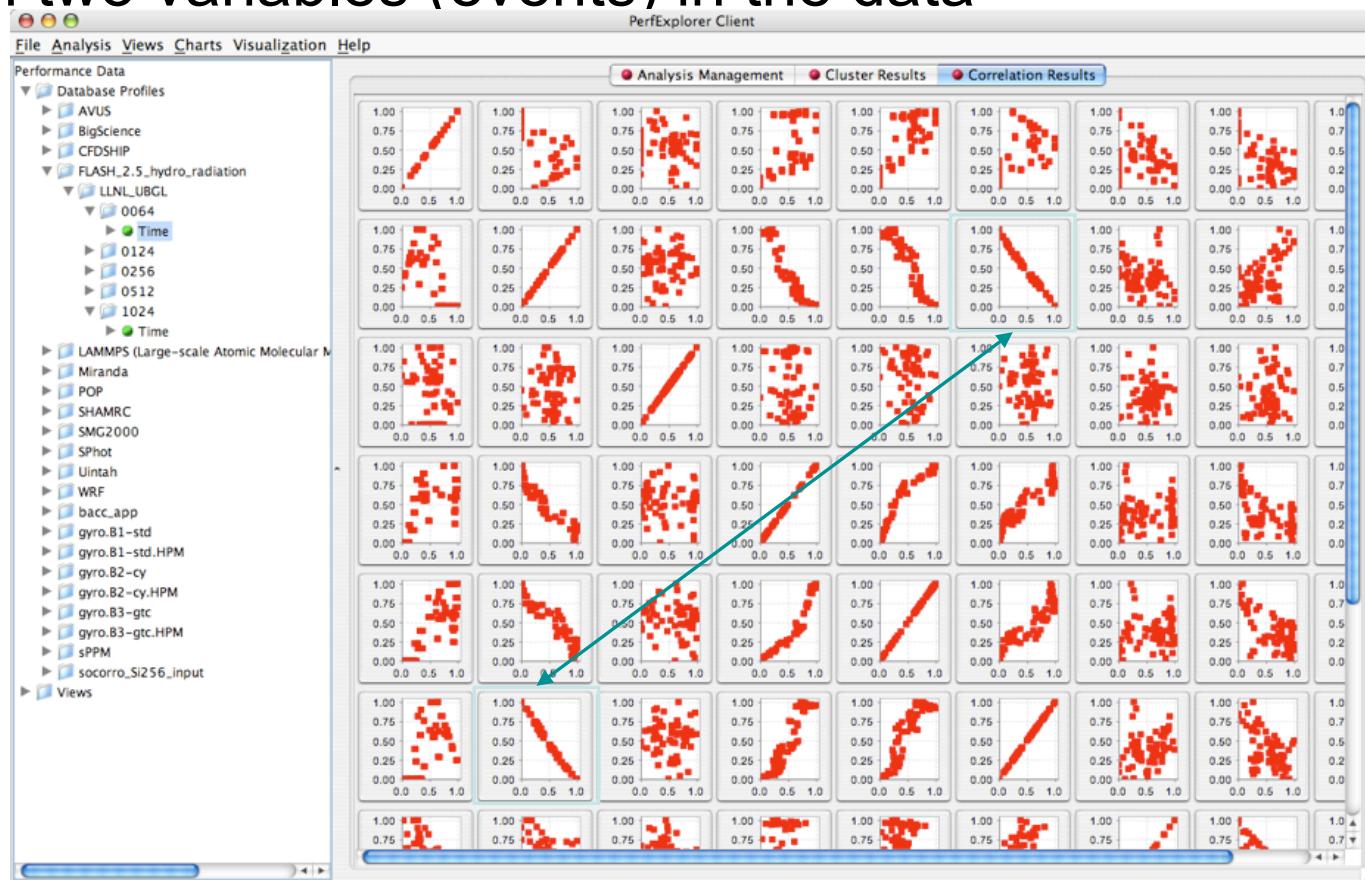

# PerfExplorer - Correlation Analysis (Flash)

- -0.995 indicates strong, negative relationship
- As CALC\_CUT\_BLOCK\_CONTRIBUTIONS() increases in execution time, MPI\_Barrier() decreases

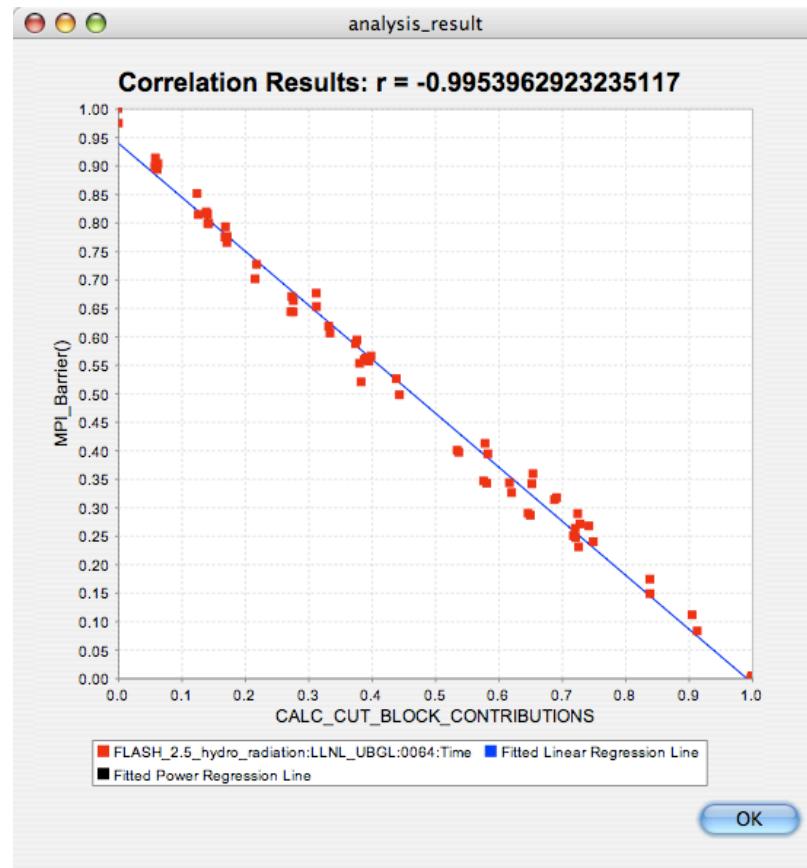

# PerfExplorer - Comparative Analysis

---

- Relative speedup, efficiency
  - total runtime, by event, one event, by phase
- Breakdown of total runtime
- Group fraction of total runtime
- Correlating events to total runtime
- Timesteps per second
- Performance Evaluation Research Center (PERC)
  - PERC tools study (led by ORNL, Pat Worley)
  - In-depth performance analysis of select applications
  - Evaluation performance analysis requirements
  - Test tool functionality and ease of use

# PerfExplorer - Interface

The screenshot shows the PerfExplorer Client interface. On the left is a file tree view:

- gyro.B1-std
  - B1-std-hwpc.phoenix.0x002
  - B1-std-inst.phoenix.0x002
  - B1-std-inst.phoenix.0x002.profil
  - B1-std-nl2.cheetah.affnosng
  - B1-std-nl2.cheetah.affsng
  - B1-std-nl2.cheetah.noaffnosng**
  - B1-std-nl2.phoenix.0x002
  - B1-std-nl2.phoenix.0x002scr
  - B1-std.53newest.phoenix.0x002**
  - B1-std.cheetah.affnosng
  - B1-std.cheetah.affsng
  - B1-std.cheetah.noaffnosng
  - B1-std.hockney
  - B1-std.new.phoenix.0x002
  - B1-std.phoenix.0x002
  - B1-std.phoenix.0x002scr**
  - B1-std.ram0x002.a
  - B1-std.ram0x002.b
- B1-std.seaborg**
  - B1-std.timing.seaborg.128
  - B1-std.timing.seaborg.16
  - B1-std.timing.seaborg.256
  - B1-std.timing.seaborg.32
  - B1-std.timing.seaborg.512
  - B1-std.timing.seaborg.64
  - B1-std.tg**
- gyro.B2-cy
- gyro.B3-gtc


On the right is an "Analysis Management" table:

Field	Value
Name	B1-std-nl2.cheetah.noaffnosng
Experiment ID	16
system_name	
system_machine_type	
system_arch	
system_os	
system_memory_size	
system_processor_amt	
system_l1_cache_size	
system_l2_cache_size	
system_userdata	
compiler_cpp_name	
compiler_cpp_version	
configure_prefix	
configure_arch	


Annotations:

- A red callout points to the file tree with the text: "Select experiments and trials of interest".
- A red callout points to the table with the text: "Experiment metadata".
- A red callout points to the bottom section of the interface with the text: "Data organized in application, experiment, trial structure (will allow arbitrary in future)".


# PerfExplorer - Interface

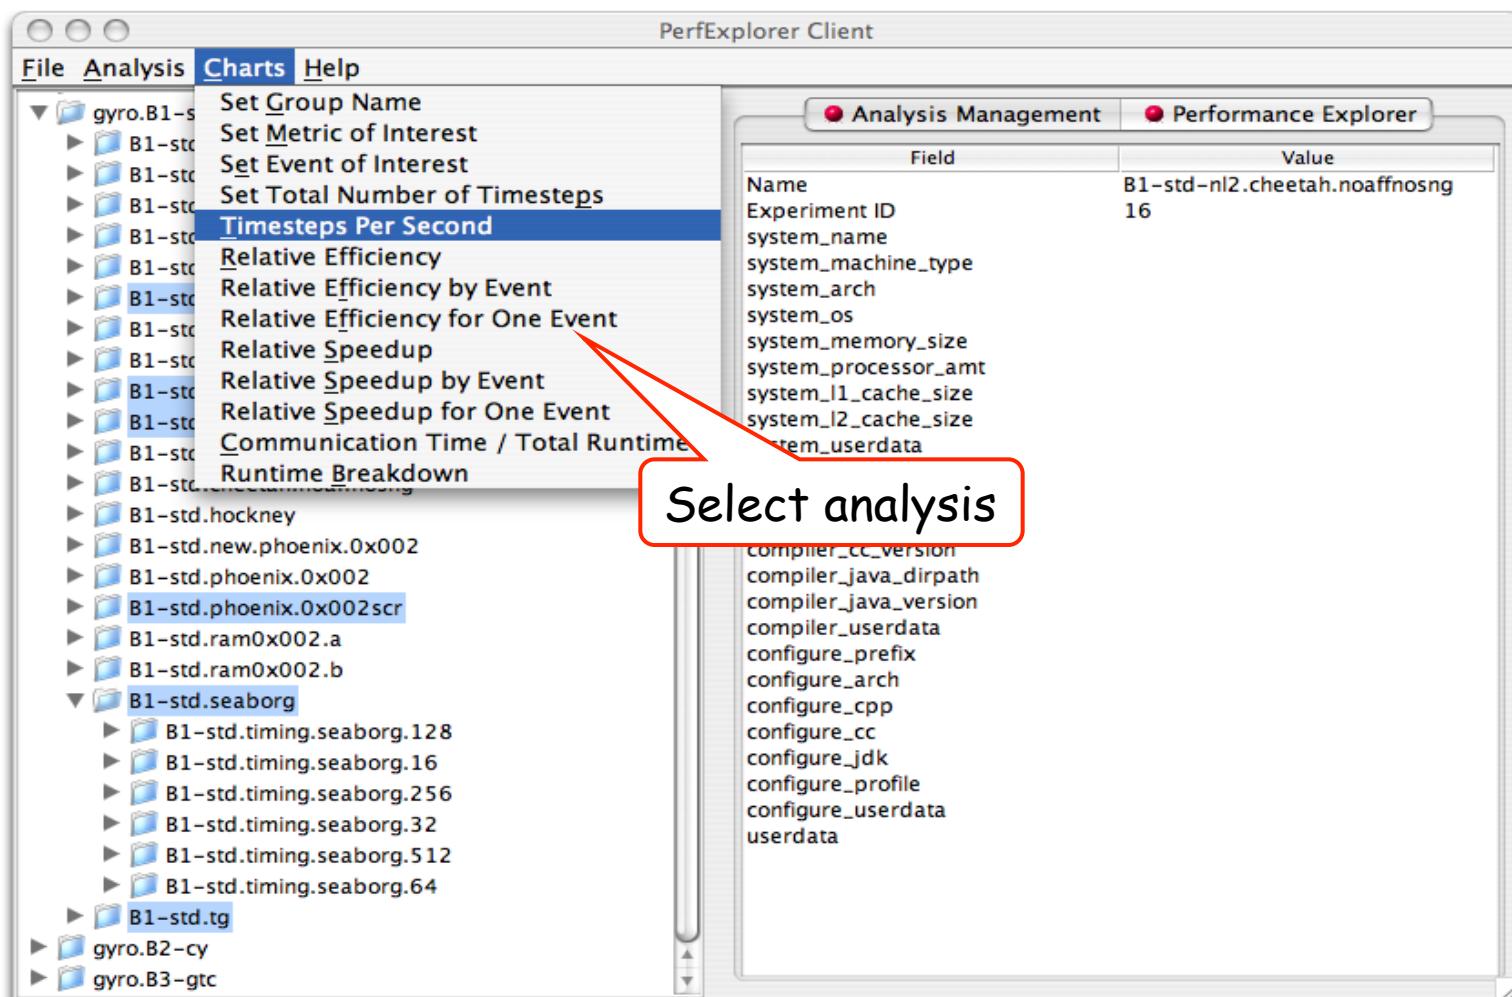


# PerfExplorer - Relative Efficiency Plots

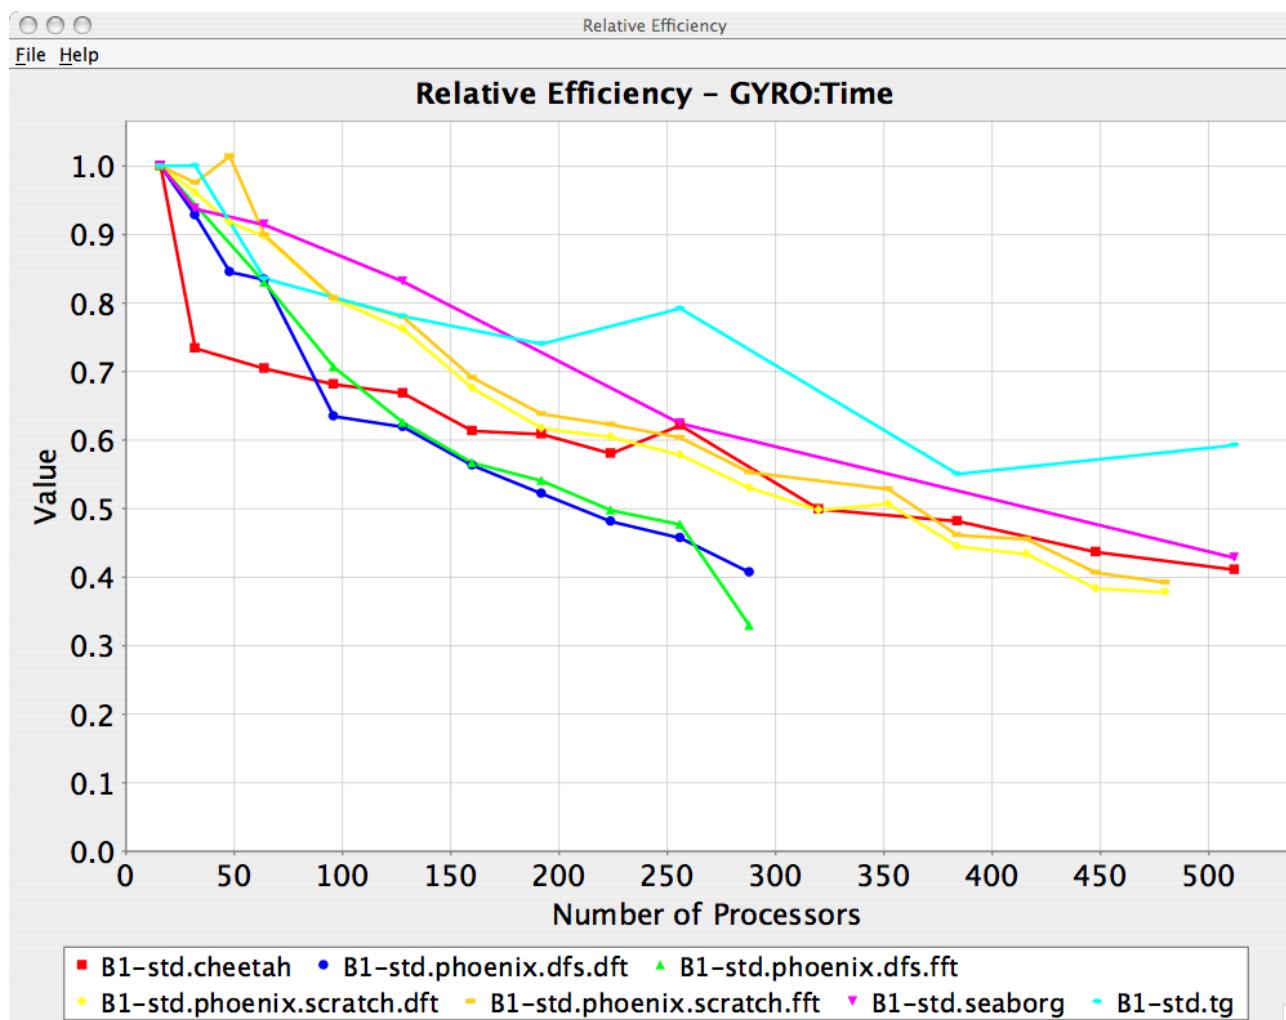


# PerfExplorer - Relative Efficiency by Routine

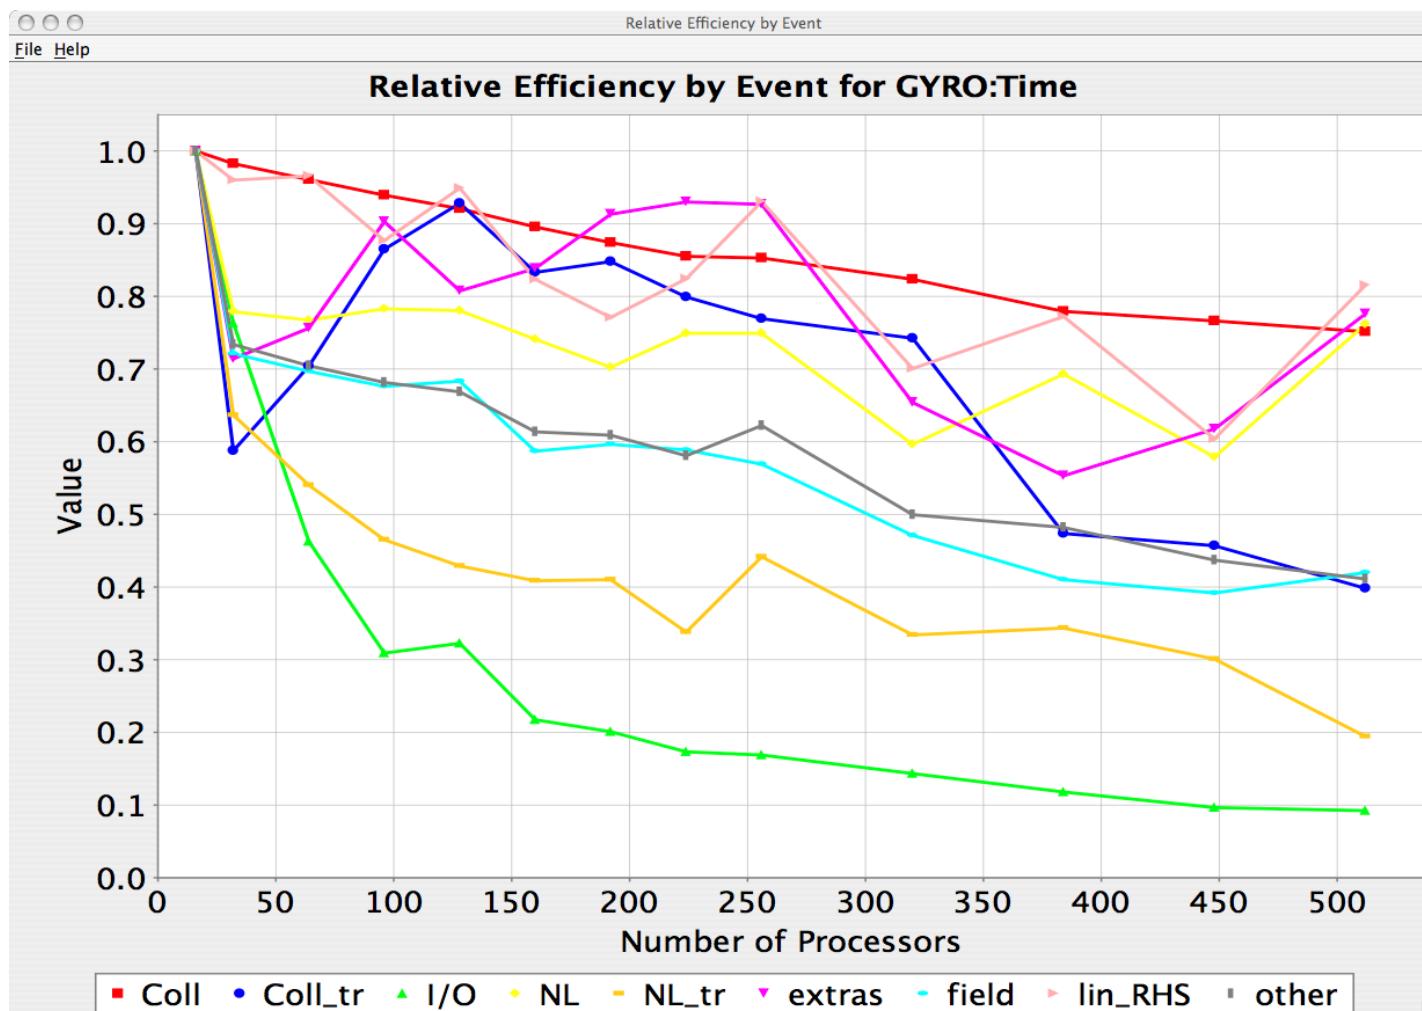

# PerfExplorer - Relative Speedup

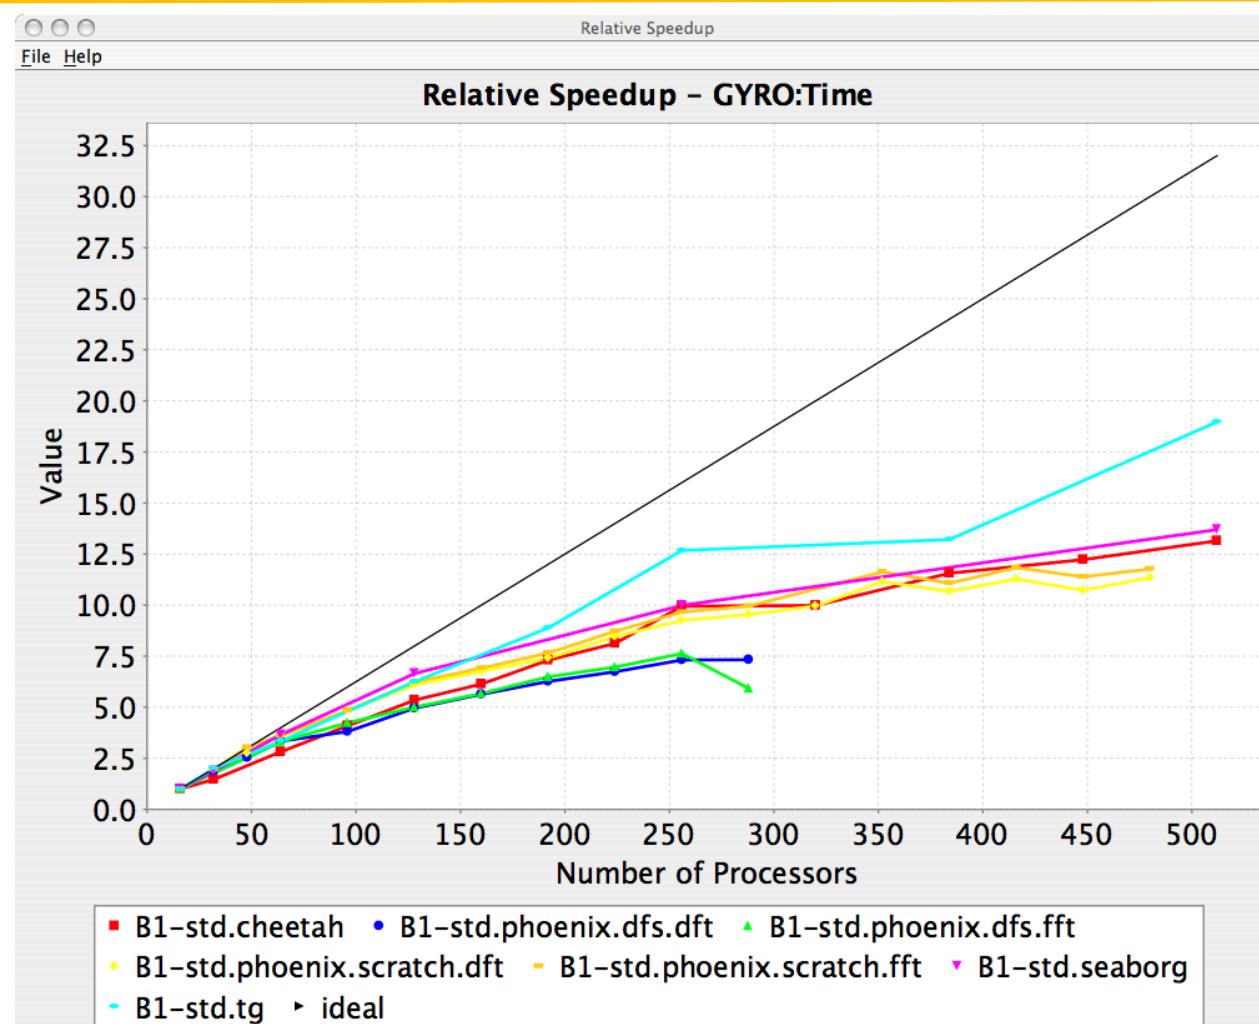


# PerfExplorer - Timesteps Per Second

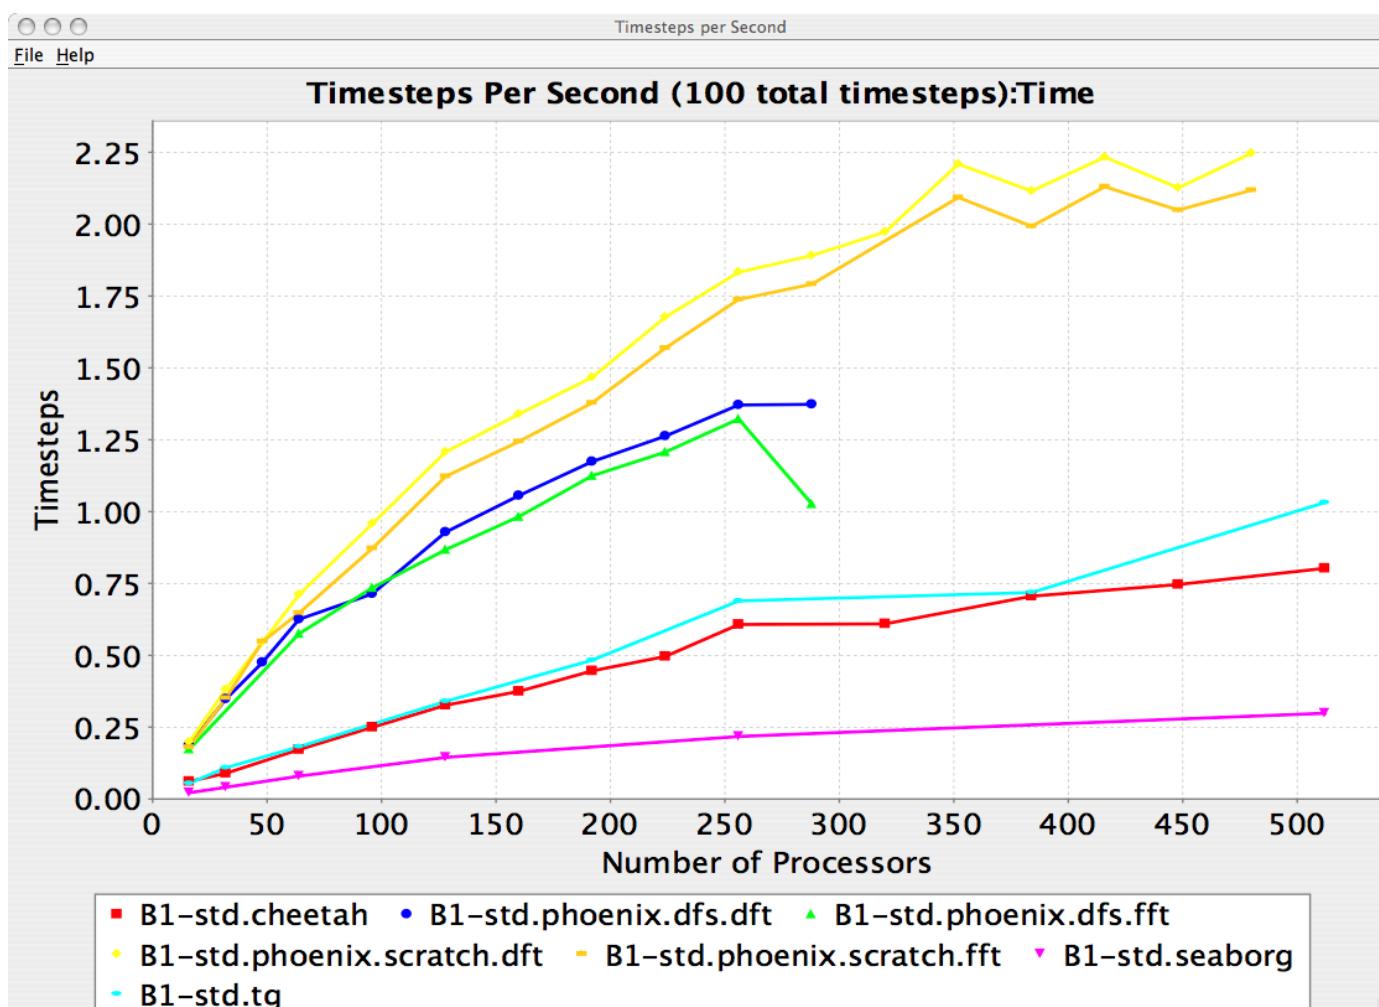


# Usage Scenarios: Evaluate Scalability


- Goal: How does my application scale? What bottlenecks occur at what core counts?
- Load profiles in PerfDMF database and examine with PerfExplorer

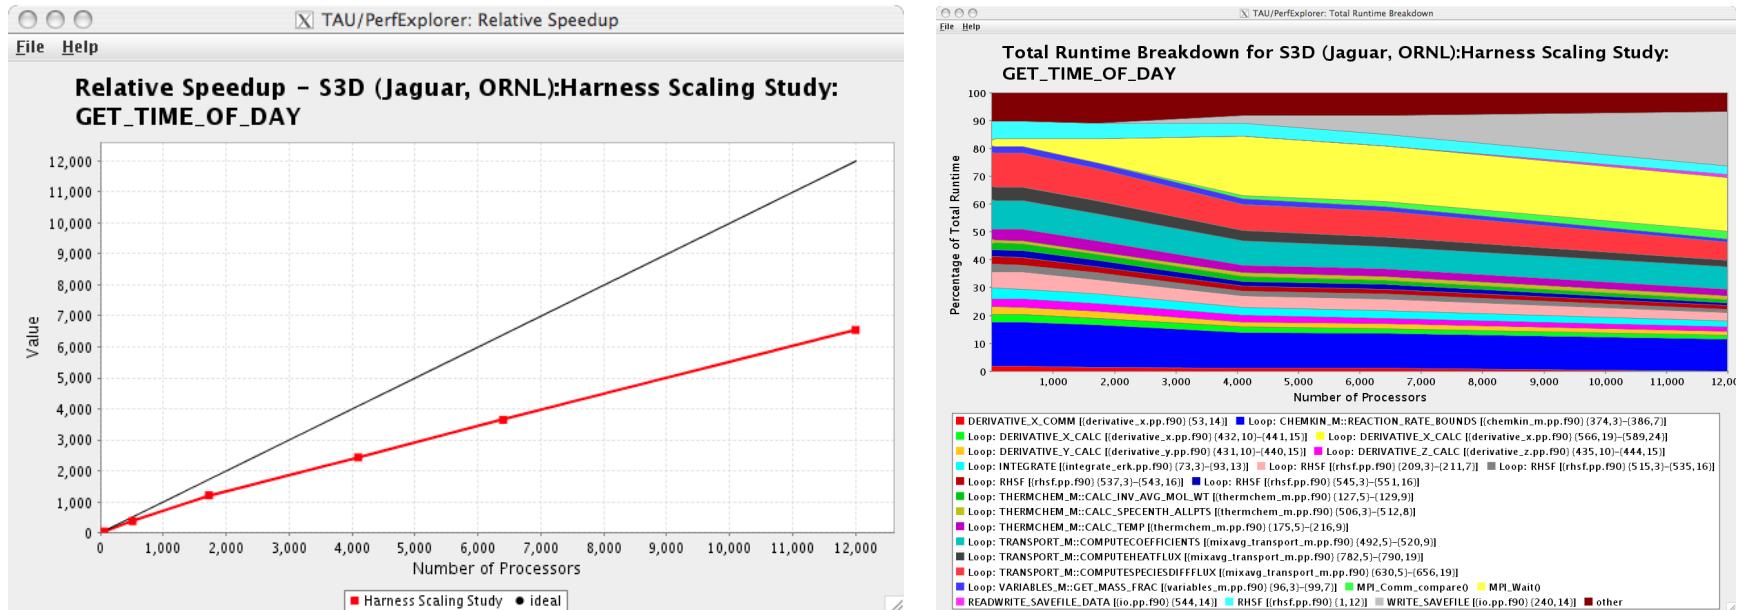

# Usage Scenarios: Evaluate Scalability

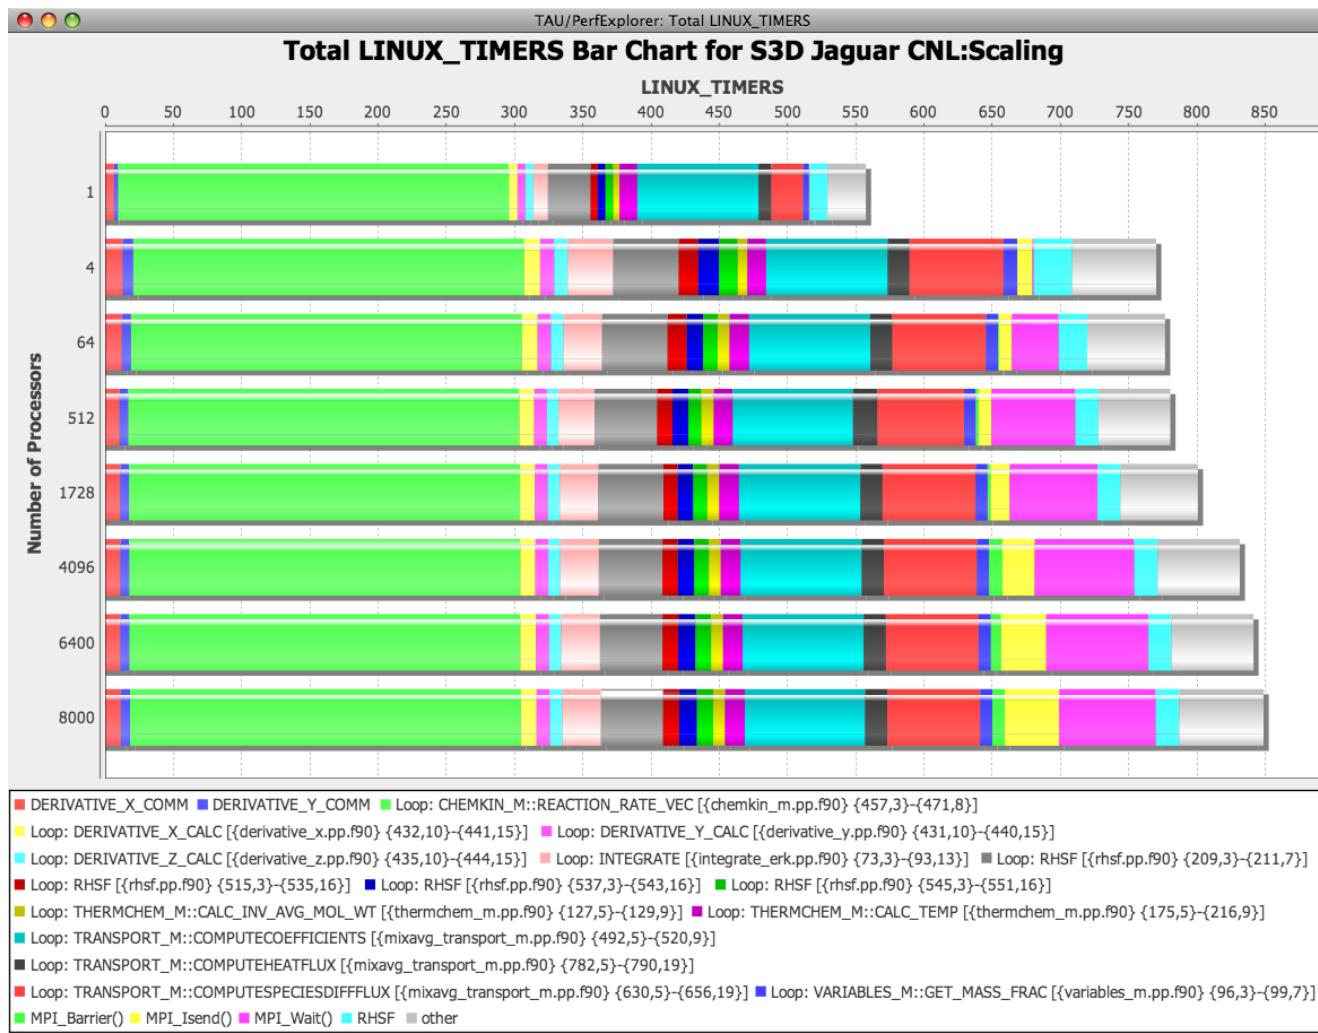

# Performance Regression Testing

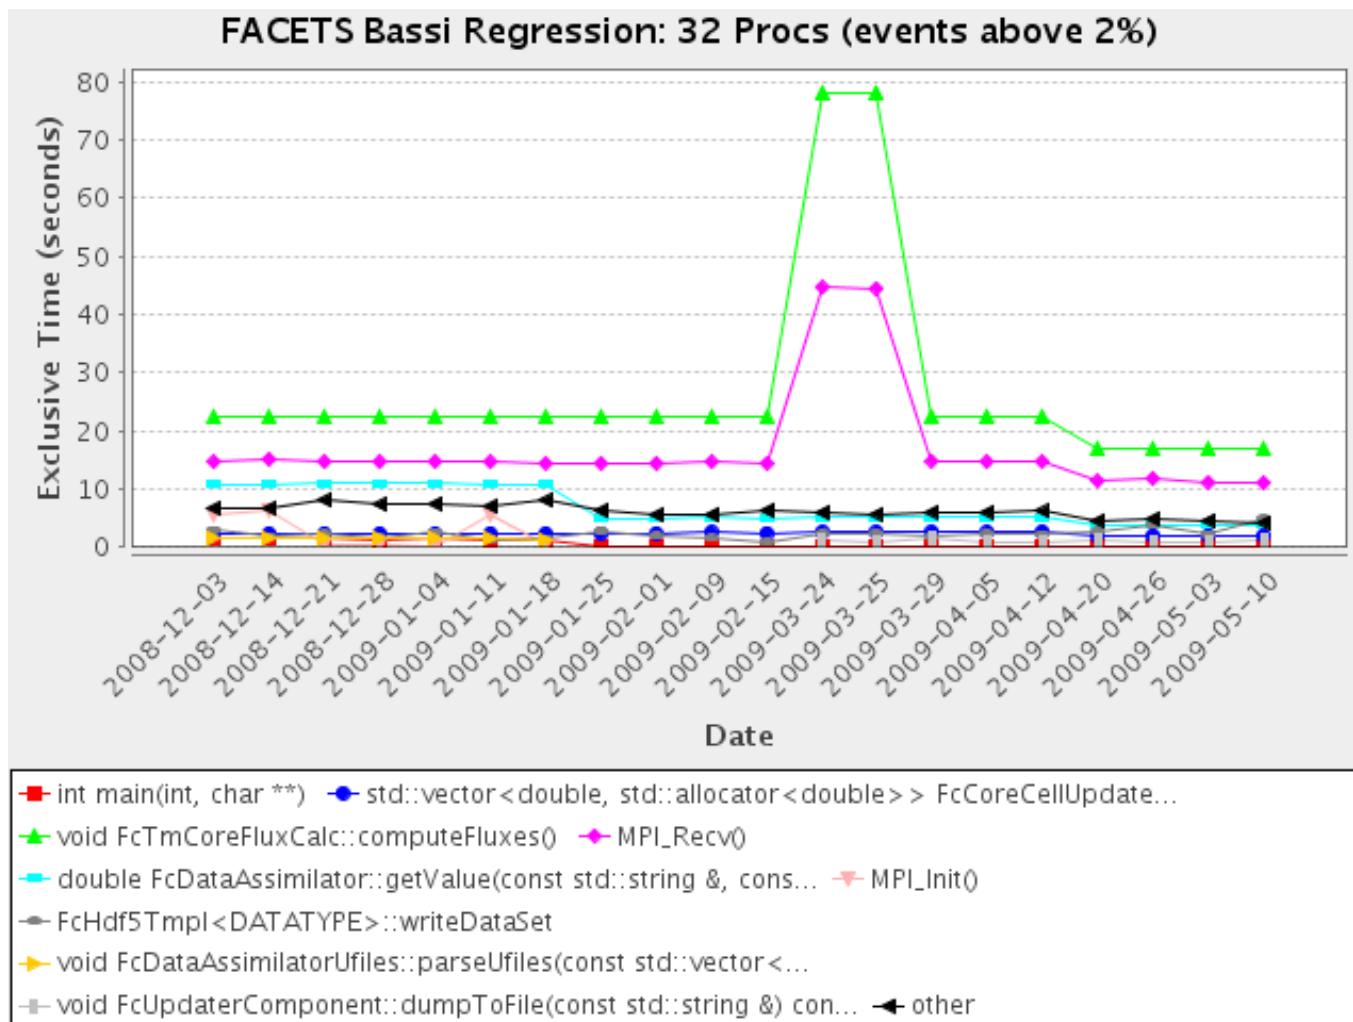


# Evaluate Scalability using PerfExplorer Charts

```
% export TAU_MAKEFILE=$TAU_ROOT  
                  /lib/Makefile.tau-mpi-pdt  
  
% export PATH=$TAU_ROOT/bin:$PATH  
  
% make F90=tau_f90.sh  
  
(Or edit Makefile and change F90=tau_f90.sh)  
  
% mpirun -np 1 ./a.out  
  
% paraprof --pack 1p.ppk  
  
% mpirun -np 2 ./a.out ...  
  
% paraprof --pack 2p.ppk ... and so on.  
  
On your client:  
  
% perfmdf_configure --create-default  
  
(Chooses derby, blank user/passwd, yes to save passwd, defaults)  
  
% perfexplorer_configure  
  
(Yes to load schema, defaults)  
  
% paraprof  
  
(load each trial: DB -> Add Trial -> Type (Paraprof Packed Profile) -> OK) OR use  
  perfmdf_loadtrial -a "app" -x "experiment" -n "name" file.ppk  
  
Then,  
  
% perfexplorer  
  
(Select experiment, Menu: Charts -> Speedup)
```

---

Throttling effect of frequently called  
small routines

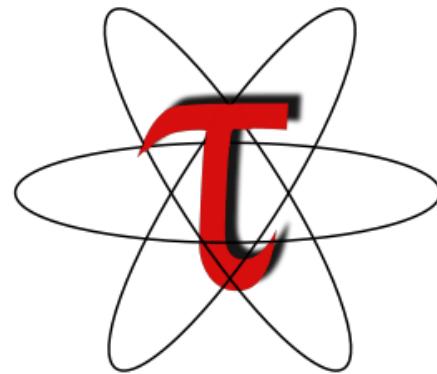

# Optimization of Program Instrumentation

---

- Need to eliminate instrumentation in frequently executing lightweight routines
- Throttling of events at runtime (default in tau-2.17.2+):

```
% export TAU_THROTTLE=1
```

Turns off instrumentation in routines that execute over 100000 times (TAU\_THROTTLE\_NUMCALLS) and take less than 10 microseconds of inclusive time per call (TAU\_THROTTLE\_PERCALL). Use TAU\_THROTTLE=0 to disable.

- Selective instrumentation file to filter events


```
% tau_instrumentor [options] -f <file> OR
```

```
% export TAU_OPTIONS='-optTauSelectFile=tau.txt'
```


- Compensation of local instrumentation overhead

```
% export TAU_COMPENSATE=1 (in tau-2.19.2+)
```

# ParaProf: Creating Selective Instrumentation File

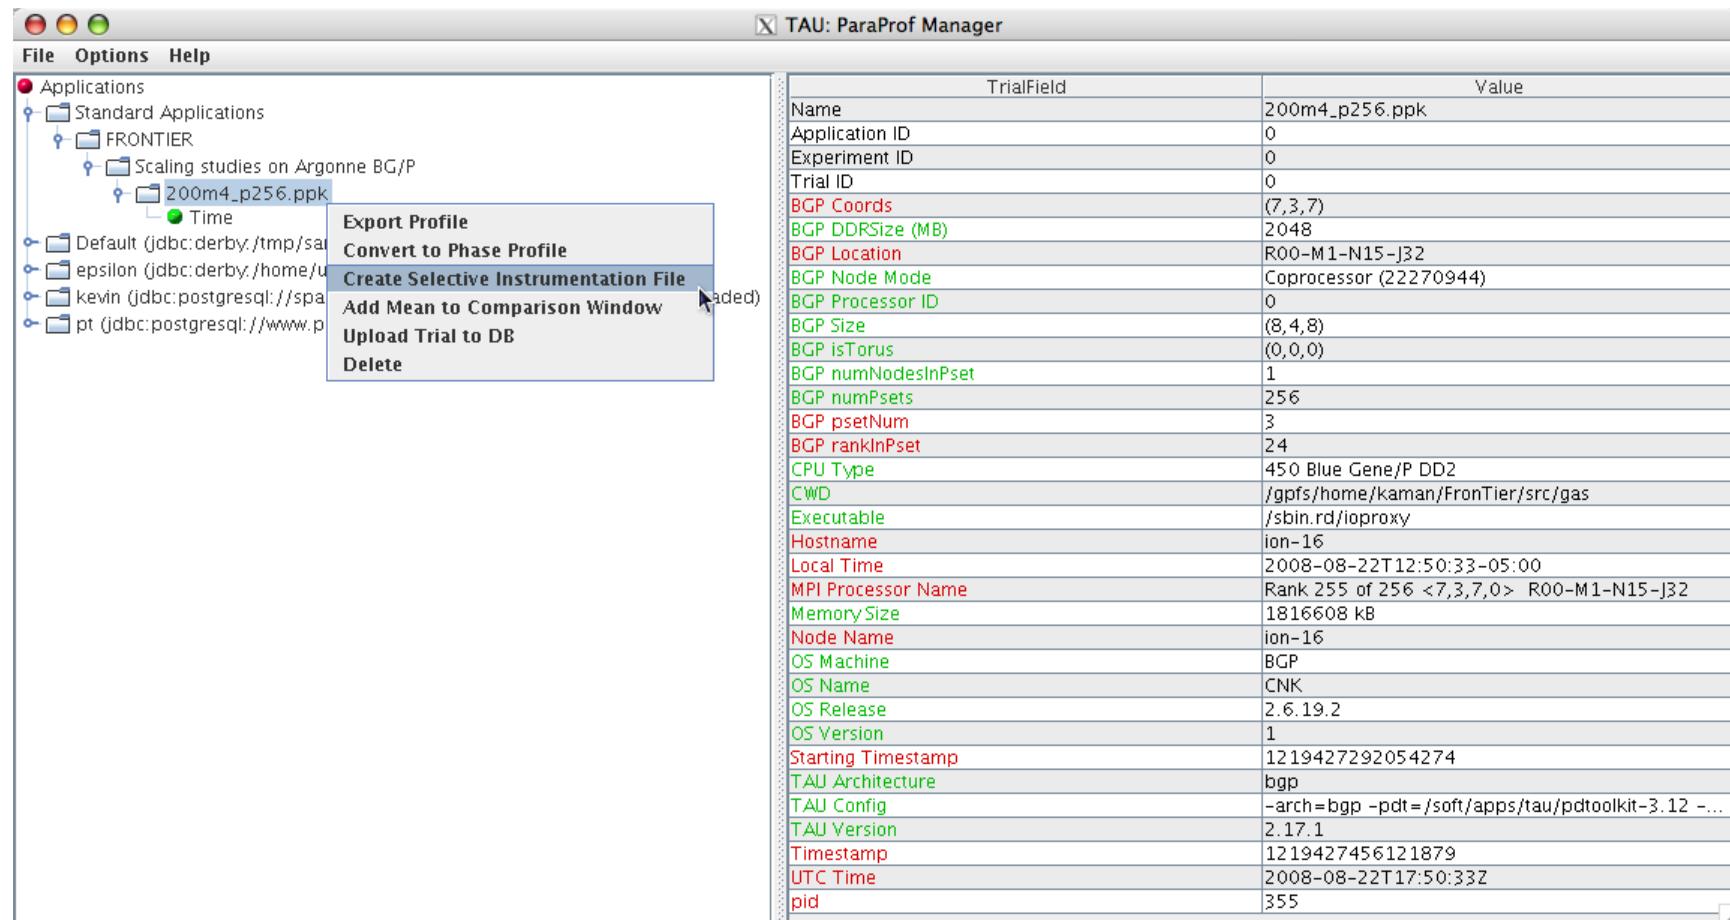


# Choosing Rules for Excluding Routines

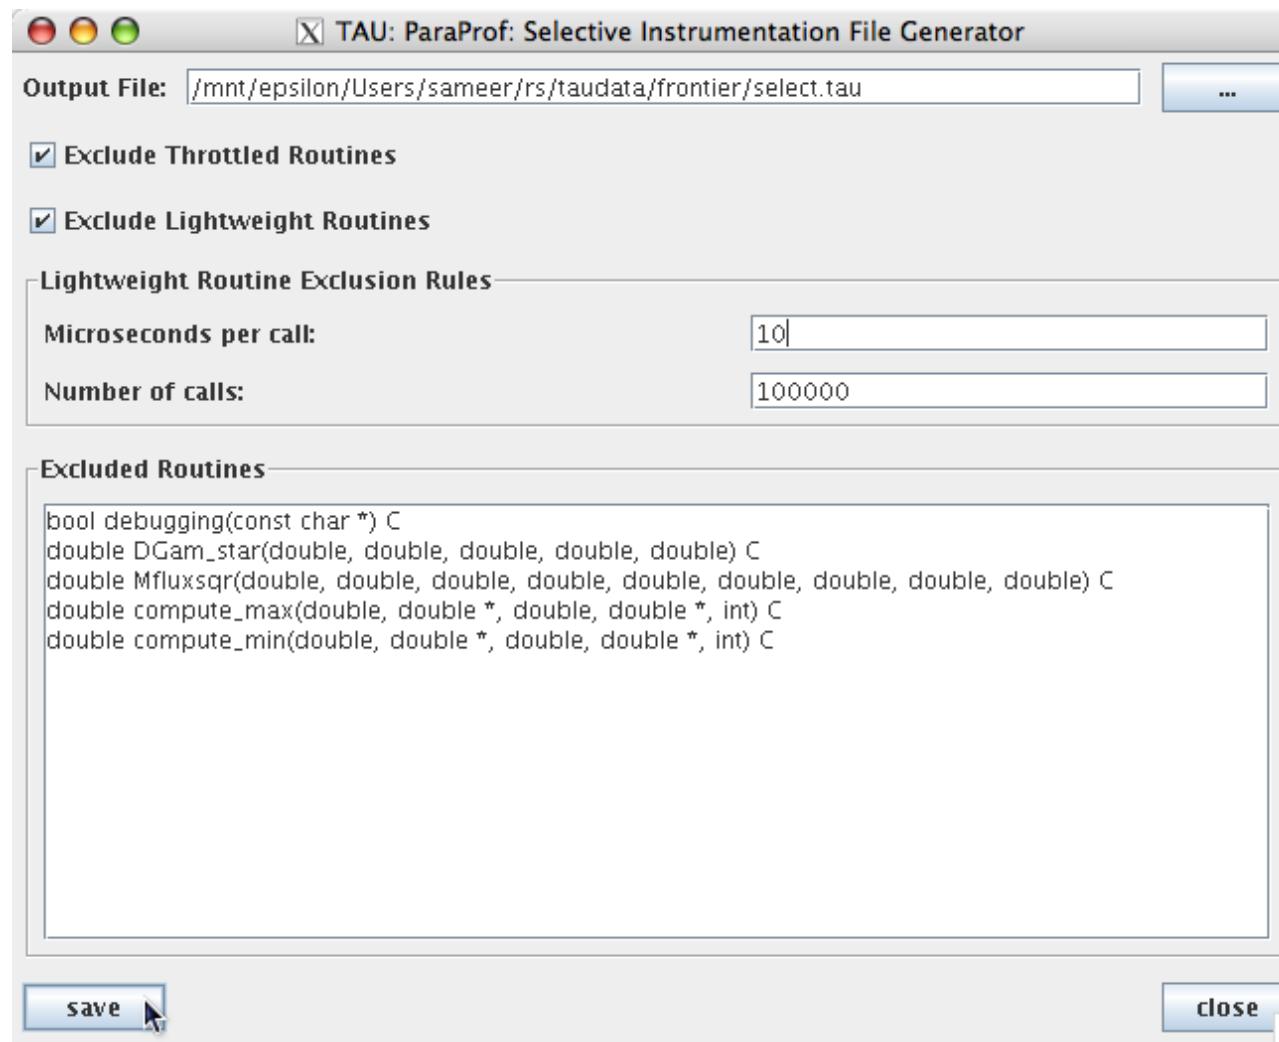

---

# Observing I/O bandwidth and volume

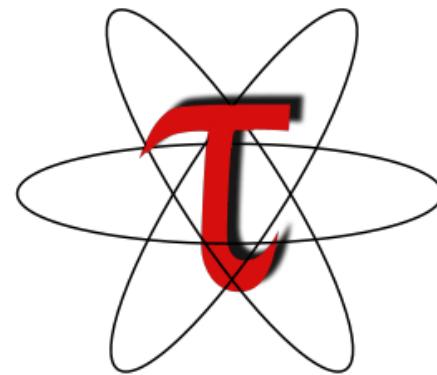

## Library interposition/wrapping: `tau_exec`, `tau_wrap`

---

- TAU provides a wealth of options to measure the performance of an application
- Need to simplify TAU usage to easily evaluate performance properties, including I/O, memory, and communication
- Designed a new tool (*tau\_exec*) that leverages runtime instrumentation by pre-loading measurement libraries
- Works on dynamic executables (default under Linux)
- Substitutes I/O, MPI, and memory allocation/deallocation routines with instrumented calls
  - Interval events (e.g., time spent in `write()`)
  - Atomic events (e.g., how much memory was allocated)
- Measure I/O and memory usage

# TAU Execution Command (tau\_exec)

---

- Configure TAU with –iowrapper configuration option
- Uninstrumented execution
  - % mpirun –np 256 ./a.out
- Track MPI performance
  - % mpirun –np 256 **tau\_exec** ./a.out
- Track I/O and MPI performance (MPI enabled by default)
  - % mpirun –np 256 **tau\_exec –io** ./a.out
- Track memory operations
  - % setenv TAU\_TRACK\_MEMORY\_LEAKS 1
  - % mpirun –np 256 **tau\_exec –memory** ./a.out
- Track I/O performance and memory operations
  - % mpirun –np 256 **tau\_exec –io –memory** ./a.out
- **Track GPGPU operations**
  - % mpirun –np 256 **tau\_exec –cuda** ./a.out

ParaTools

---

## A New Approach: tau\_exec

---

- Runtime instrumentation by pre-loading the measurement library
- Works on dynamic executables (default under Linux)
- Substitutes I/O, MPI and memory allocation/deallocation routines with instrumented calls
- Track interval events (e.g., time spent in `write()`) as well as atomic events (e.g., how much memory was allocated) in wrappers
- Accurately measure I/O and memory usage

## Issues

---

- Heap memory usage reported by the mallinfo() call is not 64-bit clean.
  - 32 bit counters in Linux roll over when > 4GB memory is used
  - We keep track of heap memory usage in 64 bit counters inside TAU
- Compensation of perturbation introduced by tool
  - Only show what application uses
  - Create guards for TAU calls to not track I/O and memory allocations/de-allocations performed inside TAU
- Provide broad POSIX I/O and memory coverage

# I/O Calls Supported

---


Unbuffered I/O	Buffered I/O	Communication	Control	Asynchronous I/O
open	fopen	socket	fcntl	aio_read
open64	fopen64	pipe	rewind	aio_write
close	fdopen	socketpair	lseek	aio_suspend
read	freopen	bind	lseek64	aio_cancel
write	fclose	accept	fseek	aio_return
readv	fprintf	connect	dup	lio_listio
writev	fscanf	recv	dup2	
creat	fwrite	send	mkstep	
creat64	fread	sendto	tmpfile	
		recvfrom		
		pclose		

# Tracking I/O in Each File

TAU: ParaProf: Context Events for thread: n,c,t, 1,0,0 - IOR\_mana\_iotreads\_posix.ppk

	Name	Total	NumSamples	MaxValue	MinValue	MeanValue	Std. Dev.
TAU application							
MPI_Finalize0							
MPI_Init0							
fscanf0							
read0							
Bytes Read		20,024	32	8,192	4	625.75	2,014.699
Bytes Read <file="/opt/openmpi/tm/intel/1.4/etc/openmpi-mca-params.conf">		2,812	1	2,812	2,812	2,812	0
Bytes Read <file="/opt/openmpi/tm/intel/1.4/share/openmpi/help-mpi-btl-openib.txt">		8,192	1	8,192	8,192	8,192	0
Bytes Read <file="/opt/openmpi/tm/intel/1.4/share/openmpi/mca-btl-openib-device-params.ini">		8,727	2	8,192	535	4,363.5	3,828.5
Bytes Read <file="/sys/class/infiniband/mthca0/node_type">		8	1	8	8	8	0
Bytes Read <file="/sys/class/infiniband/mthca0/ports/1/gids/0">		41	1	41	41	41	0
Bytes Read <file="/sys/class/infiniband_verbs/abi_version">		8	1	8	8	8	0
Bytes Read <file="/sys/class/infiniband_verbs/verbs0/abi_version">		8	1	8	8	8	0
Bytes Read <file="/sys/class/infiniband_verbs/verbs0/device/device">		24	3	8	8	8	0
Bytes Read <file="/sys/class/infiniband_verbs/verbs0/device/vendor">		24	3	8	8	8	0
Bytes Read <file="/sys/class/infiniband_verbs/verbs0/ibdev">		64	1	64	64	64	0
Bytes Read <file="/sys/devices/system/cpu/cpu0/topology/core_id">		7	1	7	7	7	0
Bytes Read <file="/sys/devices/system/cpu/cpu0/topology/physical_package_id">		7	1	7	7	7	0
Bytes Read <file="/sys/devices/system/cpu/cpu1/topology/core_id">		7	1	7	7	7	0
Bytes Read <file="/sys/devices/system/cpu/cpu1/topology/physical_package_id">		7	1	7	7	7	0
Bytes Read <file="/sys/devices/system/cpu/cpu2/topology/core_id">		7	1	7	7	7	0
Bytes Read <file="/sys/devices/system/cpu/cpu3/topology/core_id">		7	1	7	7	7	0
Bytes Read <file="/sys/devices/system/cpu/cpu3/topology/physical_package_id">		7	1	7	7	7	0
Bytes Read <file="/sys/devices/system/cpu/cpu4/topology/core_id">		7	1	7	7	7	0
Bytes Read <file="/sys/devices/system/cpu/cpu4/topology/physical_package_id">		7	1	7	7	7	0
Bytes Read <file="/sys/devices/system/cpu/cpu5/topology/core_id">		7	1	7	7	7	0
Bytes Read <file="/sys/devices/system/cpu/cpu5/topology/physical_package_id">		7	1	7	7	7	0
Bytes Read <file="/sys/devices/system/cpu/cpu6/topology/core_id">		7	1	7	7	7	0
Bytes Read <file="/sys/devices/system/cpu/cpu6/topology/physical_package_id">		7	1	7	7	7	0
Bytes Read <file="/sys/devices/system/cpu/cpu7/topology/core_id">		7	1	7	7	7	0
Bytes Read <file="/sys/devices/system/cpu/cpu7/topology/physical_package_id">		7	1	7	7	7	0
Bytes Read <file="pipe">		4	1	4	4	4	0
READ Bandwidth (MB/s)		2,932.118	32	1,170.286	0.001	91.629	269.282
READ Bandwidth (MB/s) <file="/opt/openmpi/tm/intel/1.4/etc/openmpi-mca-params.conf">		312.444	1	312.444	312.444	312.444	0
READ Bandwidth (MB/s) <file="/opt/openmpi/tm/intel/1.4/share/openmpi/help-mpi-btl-openib.txt">		1,170.286	1	1,170.286	1,170.286	1,170.286	0
READ Bandwidth (MB/s) <file="/opt/openmpi/tm/intel/1.4/share/openmpi/mca-btl-openib-device-params.i		1,291.5	2	1,024	267.5	645.75	378.25
READ Bandwidth (MB/s) <file="/sys/class/infiniband/mthca0/node_type">		4	1	4	4	4	0
READ Bandwidth (MB/s) <file="/sys/class/infiniband/mthca0/ports/1/gids/0">		0.304	1	0.304	0.304	0.304	0
READ Bandwidth (MB/s) <file="/sys/class/infiniband_verbs/abi_version">		4	1	4	4	4	0
READ Bandwidth (MB/s) <file="/sys/class/infiniband_verbs/verbs0/abi_version">		4	1	4	4	4	0
READ Bandwidth (MB/s) <file="/sys/class/infiniband_verbs/verbs0/device/device">		16	3	8	4	5.333	1.886
READ Bandwidth (MB/s) <file="/sys/class/infiniband_verbs/verbs0/device/vendor">		20	3	8	4	6.667	1.886
READ Bandwidth (MB/s) <file="/sys/class/infiniband_verbs/verbs0/ibdev">		32	1	32	32	32	0


# Time Spent in POSIX I/O write()

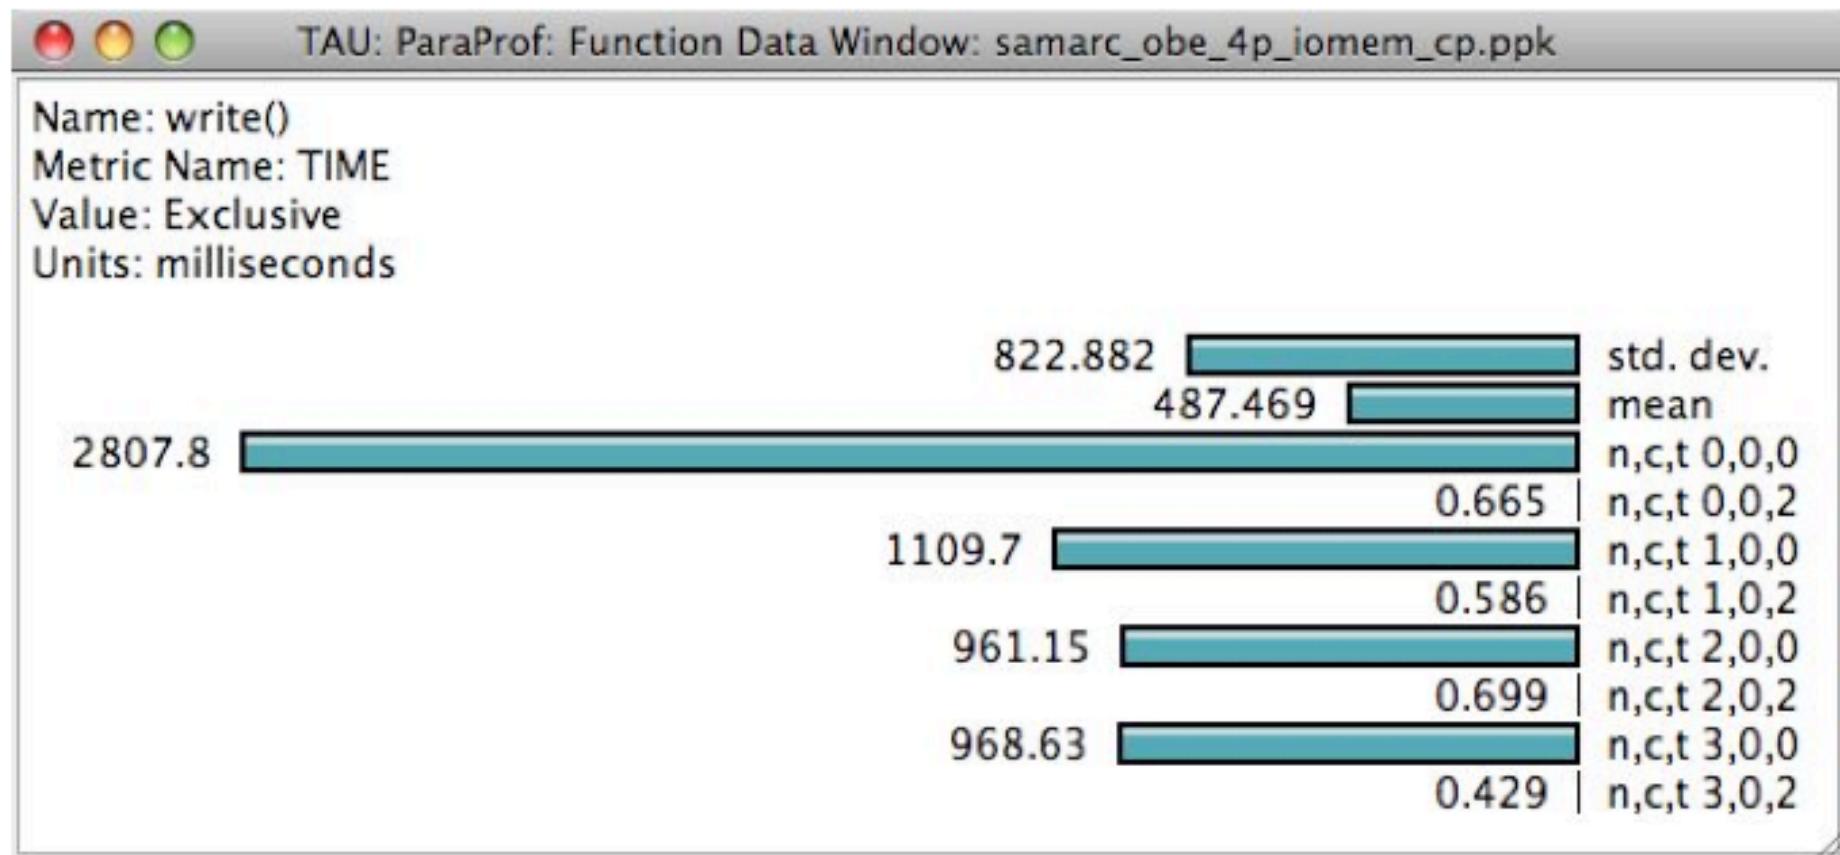

# Volume of I/O by File, Memory

TAU: ParaProf: Context Events for thread: n,c,t, 1,0,0 - samarc_obe_4p_iomem_cp.ppk						
	Name ▼	Total	MeanValue	NumSamples	MinValue	MaxValue
						Std. Dev.
▼ .TAU application						
► read()						
► fopen64()						
► fclose()						
▼ OurMain()						
malloc size		25,235	1,097.174	23	11	12,032 2,851.143
free size		22,707	1,746.692	13	11	12,032 3,660.642
▼ OurMain [{wrapper.py}{3}]						
► read()						
malloc size		3,877	323.083	12	32	981 252.72
free size		1,536	219.429	7	32	464 148.122
► fopen64()						
► fclose()						
▼ <module> [{obe.py}{8}]						
▼ writeRestartData [{samarcInterface.py}{145}]						
▼ samarcWriteRestartData						
▼ write()						
WRITE Bandwidth (MB/s) <file="samarc/restore.00002/nodes.00004/proc.00001">		74.565	117	0	2,156.889	246.386
WRITE Bandwidth (MB/s) <file="samarc/restore.00001/nodes.00004/proc.00001">		77.594	117	0	1,941.2	228.366
WRITE Bandwidth (MB/s)		76.08	234	0	2,156.889	237.551
Bytes Written <file="samarc/restore.00002/nodes.00004/proc.00001">		2,097,552	17,927.795	117	1	1,048,576 133,362.946
Bytes Written <file="samarc/restore.00001/nodes.00004/proc.00001">		2,097,552	17,927.795	117	1	1,048,576 133,362.946
Bytes Written		4,195,104	17,927.795	234	1	1,048,576 133,362.946
► open64()						

# Bytes Written

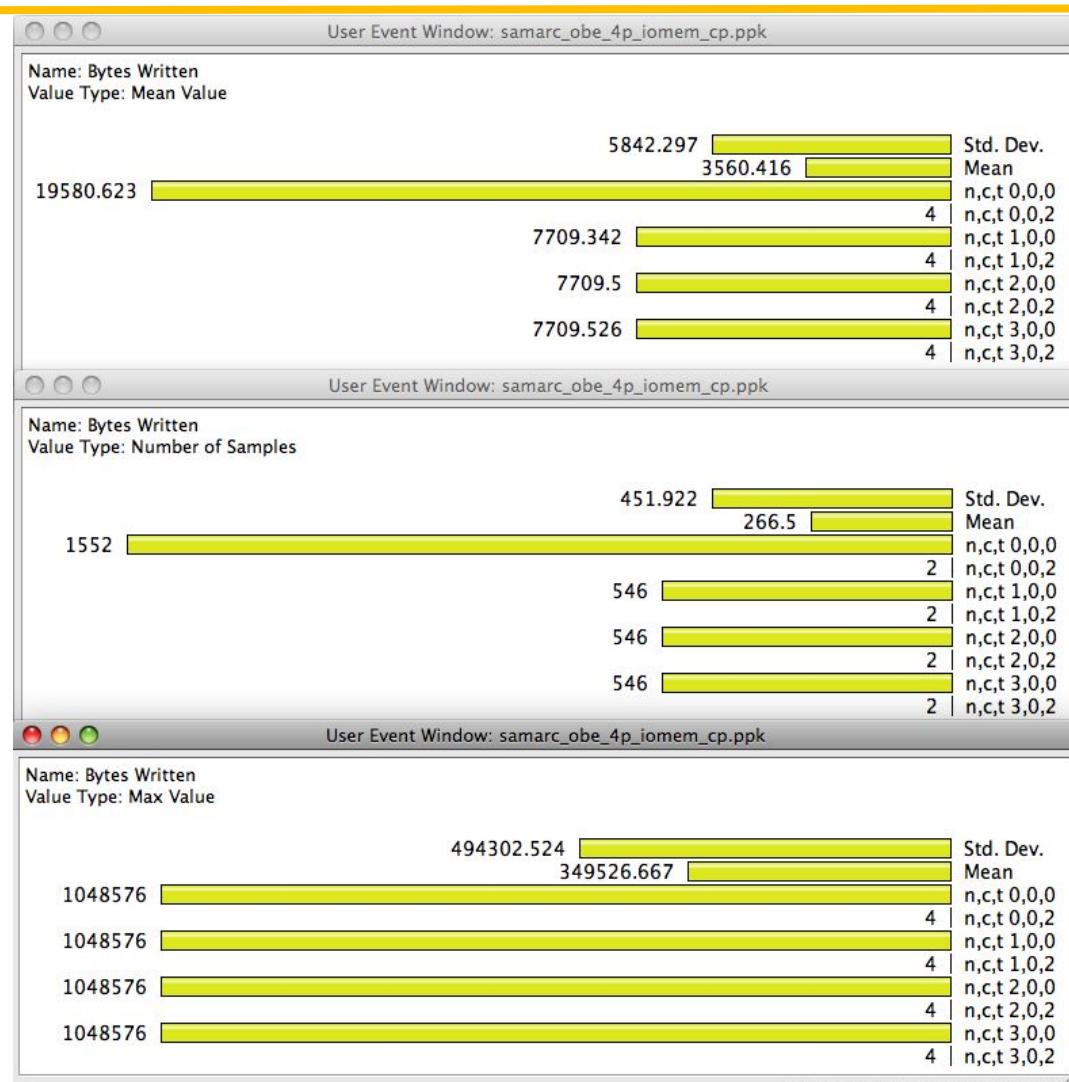


# Memory Leaks in MPI

TAU: ParaProf: Context Events for thread: n,c,t, 0,0,0 – samarc_obe_4p_iomem_cp.ppk						
Name	Total	MeanValue	NumSamples	MaxValue	MinValue	Std. Dev.
.TAU application						
MPI_Finalize()						
free size	23,901,253	22,719.822	1,052	2,099,200	2	186,920.948
malloc size	5,013,902	65,972.395	76	5,000,000	2	569,732.815
MEMORY LEAK!	5,000,264	500,026.4	10	5,000,000	3	1,499,991.2
read()						
Bytes Read	4	4	1	4	4	0
READ Bandwidth (MB/s) <file="pipe">		0.308	1	0.308	0.308	0
Bytes Read <file="pipe">	4	4	1	4	4	0
READ Bandwidth (MB/s)		0.308	1	0.308	0.308	0
write()						
WRITE Bandwidth (MB/s)		0.635	102	12	0	1.472
Bytes Written <file="/dev/infiniband/rdma_cm">	24	24	1	24	24	0
Bytes Written	1,456	14.275	102	28	4	5.149
WRITE Bandwidth (MB/s) <file="/dev/infiniband/uverbs0">		0.528	97	12	0.089	1.32
Bytes Written <file="pipe">	64	16	4	28	4	12
WRITE Bandwidth (MB/s) <file="/dev/infiniband/rdma_cm">		1.714	1	1.714	1.714	0
Bytes Written <file="/dev/infiniband/uverbs0">	1,368	14.103	97	24	12	4.562
WRITE Bandwidth (MB/s) <file="pipe">		2.967	4	5.6	0	2.644
writev()						
WRITE Bandwidth (MB/s)		4.108	2	7.667	0.549	3.559
Bytes Written	297	148.5	2	230	67	81.5
WRITE Bandwidth (MB/s) <file="socket">		4.108	2	7.667	0.549	3.559
Bytes Written <file="socket">	297	148.5	2	230	67	81.5
readv()						
Bytes Read	112	28	4	36	20	8
READ Bandwidth (MB/s) <file="socket">		25.5	4	36	10	11.079
Bytes Read <file="socket">	112	28	4	36	20	8
READ Bandwidth (MB/s)		25.5	4	36	10	11.079
MPI_Comm_free()						
free size	10,952	195.571	56	1,024	48	255.353
> read()						
> MPI_Type_free()						
> MPI_Init()						
fopen64()						
free size	231,314	263.456	878	568	35	221.272
MEMORY LEAK!	1,105,956	1,868.169	592	7,200	32	3,078.574
malloc size	1,358,286	901.318	1,507	7,200	32	2,087.737
> OurMain()						
> fclose()						

---

# PAPI hardware counters

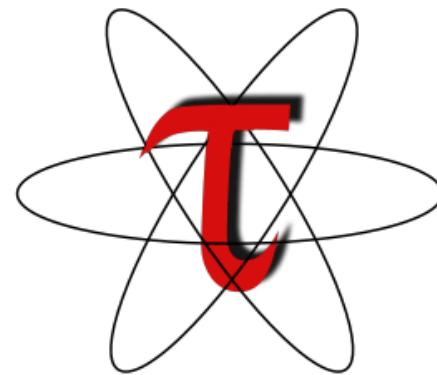

# Hardware Counters

---

Hardware performance counters available on most modern microprocessors can provide insight into:

1. Whole program timing
2. Cache behaviors
3. Branch behaviors
4. Memory and resource access patterns
5. Pipeline stalls
6. Floating point efficiency
7. Instructions per cycle

Hardware counter information can be obtained with:

1. Subroutine or basic block resolution
2. Process or thread attribution



# What's PAPI?

- Open Source software from U. Tennessee, Knoxville
- <http://icl.cs.utk.edu/papi>
- Middleware to provide a consistent programming interface for the performance counter hardware found in most major microprocessors.
- Countable events are defined in two ways:
  - Platform-neutral *preset* events
  - Platform-dependent native events
- Presets can be **derived** from multiple *native events*
- All events are referenced by name and collected in EventSets

# PAPI Utilities: *papi\_avail*

```
$ utils/papi_avail -h
Usage: utils/papi_avail [options]
Options:

General command options:
-a, --avail    Display only available preset events
-d, --detail   Display detailed information about all preset events
-e EVENTNAME   Display detail information about specified preset or native event
-h, --help      Print this help message

Event filtering options:
--br           Display branch related PAPI preset events
--cache        Display cache related PAPI preset events
--cnd          Display conditional PAPI preset events
--fp           Display Floating Point related PAPI preset events
--ins          Display instruction related PAPI preset events
--idl          Display Stalled or Idle PAPI preset events
--l1           Display level 1 cache related PAPI preset events
--l2           Display level 2 cache related PAPI preset events
--l3           Display level 3 cache related PAPI preset events
--mem          Display memory related PAPI preset events
--msc          Display miscellaneous PAPI preset events
--tlb          Display Translation Lookaside Buffer PAPI preset events

This program provides information about PAPI preset and native events.
PAPI preset event filters can be combined in a logical OR.
}
```

# PAPI Utilities: *papi\_avail*

```
$ utils/papi_avail
Available events and hardware information.

-----
PAPI Version          : 4.0.0.0
Vendor string and code : GenuineIntel (1)
Model string and code  : Intel Core i7 (21)
CPU Revision          : 5.000000
CPUID Info            : Family: 6 Model: 26 Stepping: 5
CPU Megahertz         : 2926.000000
CPU Clock Megahertz   : 2926
Hdw Threads per core : 1
Cores per Socket      : 4
NUMA Nodes             : 2
CPU's per Node         : 4
Total CPU's            : 8
Number Hardware Counters : 7
Max Multiplex Counters : 32
-----

The following correspond to fields in the PAPI_event_info_t structure.
```

[MORE...]

# PAPI Utilities: *papi\_avail*

[CONTINUED...]

```
-----  
The following correspond to fields in the PAPI_event_info_t structure.
```

Name	Code	Avail	Deriv	Description (Note)
PAPI_L1_DCM	0x80000000	No	No	Level 1 data cache misses
PAPI_L1_ICM	0x80000001	Yes	No	Level 1 instruction cache misses
PAPI_L2_DCM	0x80000002	Yes	Yes	Level 2 data cache misses
[...]				
PAPI_VEC_SP	0x80000069	Yes	No	Single precision vector/SIMD instructions
PAPI_VEC_DP	0x8000006a	Yes	No	Double precision vector/SIMD instructions

```
-----  
of 107 possible events, 34 are available, of which 9 are derived.
```

avail.c

PASSED

# PAPI Utilities: *papi\_avail*

```
$ utils/papi_avail -e PAPI_FP_OPS
[...]
-----
The following correspond to fields in the PAPI_event_info_t structure.

Event name:          PAPI_FP_OPS
Event Code:          0x80000066
Number of Native Events: 2
Short Description: |FP operations|
Long Description: |Floating point operations|
Developer's Notes: ||
Derived Type:        |DERIVED_ADD|
Postfix Processing String: ||
Native Code[0]: 0x4000801b |FP_COMP_OPS_EXE:SSE_SINGLE_PRECISION|
Number of Register Values: 2
Register[ 0]: 0x0000000f |Event Selector|
Register[ 1]: 0x00004010 |Event Code|
Native Event Description: |Floating point computational micro-ops, masks:SSE* FP single precision Uops|

Native Code[1]: 0x4000081b |FP_COMP_OPS_EXE:SSE_DOUBLE_PRECISION|
Number of Register Values: 2
Register[ 0]: 0x0000000f |Event Selector|
Register[ 1]: 0x00008010 |Event Code|
Native Event Description: |Floating point computational micro-ops, masks:SSE* FP double precision Uops|
-----
```

# PAPI Utilities: *papi\_native\_avail*

```
UNIX> utils/papi_native_avail
Available native events and hardware information.

-----
[...]
Event Code  Symbol  | Long Description |
-----
0x40000010  BR_INST_EXEC  | Branch instructions executed
  40000410  :ANY  | Branch instructions executed
  40000810  :COND  | Conditional branch instructions executed
  40001010  :DIRECT  | Unconditional branches executed
  40002010  :DIRECT_NEAR_CALL  | Unconditional call branches executed
  40004010  :INDIRECT_NEAR_CALL  | Indirect call branches executed
  40008010  :INDIRECT_NON_CALL  | Indirect non call branches executed
  40010010  :NEAR_CALLS  | Call branches executed
  40020010  :NON_CALLS  | All non call branches executed
  40040010  :RETURN_NEAR  | Indirect return branches executed
  40080010  :TAKEN  | Taken branches executed
-----
0x40000011  BR_INST_RETIRIED  | Retired branch instructions
  40000411  :ALL_BRANCHES  | Retired branch instructions (Precise Event)
  40000811  :CONDITIONAL  | Retired conditional branch instructions (Precise
    | Event)
  40001011  :NEAR_CALL  | Retired near call instructions (Precise Event)
-----
[...]
```

# PAPI Utilities: *papi\_native\_avail*

```
UNIX> utils/papi_native_avail -e DATA_CACHE_REFILLS
Available native events and hardware information.

-----
[...]
-----

The following correspond to fields in the PAPI_event_info_t structure.

Event name:           DATA_CACHE_REFILLS
Event Code:          0x4000000b
Number of Register Values: 2
Description:         |Data Cache Refills from L2 or System|
Register[ 0]:   0x0000000f |Event Selector|
Register[ 1]:   0x00000042 |Event Code|


Unit Masks:
Mask Info:           |:SYSTEM|Refill from System|
Register[ 0]:   0x0000000f |Event Selector|
Register[ 1]:   0x00000142 |Event Code|
Mask Info:           |:L2_SHARED|Shared-state line from L2|
Register[ 0]:   0x0000000f |Event Selector|
Register[ 1]:   0x00000242 |Event Code|
Mask Info:           |:L2_EXCLUSIVE|Exclusive-state line from L2|
Register[ 0]:   0x0000000f |Event Selector|
Register[ 1]:   0x00000442 |Event Code|
```

# PAPI Utilities: *papi\_event\_chooser*

```
$ utils/papi_event_chooser PRESET PAPI_FP_OPS
Event Chooser: Available events which can be added with given events.

-----
[...]
-----

      Name      Code   Deriv Description (Note)
PAPI_L1_DCM 0x80000000  No  Level 1 data cache misses
PAPI_L1_ICM 0x80000001  No  Level 1 instruction cache misses
PAPI_L2_ICM 0x80000003  No  Level 2 instruction cache misses
[...]
PAPI_L1_DCA 0x80000040  No  Level 1 data cache accesses
PAPI_L2_DCR 0x80000044  No  Level 2 data cache reads
PAPI_L2_DCW 0x80000047  No  Level 2 data cache writes
PAPI_L1_ICA 0x8000004c  No  Level 1 instruction cache accesses
PAPI_L2_ICA 0x8000004d  No  Level 2 instruction cache accesses
PAPI_L2_TCA 0x80000059  No  Level 2 total cache accesses
PAPI_L2_TCW 0x8000005f  No  Level 2 total cache writes
PAPI_FML_INS 0x80000061  No  Floating point multiply instructions
PAPI_FDV_INS 0x80000063  No  Floating point divide instructions
-----

Total events reported: 34
event_chooser.c          PASSED
```

# PAPI Utilities: *papi\_event\_chooser*

```
$ utils/papi_event_chooser PRESET PAPI_FP_OPS PAPI_L1_DCM
Event Chooser: Available events which can be added with given events.

-----
[...]
-----

      Name      Code   Deriv Description (Note)
PAPI_TOT_INS 0x80000032  No    Instructions completed
PAPI_TOT_CYC 0x8000003b  No    Total cycles

-----
Total events reported: 2
event_chooser.c          PASSED
```

# PAPI Utilities: *papi\_event\_chooser*

```
$ utils/papi_event_chooser NATIVE RESOURCE_STALLS:LD_ST X87_OPS_RETired  
INSTRUCTIONS_RETired  
[...]  
-----  
UNHALTED_CORE_CYCLES      0x40000000  
|count core clock cycles whenever the clock signal on the specific core is running (not  
    halted). Alias to event CPU_CLK_UNHALTED:CORE_P|  
|Register Value[0]: 0x20003          Event Selector|  
|Register Value[1]: 0x3c            Event Code|  
-----  
UNHALTED_REFERENCE_CYCLES      0x40000002  
|Unhalted reference cycles. Alias to event CPU_CLK_UNHALTED:REF|  
|Register Value[0]: 0x40000          Event Selector|  
|Register Value[1]: 0x13c          Event Code|  
-----  
CPU_CLK_UNHALTED      0x40000028  
|Core cycles when core is not halted|  
|Register Value[0]: 0x60000          Event Selector|  
|Register Value[1]: 0x3c            Event Code|  
    0x40001028 :CORE_P  |Core cycles when core is not halted|  
    0x40008028 :NO_OTHER |Bus cycles when core is active and the other is halted|  
-----  
Total events reported: 3  
event_chooser.c           PASSED
```

# Usage Scenarios: Calculate mflops in Loops


---

- Goal: What MFlops am I getting in all loops?
- Flat profile with PAPI\_FP\_INS/OPS and time with loop instrumentation:

Metric: PAPI\_FP\_INS / GET\_TIME\_OF\_DAY

Value: Exclusive

Units: Derived metric shown in microseconds format

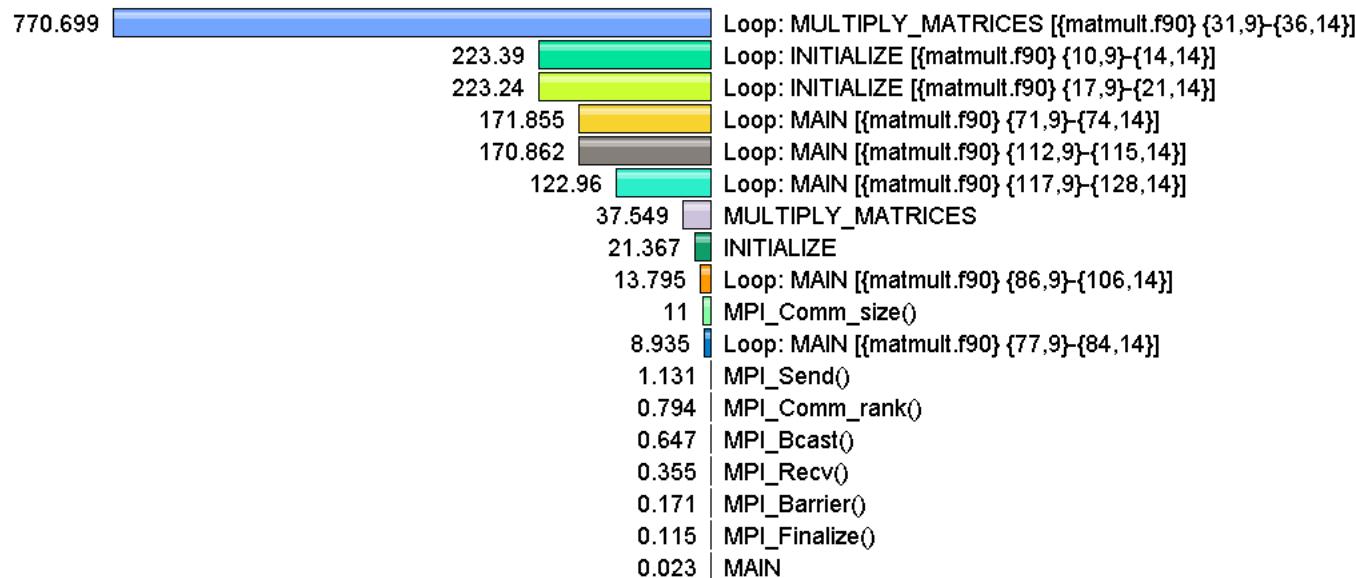

# Generate a PAPI profile with 2 or more counters

```
% export TAU_MAKEFILE=$TAU_ROOT/lib/Makefile.tau-papi-mpi-pdt-pgi
% export TAU_OPTIONS=' -optTauSelectFile=select.tau -optVerbose'
% cat select.tau
BEGIN_INSTRUMENT_SECTION
loops routine="#"
END_INSTRUMENT_SECTION

% export PATH=$TAU_ROOT/bin:$PATH
% make F90=tau_f90.sh
(Or edit Makefile and change F90=tau_f90.sh)
%
% export TAU_METRICS=TIME:PAPI_FP_INS:PAPI_L1_DCM
%srun -n 4 -p specops ./a.out
% paraprof --pack app.ppk
  Move the app.ppk file to your desktop.
% paraprof app.ppk
  Choose Options -> Show Derived Panel -> "PAPI_FP_INS", click "/", "TIME", click "Apply"
  choose.
```

# Derived Metrics in ParaProf

TAU: ParaProf Manager

File Options Help

Applications

- Standard Applications
- Default App
- Default Exp
- f90/root/
- TIME
- PAPI\_L1\_DCM
- PAPI\_FP\_INS

TrialField	Value
Trial ID	0
CPU Cores	6
CPU MHz	2600.093
CPU Type	Six-Core AMD Opteron(tm) Processor 8435
CPU Vendor	AuthenticAMD
CWD	/root/f90
Cache Size	512 KB
Executable	/root/f90/ring.i
File Type Index	1
File Type Name	Tau profiles
Hostname	b2e45.corning.com
Local Time	2010-04-18T02:27:58-04:00
MPI Processor Name	b2e45.corning.com
Memory Size	66006592 kB
Node Name	b2e45.corning.com
OS Machine	x86_64
OS Name	Linux
OS Release	2.6.18-128.el5.perfctr
OS Version	#1 SMP Mon Jun 29 12:32:22 PDT 2009
Starting Timestamp	1271572078767980
TAU Architecture	x86_64
TAU Config	-c++=g++ -cc=gcc -fortran=gfortran -mpilib=/usr/nic/dev/intel/impi/3.2.2.006/lib64 -mpilinc=/usr/nic/dev/intel/impi/3.2.2.006/in...
TAU Makefile	/usr/corning/apps/paratools/tau-2.19.1/x86_64/lib/Makefile.tau-intelmpi-papi-mpi-pdt
TAU Version	tau-2.19.1
TAU_CALLPATH	off
TAU_CALLPATH_DEPTH	2
TAU_COMM_MATRIX	off
TAU_COMPENSATE	off
TAU_PROFILE	on
TAU_PROFILE_FORMAT	profile
TAU_THROTTLE	on
TAU_THROTTLE_NUMCALLS	100000
TAU_THROTTLE_PERCALL	10
TAU_TRACE	off
TAU_TRACK_HEADROOM	off
TAU_TRACK_HEAP	off
TAU_TRACK_MESSAGE	off
Timestamp	1271572078835079

Expression: "PAPI\_FP\_INS"/"PAPI\_L1\_DCM"

# ParaProf's Source Browser: Loop Level Instrumentation

The image displays three windows from the ParaProf tool interface, illustrating loop-level instrumentation:

- TAU: ParaProf: Function Data Window: s3d\_callpath\_papi.ppk** (Top Left):
 

Name: Loop: TRANSPORT\_M::COMPUTESPECIESDIFFFLUX [{mixavg\_transport\_m.pp.f90} (630,5)-(656,19)]  
 Metric Name: PAPI\_FP\_INS / GET\_TIME\_OF\_DAY  
 Value: Exclusive  
 Units: Derived metric shown in microseconds format

	std. dev.
114.979	1.088
117.62	mean
115.134	n,ct 0,0,0
114.709	n,ct 1,0,0
114.615	n,ct 2,0,0
113.547	n,ct 3,0,0
114.581	n,ct 4,0,0
114.837	n,ct 5,0,0
114.789	n,ct 6,0,0
114.789	n,ct 7,0,0
- TAU: ParaProf: Function Data Window: s3d\_callpath\_papi.ppk** (Middle Left):
 

Name: Loop: TRANSPORT\_M::COMPUTESPECIESDIFFFLUX [{mixavg\_transport\_m.pp.f90} (630,5)-(656,19)]  
 Metric Name: GET\_TIME\_OF\_DAY  
 Value: Exclusive percent

	std. dev.
12.206%	0.91%
11.931%	mean
12.19%	n,ct 0,0,0
12.248%	n,ct 1,0,0
12.258%	n,ct 2,0,0
12.335%	n,ct 3,0,0
12.241%	n,ct 4,0,0
12.221%	n,ct 5,0,0
12.226%	n,ct 6,0,0
12.226%	n,ct 7,0,0
- TAU: ParaProf: Source Browser: /mnt/epsilon/Users/sameer/rs/taudata/s3d/harness/flat/papi8** (Right):
 

```

grad_mixMW(:,:,m) = grad_mixMW(:,:,m)*avmolwt(:,:)
end do


! compute grad_P
if (baro_switch) then
  allocate(grad_P(nx,ny,nz,3))
  grad_P = 0.0
  if (vary_in_x == 1) then
    call derivative_x( nx,ny,nz, Press, grad_P(:,:,:1), scale_1x, 1 )
  endif
  if (vary_in_y == 1) then
    call derivative_y( nx,ny,nz, Press, grad_P(:,:,:2), scale_1y, 1 )
  endif
  if (vary_in_z == 1) then
    call derivative_z( nx,ny,nz, Press, grad_P(:,:,:3), scale_1z, 1 )
  endif
endif

! Changed by Ramanan - 01/24/05
! Ds_mixavg is now \rho*D
!
! grad_P/press and avmolwt*grad_T/Temp can be optimized by division before the loop.
! compute diffusive flux for species n in direction m.
diffFlux(:,:,:n_spec,:) = 0.0
DIRECTION: do m=1,3
  SPECIES: do n=1,n_spec-1
    if (baro_switch) then
      ! driving force includes gradient in mole fraction and baro-diffusion:
      diffFlux(:,:,:n,m) = - Ds_mixavg(:,:,:n) * ( grad_Ys(:,:,:n,m) &
        + Ys(:,:,:n) * ( grad_mixMW(:,:,m) &
        + (1 - molwt(n)*avmolwt) * grad_P(:,:,m)/Press) )
    else
      ! driving force is just the gradient in mole fraction:
      diffFlux(:,:,:n,m) = - Ds_mixavg(:,:,:n) * ( grad_Ys(:,:,:n,m) &
        + Ys(:,:,:n) * grad_mixMW(:,:,m) )
    endif
    !
    ! Add thermal diffusion:
    if (thermdiff_switch) then
      diffFlux(:,:,:n,m) = diffFlux(:,:,:n,m) &
        - Ds_mixavg(:,:,:n) * Rs_therm_diff(:,:,:n) * molwt(n) &
        * avmolwt * grad_T(:,:,m) / Temp
    endif
    !
    ! compute contribution to nth species diffusive flux
    ! this will ensure that the sum of the diffusive fluxes is zero.
    diffFlux(:,:,:n_spec,m) = diffFlux(:,:,:n_spec,m) - diffFlux(:,:,:n,m)
  enddo SPECIES
  enddo DIRECTION
  if (baro_switch) then
    deallocate(grad_P)
  endif
  return
end subroutine computeSpeciesDiffFlux
!$=====
subroutine computeStressTensor( grad_u)

```

---

# Estimation of tool intrusiveness

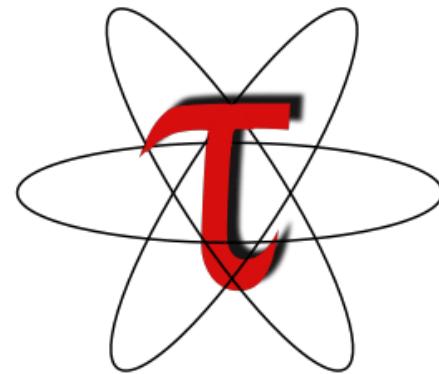

# PAPI Utilities: *papi\_cost*

```
$ utils/papi_cost -h
This is the PAPI cost program.
It computes min / max / mean / std. deviation for PAPI start/stop pairs;
for PAPI reads, and for PAPI_accums.

Usage:

    cost [options] [parameters]
    cost TESTS_QUIET

Options:

    -b BINS      set the number of bins for the graphical
                 distribution of costs. Default: 100
    -d           show a graphical distribution of costs
    -h           print this help message
    -s           show number of iterations above the first
                 10 std deviations
    -t THRESHOLD set the threshold for the number of
                 iterations. Default: 100,000
```

# PAPI Utilities: *papi\_cost*

```
$ utils/papi_cost
Cost of execution for PAPI start/stop and PAPI read.
This test takes a while. Please be patient...
Performing start/stop test...

Total cost for PAPI_start/stop(2 counters) over 1000000 iterations
min cycles      : 63
max cycles      : 17991
mean cycles     : 69.000000
std deviation: 34.035263
Performing start/stop test...

Performing read test...

Total cost for PAPI_read(2 counters) over 1000000 iterations
min cycles      : 288
max cycles      : 102429
mean cycles     : 301.000000
std deviation: 144.694053
cost.c          PASSED
```


# PAPI Utilities: *papi\_cost*

```
Cost distribution profile

 63:*****999969 counts *****
153:
243:
[...]
1863:
1953:*****
2043:
2133:*****
2223:
2313:
2403:*****
2493:*****
2583:*****
2673:*****
2763:*****
2853:*****
2943:
3033:*****
3123:*****
3213:*****
3303:
3393:
3483:
3573:
3663:*****
```

---

# Hands-on training with sample codes

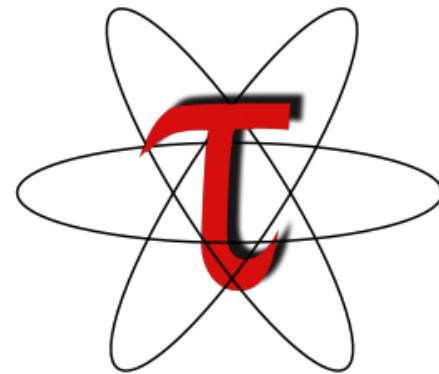

# Labs!

---



Lab: PAPI, and TAU

# Lab Instructions (for OCF systems)

---

Get `workshop.tar.gz` using:

```
% wget  
http://www.paratools.com/sandiall/workshop.tar.gz
```

Or

```
% cp /projects/tau/tar/workshop.tar.gz;  
tar zxf workshop.tar.gz
```

And follow the instructions in the `README` file.

<http://tau.uoregon.edu/point.iso> LiveDVD

For LiveDVD, see `~/workshop-point/README` and follow.

# Lab Instructions

---

To profile a code using TAU:

1. Change the compiler name to `tau_cxx.sh`,  
`tau_f90.sh`, `tau_cc.sh`:  
`F90 = tau_f90.sh`

2. Choose TAU stub makefile  
`% source /projects/tau/tau.bashrc [ or .cshrc]`  
`% export TAU_MAKEFILE=`  
`$TAU_ROOT/lib/Makefile.tau-[options]`

3. If stub makefile has `-papi` in its name, set the `TAU_METRICS` environment variable:  
`% export`  
`TAU_METRICS=TIME:PAPI_L2_DCM:PAPI_TOT_CYC...`

4. Run: `srun -n 4 -p specops ./a.out`
5. Build and run workshop examples, then run `pprof/paraprof`


Paratools

---

# Support Acknowledgements

---

- Department of Energy (DOE)
  - Office of Science contracts
  - LLNL-LANL-SNL ASC/NNSA Level 3 contract
- Department of Defense (DoD)
  - HPCMO, PETTT, HPTi
- National Science Foundation (NSF)
  - POINT
  - SI2
- University of Oregon
  - Dr. A. Malony, W. Spear,  
S. Biersdorff, S. Millstein, Dr. C. Lee
- University of Tennessee, Knoxville
  - Dr. Shirley Moore
- T.U. Dresden, GWT
  - Dr. Wolfgang Nagel and Dr. Andreas Knupfer
- Research Centre Juelich
  - Dr. Bernd Mohr, Dr. Felix Wolf



ParaTools